

Energy Management Energy Meter Type **GNM3T, GNM3T-RS485, GNM3T-MBUS**



- Three phase energy meter
 - Class B (kWh) according to EN50470-3
 - Accuracy $\pm 0.5\%$ RDG (current/voltage)
 - Current measurement via CT
 - Backlit LCD display (3x 8-digit) with integrated touch key-pad
 - Energy readout on display: 8 digit
 - Variable readout on display: 4 digit
 - Energy measurement: kWh and kvarh; kWh+ by 2 tariffs; kWh per phase
 - System variables: kW, kvar, kVA, VLL, VLN, PF, Hz, kWdmd, kWdmd peak
 - Phase variables: kW, kvar, kVA, VLL, VLN, A, PF
 - Pulse output (GNM3T)
 - RS485 Modbus port (GNM3T-RS485)
 - M-bus port (GNM3T-MBUS)
 - Run hour meter
 - Neutral current calculation
- Digital input (for tariff management)
 - Certified according to MID Directive
 - Auxiliary power supply
 - Dimensions: 3-DIN module
 - Protection degree (front): IP51

Product description

Three-phase energy meter with backlit LCD display with integrated touch keypad. Particularly indicated for active energy metering and for cost allocation (CT connection), with dual tariff management availability. It measures imported energy (consumption). Housing for DIN-rail mounting, with IP51 front degree protection. The meter is optionally provided with pulse output proportional to the active energy being measured, RS485 Modbus port or M-bus port. Available for legal metrology.

MID Certified according to MID Directive, Module "B" and Module "D" of Annex II, for legal metrology relevant to active electrical energy meters (see Annex V, MI003, of MID). Can be used for fiscal (legal) metrology.

How to order:

GNM3T: Pulse output
GNM3T-RS485: RS485 port
GNM3T-MBUS: M-bus port

Range code

400 VLL AC - 5(6)A
 (CT connection)

System

3: 3-phase, 3 or 4 wire

Power supply

H: auxiliary power supply 90 to 260V ac/dc

Input specifications

Rated Inputs		Display and touch key-pad	
Current type	3-phase loads, CT connection	Type	Backlit LCD, 3 rows by 8-digit each, h 7 mm
Current range	5(6)A	Read-out	Energy: 8 digit. Variables: 4 digit
Nominal voltage	400 to 480 VLL ac	Touch key	3 (DOWN, Enter and UP).
Max CTxVT	1000	Max. and Min. indication	
Accuracy (@25°C ±5°C, R.H. ≤60%, 50Hz)		Energies	Max. 99 999 999 Min. 0.01
	Imin=0.25A; In: 5A, Imax: 6A; Un: 230 to 277 VLN (400 to 480 VLL)	Variables	Max. 9999 Min. 0.01
Current	From 0.04In to 0.2In: ±(0.5%RDG+1DGT) From 0.2In to Imax: ±(0.5%RDG)	Memory	
Phase-neutral voltage	In the range Un: ±(0.5% RDG)	Energy	10 ¹² cycles. Energy value is saved every time the less significant digit increases.
Phase-phase voltage	In the range Un: ±(1% RDG)	Programming parameters	10 ¹² cycles. When a parameter is modified, only the relevant memory cell is overwritten
Frequency	50Hz.	LEDs	
Active power	From 0.05 In to Imax, within Un range, PF=1: ±(1% RDG)	Flashing red light pulses	Proportional to the product of the CT and VT ratios
	From 0.1 In to Imax, within Un range, PF=0.5L or 0.8C: ±(1% RDG)	Weight (pulses/kWh) 1	> 700,1 (CT x VT)
Power factor	±[0.001+1%(1.000 - "PF RDG")]	Weight (pulses/kWh) 10	70.1–700 (CT x VT)
Reactive power	From 0.05 In to Imax, within Un range, sinphi=1: ±(2% RDG)	Weight (pulses/kWh) 100	7.1–70 (CT x VT)
	From 0.1 In to Imax, within Un range, sinphi=0.5L or 0.8C: ±(2% RDG)	Weight (pulses/kWh) 1000	< 7.1 (CT x VT)
		Duration	90ms
Energies		Current overloads	
Active energy	Class B (kWh) according to EN50470-3 (MID Annex MI-003 Class B)	Continuous For 500ms	6A, @ 50Hz 5 In
Reactive energy	Class 2 according to EN62053-23	Voltage Overloads	
Start-up current:	10mA	Continuous For 500ms	1.2 Un 2 Un
Start-up voltage	90VLN	Input impedance	
Resolution	Display/serial communication	230VL-N	1.2Mohm
Current	0.1/0.001 A	5(6) A	< 1.25VA
Voltage	0.1/0.1 V	Wrong connection detection	Installation guide to indicate if connections are correctly carried out. Can be disabled.
Power	0.01 kW or kvar/ 0.1 W or var	Phase sequence	Indicates if the phase sequence is not the correct one (L1-L2-L3)
Frequency	0.1 Hz/0.1Hz		
PF	0.01/ 0.001		
Energies (positive)	0.01 kWh or kvarh / 0.1 kWh or kvarh		
Energies (negative)	0.01 kWh or kvarh / 0.1 kWh or kvarh		
Energy additional errors			
Influence quantities	According to EN62053-21		
Temperature drift	≤200ppm/°C		
Sampling rate	4096 samples/s @ 50Hz 4096 samples/s @ 60Hz		

Digital input specifications

Digital inputs	Free of voltage contact	Overload	In case a voltage is erroneously applied to the digital input, the input is not damaged up to 30 V ac/dc.
Function	Tariff management (switch between t1-t2)		
Number of inputs	1		
Contact measurement voltage	5 V		
Contact resistance	≤1kohm, close contact ≥100kohm, open contact		

Output specifications

RS485 serial port	RS485 by screw connection.	Primary address	Selectable
Function	For communication of measured data, programming parameters	Secondary address	Univocally defined in each unit
Protocol	ModBus RTU (slave function)	Identification number range	from 9000 0000 to 9999 9999
Baud rate	9.6, 19.2, 38.4, 57.6, 115.2 kbaud,	Other	Available functions: wild card, header, initialisation SND_NKE, and req_udr management. Management of primary address modification via M-bus and reset of partial energy via M-bus available.
Data format	even or no parity,		VIF, VIFE, DIF and DIFE: see protocoll
Address	1 to 247 (default: 01)		
Driver input capability	1/8 unit load. Maximum 247 devices on the same bus.	Static output	
Data refresh time	1sec	Purpose	For pulse output proportional to the active energy (kWh)
Read command	50 words available in 1 read command	Pulse rate	Pulse weight: same as LED pulse weight, proportional to the product of the CT and VT ratios (see LED specification table on the previous page)
Rx/Tx indication	Rx segment on display is shown when a valid Modbus command is sent to that specific meter Tx segment on display is shown when a valid Modbus reply is sent back to the master	Pulse ON duration	Selectable: 30ms or 100 ms according to EN62052-31
M-bus port	M-bus by screw connection.	Output type	Open collector PNP
Function	For communication of measured data	Load	V _{ON} 1 V dc max. 100mA V _{OFF} 80 V dc max.
Protocol	M-bus according to EN13757-1		
Baud rate	0.3, 2.4, 9.6 kbaud		
Meters in the M-bus network	250		

General specifications

Operating temperature	-25 to +55 °C (-13 to 131° F), indoor, (R.H. from 0 to 90% non-condensing @ 40°C)	Radio frequency	According to CISPR 22
Storage temperature	-30°C to +80°C (-22 to 176° F) (R.H. < 90% non condensing @ 40°C)	Standard compliance	EN62052-11
Overvoltage category	Cat. III	Safety	EN62053-21, EN50470-3
Insulation (for 1 minute)	4000 V ac RMS between measuring inputs and digital/serial output (see table) 4000 V ac RMS	Metrology	CE, MID
Dielectric strength	4000 V ac RMS for 1 minute	Approvals	
EMC	According to EN62052-11	Connections	
Electrostatic discharges	15kV air discharge;	Cable cross-section area	Voltage inputs: max. 4 mm ² , min. 1 mm ² with/without metallic cable ferrule; Max. screw tightening torque: 0.6 Nm
Immunity to irradiated electromagnetic fields	Test with current: 10V/m from 80 to 2000MHz;	Other terminals	1.5 mm ² , Min./Max. screws tightening torque: 0.4 Nm
Electromagnetic fields	Test without any current: 30V/m from 80 to 2000MHz;	Housing	
Burst	On current and voltage measuring inputs circuit: 4kV	Dimensions (WxHxD)	54 x 90 x 63 mm
Immunity to conducted disturbances	10V/m from 150KHz to 80MHz	Material	Noryl, self-extinguishing: UL 94 V-0
Surge	On current and voltage measuring inputs circuit: 4kV;	Sealing covers	Included
		Mounting	DIN-rail
		Protection degree	
		Front	IP51
		Screw terminals	IP20
		Weight	Approx. 240 g (packing included)

Power supply specifications

Auxiliary power supply

H: 90 to 260 V ac/dc

Power consumption

≤ 1W, ≤ 10VA



Insulation (for 1 minute) between inputs and outputs

	Measuring input	Digital or serial output	Digital input
Measuring input	-	4 kV	4 kV
Digital or serial output	4 kV	-	0 kV
Digital input	4 kV	0 kV	-

Accuracy (according to EN50470-3 and EN62053-23)

kWh, accuracy (RDG) depending on the current

kvarh, accuracy (RDG) depending on the current

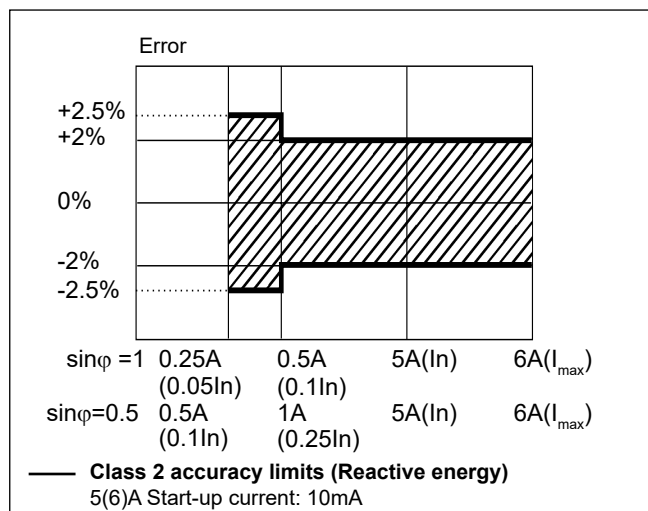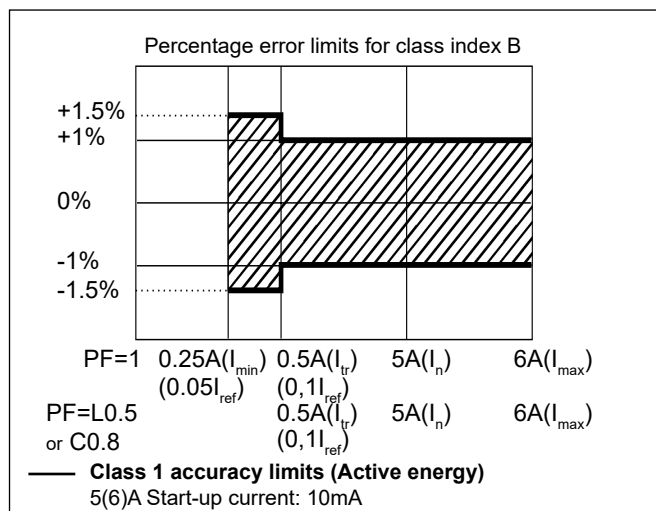

Display pages










1 st row	2 nd row	3 rd row	“Full” mode	“Easy” mode	Note
kWh+ (imported)		kW system	X	X	
kWh+ (imported)		V L-L system	X	X	
kWh+ (imported)		V L-N system	X	X	
kWh+ (imported)		PF system	X		
kWh+ (imported)		Hz	X		
kvarh+ (imported)		Kvar system	X	X	
kWh+ (imported)		kVA system	X		
kWh+ (imported)	kWdmd peak	kWdmd	X		
kWh (t1)	“t1”	kW system	X	X	Only relevant to kWh+, with Tariff menu set to ON.
kWh (t2)	“t2”	kW system	X	X	Only relevant to kWh+, with Tariff menu set to ON.
kWh L1	kWh L2	kWh L3	X		
kVA L1	kVA L2	kVA L3	X		
kvar L1	kvar L2	kvar L3	X		
PF L1	PF L2	PF L3	X		
V L1-N	V L2-N	V L3-N	X		
V L1-2	V L2-3	V L3-1	X		
run hour meter		An	X		
A L1	A L2	A L3	X	X	
kW L1	kW L2	kW L3	X		

X= available


Additional available information on the display

Page	Display	Description
Info 1	YEA r (2018)	Year of production
Info 2	SE rIAL n (dddnnnA)	Serial number (ddd= day of the year; nnn=progressive number; A= production line, internal use only)
Info 3	rEVI SIon (A.01)	Firmware revision
Info 4	PuLS LE d	Pulse rate of front LED (pulse/kWh)
P3	SYStEM	System type
P4	CT ratio	current transformer ratio
P5	VT ratio	voltage transformer ratio
P7	InStALL	Wrong connection detection function
P8	P Int	Integration time for Wdmd calculation
P9	ModE	Set of variables on display
P10	tArIFF	Tariff enabling (and current tariff if enabled)
P12-1	PuLSE (GNM3T)	Selection of pulse ON duration of output
P12-2	PuLrAtE (GNM3T)	Selection of the pulse rate of output
P13	PrI Add (GNM3T-MBUS)	M-bus primary address
P14	AddrESS (GNM3T-RS485)	Modbus serial address
P15	bAud (GNM3T-MBUS / GNM3T-RS485)	M-bus or Modbus baud rate
P16-1	PARtY (GNM3T-RS485)	Modbus parity
P16-2	StoP bIt (GNM3T-RS485)	Stop bit (in case of No parity only)
Info 5	Secondary address (GNM3T-MBUS)	M-bus secondary address

Wiring diagrams

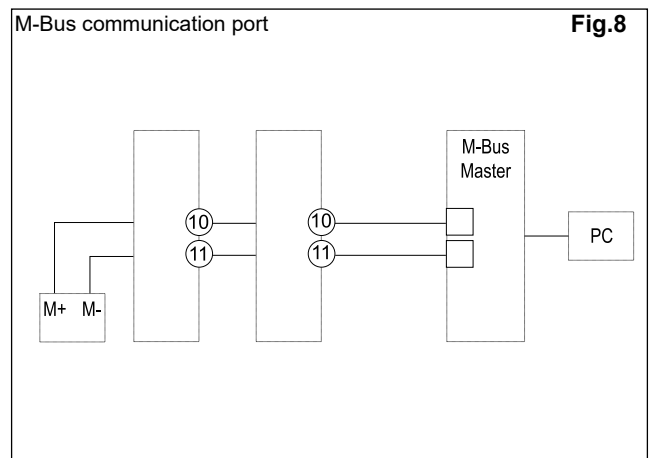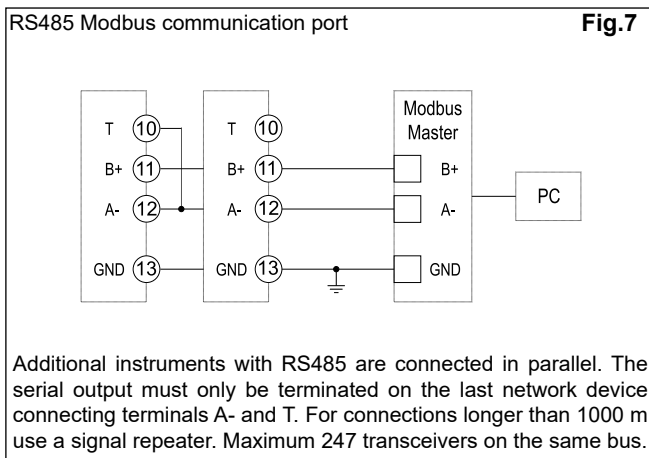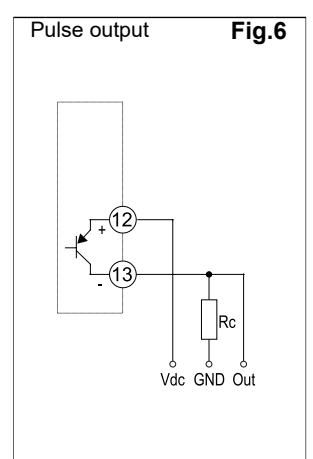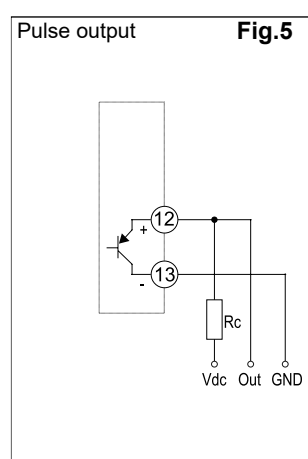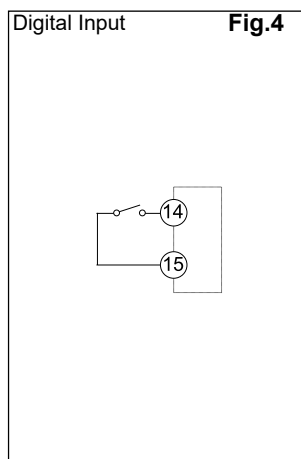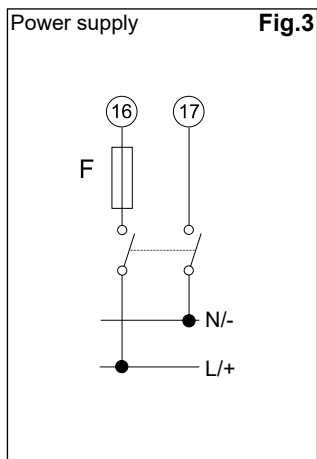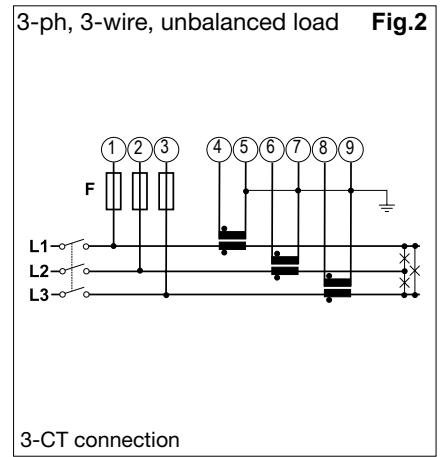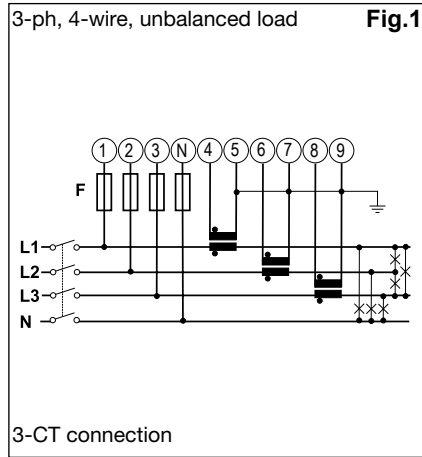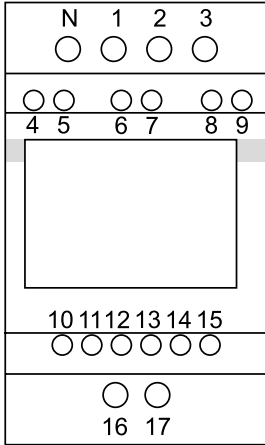

Front panel description

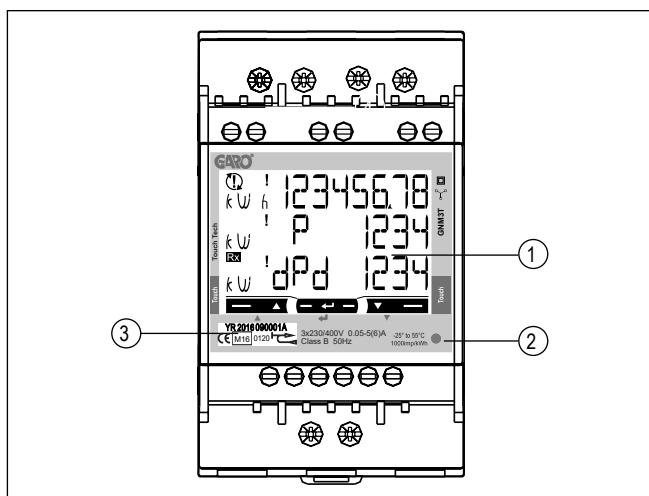

1. **Display**
Backlit LCD display with touch key-pad.
2. **LED**
LED proportional to kWh reading
3. **Serial number**
Area reserved to serial number and MID-relevant data

Dimensions

