


PLL 25.675.30.2/DALI


PL 25 (1xLED 75W 830/3000K 5500lm)

— C0/C180 cd / 1000 lm - - - C90/C270

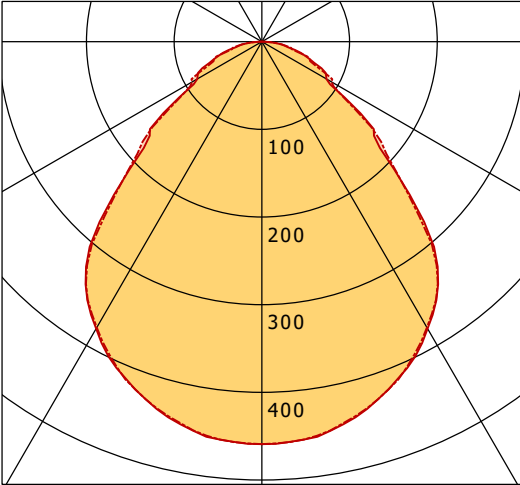

	C0	C90	C180	C270
0°	459	459	459	459
15°	439	438	439	438
30°	378	376	378	376
45°	226	225	226	225
60°	85	92	85	92
75°	43	37	43	37
90°	1	1	1	1
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

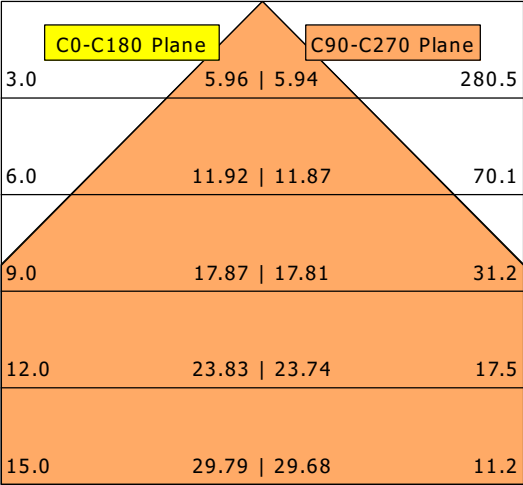

η		LED
Efficiency		73 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		75 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		19.5
UGR C90/C270		19.6
CIE Flux Codes		60 86 97 100 100
Ra/CRI		> 80