


# Stratio | Free-Standing (1xLED 79W 840/4000K 10885lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

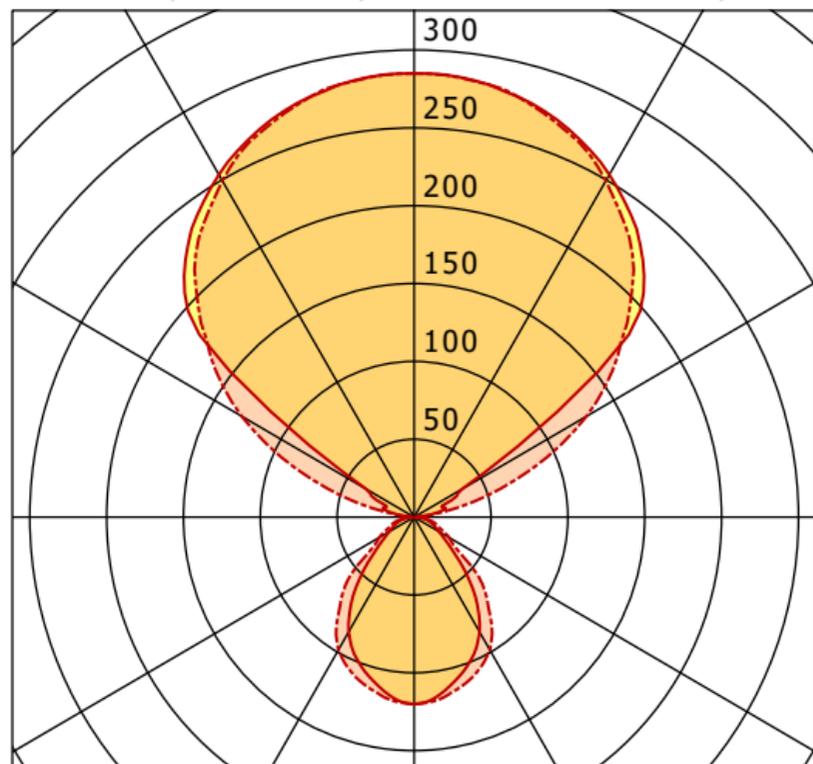

	C0	C90	C180	C270
0°	120	120	120	120
30°	85	99	85	99
60°	19	26	19	26
90°	1	1	1	1
120°	36	130	36	130
150°	254	249	254	249
180°	285	285	285	285
cd / 1000 lm				

LDC unsuitable for cone representation.  
The C0 angle is oversized.

<b>η</b> Efficiency	LED 138 lm/W
Direct/Indirect System Power	↓ 24% / ↑ 76% 79 W
<b>UGR</b> Reflection factors	X=4H, Y=8H 70/50/20
UGR C0/C180	15.4
UGR C90/C270	17.0
CIE Flux Codes	60 86 97 24 100
Ra/CRI	> 80