


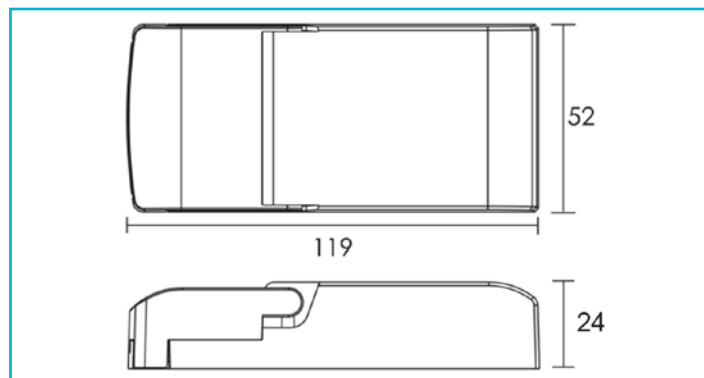

- Can be dimmed using Dali1/Dali2
- Can be dimmed using 230 V push button [on/off, brightness]
- Intelli-Push function [shortcut synchronises all connected power supply units when needed]
- Current range adjustable using DIP switch
- Can be operated without actuation/dimming
- Dimming range 1-100 %
- Flicker-free
- Short circuit and overload protection
- Safe against overheating

Special features

- Can be dimmed using Dali1/Dali2
- Can be dimmed using 230 V push button [on/off, brightness]
- Intelli-Push function [shortcut synchronises all connected power supply units when needed]
- Current range adjustable using DIP switch
- Can be operated without actuation/dimming
- Dimming range 1-100 %
- Flicker-free
- Short circuit/overload protection, overheating protection

Housing Material	Plastic
Housing Color	Black
Operating Mode	Constant current
Protection Class	Protection class II/protective insulation
Power	5.0-25 W
Output Voltage	20-60 V/DC
Output Current Selectable	260 mA, 350 mA, 400 mA, 450 mA, 500 mA, 550 mA, 600 mA, 700 mA
Dimmable	Yes
Control	DALI 2 / DT6, Intelli Push-Dim
Number of Channels	1
Power Factor	0.97
Connection Type	Clamp

Number of Circuit Breaker B10A max.	23
Number of Circuit Breaker B16A max.	37
Number of Circuit Breaker C10A max.	46
Number of Circuit Breaker C16A max.	74
Inrush Current max.	30 A / 100 µs
Capacitive Load	205.6 nF
Reference Point Tc	80 °C
Working Temperature	-20 to 50 °C
Storage Temperature	-20 to 70 °C
IP Protection Class	IP 20

Length	119 mm
Width	52 mm
Height	24 mm
Product weight	118 g

Multi-CC variable power/voltage ranges		
Current	Power	Voltage
260mA	5,00W - 15,50W	20V - 60V
350mA	7,00W - 20,00W	20V - 60V
400mA	8,00W - 24,00W	20V - 60V
450mA	9,00W - 25,00W	20V - 55V
500mA	10,00W - 25,00W	20V - 50V
550mA	11,00W - 25,00W	20V - 45V
600mA	12,00W - 25,00W	20V - 42V
700mA	14,00W - 25,00W	20V - 36V
max. 2 lamps per channel - check voltage range!		
  		

