

Wall mounting socket outlet - housing dimensions 87x64




| Product description | |
|---------------------------|---|
| BALS-Prd.-Nr | 11928 |
| EAN | 4024941119283 |
| Product category | Wall mounting socket outlet Quick-Connect |
| Current | 16A |
| Number of poles | 3p |
| Poles | 2P+PE |
| Position of earth contact | 4 h |
| Voltage | 100 up to 130V |
| Frequency | 50 and 60Hz |

| Product description | |
|------------------------|---|
| Protection degree | IP44 |
| Colour code | yellow RAL 1012 |
| Colour of appliance | Collar yellow RAL 1012, Hinged lid yellow RAL 1012, Housing bottom grey RAL 7035, Housing top grey RAL 7035 |
| Connection design | screwless spring terminals as cage clamp with Kontex-contact |
| Maximum conductor size | 4,0 qmm |
| Cable entry | top entry M20 |
| Height | 118mm |
| Width | 64mm |
| Depth | 104mm |
| Dimension of enclosure | 87x64 mm (HxW) |
| Material of enclosure | Polyamide |
| Contact | The contact carrier is made of polyamide, The contacts are brass |

| Additional technical properties | |
|---------------------------------|---|
| | The cable entry is one at top open and one at bottom and one rear side closed |
| | Lower part of housing rotatable by 180° |

| Logistics data | |
|----------------|------------------|
| Weight/pcs | 0.181 kg / Piece |
| Packaging | Bag |

| Logistics data | |
|----------------|---------------|
| Content amount | 1 ST |
| EAN | 4024941119283 |
| Length | 104 mm |
| Width | 64 mm |
| Height | 118 mm |
| Weight | 0.182 kg |
| Volume | 785.408 ccm |
| Packaging | Carton |
| Content amount | 10 ST |
| EAN | 4024941971287 |
| Length | 258 mm |
| Width | 183 mm |
| Height | 212 mm |
| Weight | 1.962 kg |
| Volume | 8,750 ccm |

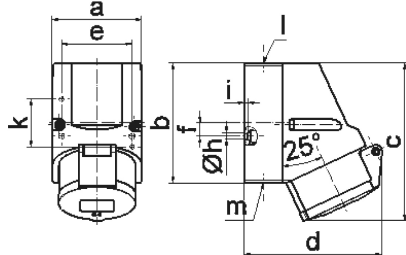

1 MB 7

| Ampere | 16 | 16 | 16 | | | |
|----------------------------|---------|---------|---------|--|--|--|
| Polzahl | 3 | 4 | 5 | | | |
| a | 64,0 | 75,0 | 75,0 | | | |
| b | 87,0 | 100,0 | 100,0 | | | |
| c | 117,0 | 129,0 | 131,0 | | | |
| d | 103,0 | 108,0 | 116,0 | | | |
| e | 51,0 | 59,0 | 59,0 | | | |
| f | - | 11,0 | 11,0 | | | |
| h ø | 4,1 | 5,1 | 5,1 | | | |
| i | 4,5 | 4,5 | 4,5 | | | |
| k | 40,0 | - | - | | | |
| l | M20 | M20 | M20 | | | |
| m | für M20 | für M20 | für M20 | | | |
| Leiter mm ² min | 1,5 | 1,5 | 1,5 | | | |
| Leiter mm ² max | 4 | 4 | 4 | | | |