



Connector Location A


Connector Location B

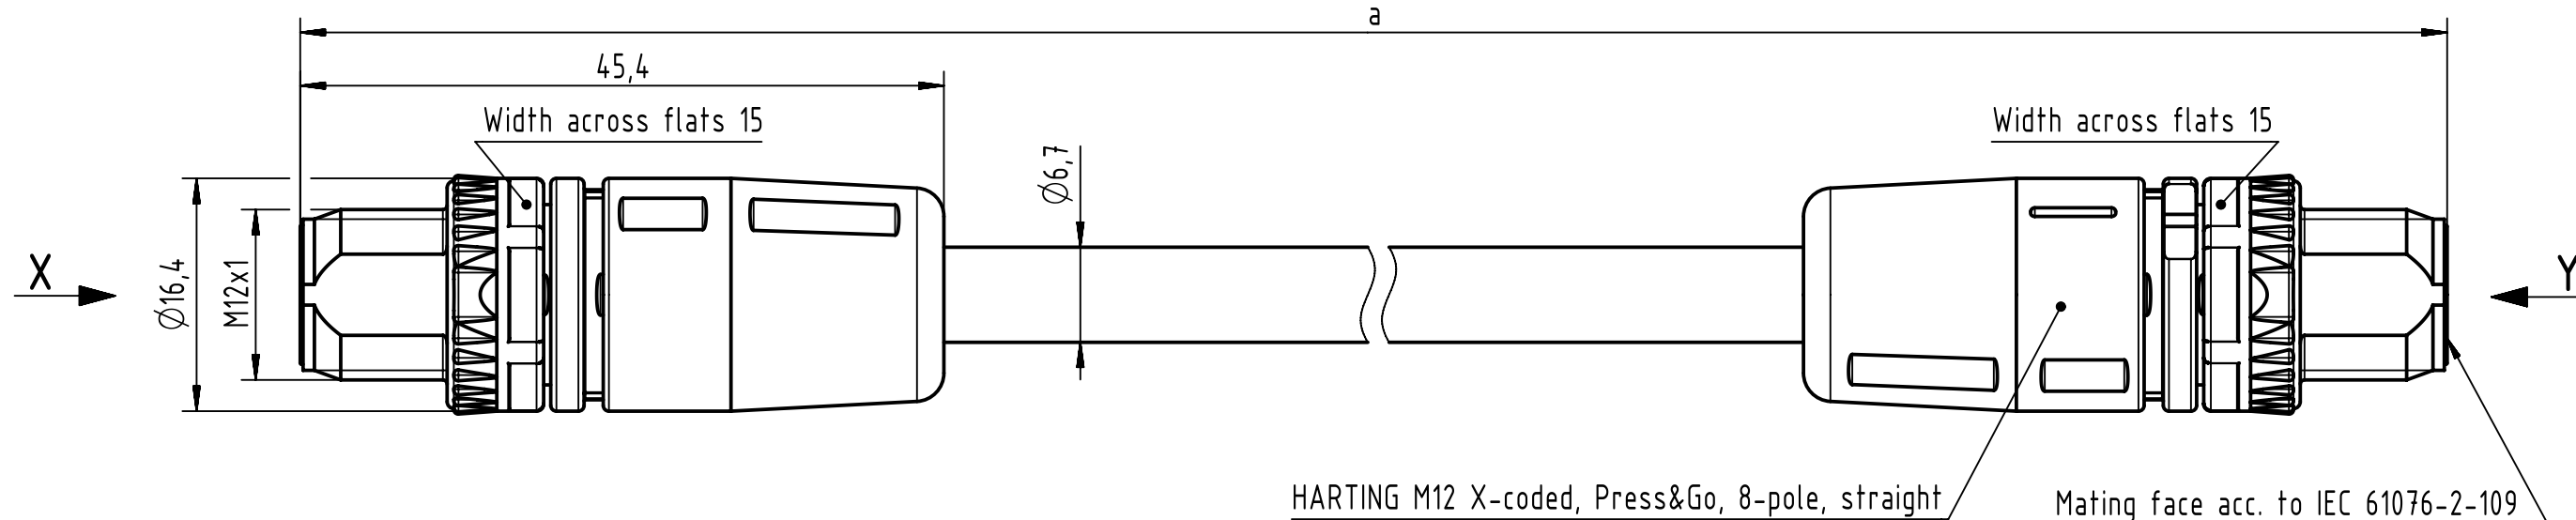



X
male

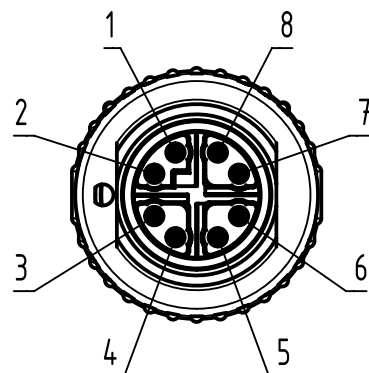

Loading Plan
acc. to TIA/EIA 568B

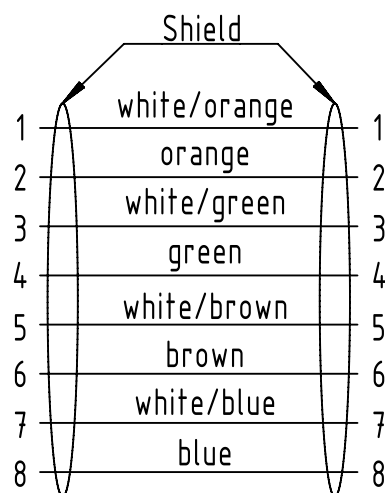

Y
male

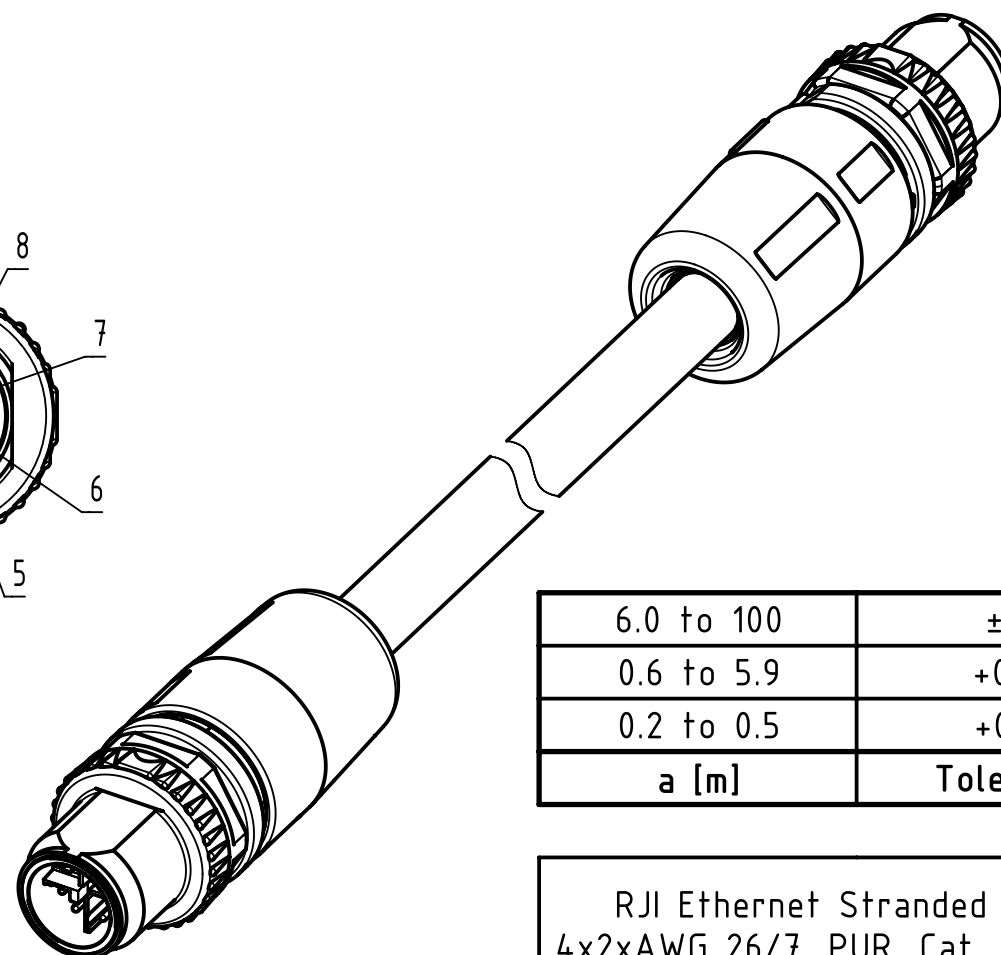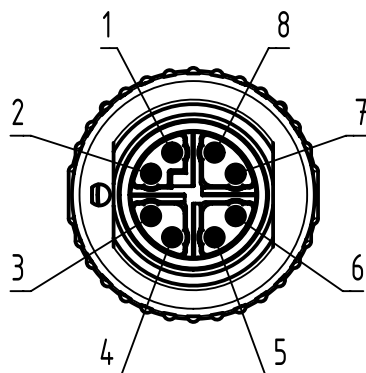

length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	12	XXX=120
length in "0.1m" step	11	XXX=110
	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.5	XXX=005
Step	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
	a [m]	XXX

6.0 to 100	±1%
0.6 to 5.9	+0.04
0.2 to 0.5	+0.02
a [m]	Tolerance

RJI Ethernet Stranded Cable, 4x2xAWG 26/7, PUR, Cat. 6A, green	21330505805XXX
Type of cable	Part no.

NOTE:

- * Ethernet transmission possible for lengths up to 45m
- Protection level: IP65/67
- Temperature range: -40°C ... +80°C

All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	
All rights reserved		Created by COSTEA Costea		Inspected by STOCHECIC Stochechi		Standardisation MUNTEANV Muntean	
Department HCS - RO		Title M12 X-cod st/st m/m PUR Green		Date 2019-12-11		State Final Release	
HARTING Customised Solutions		Type TB		Number 21330505805XXX		Doc-Key / ECM-Nr. 100858579/UGD/004/B 500000163157	
D-32339 Espelkamp		Rev. B		Page 1/1			