
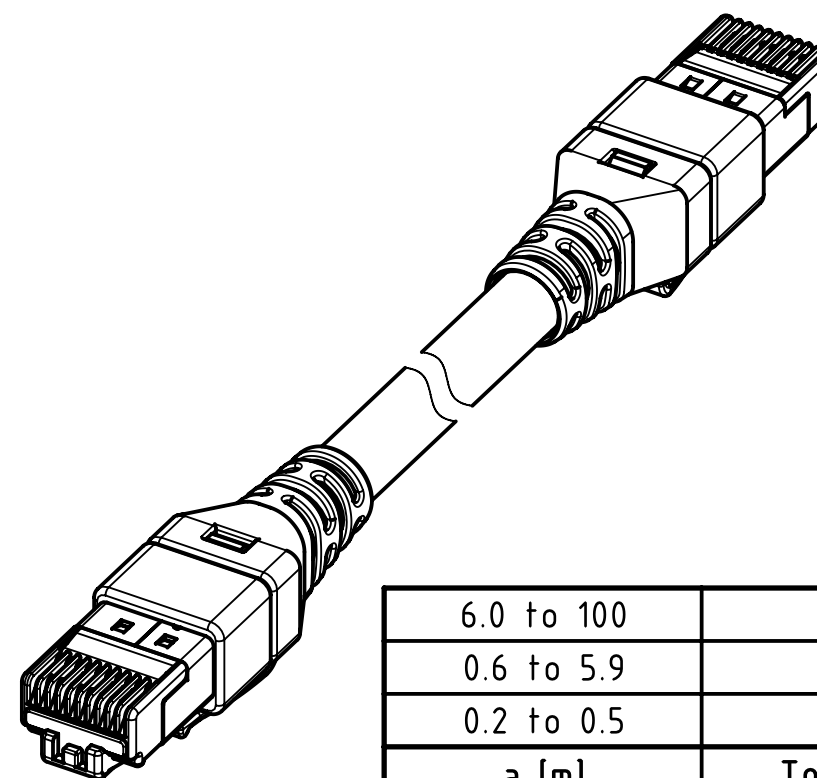
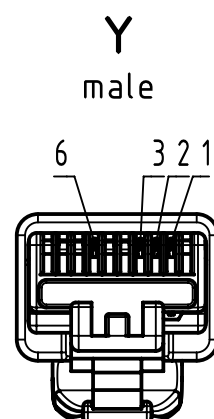
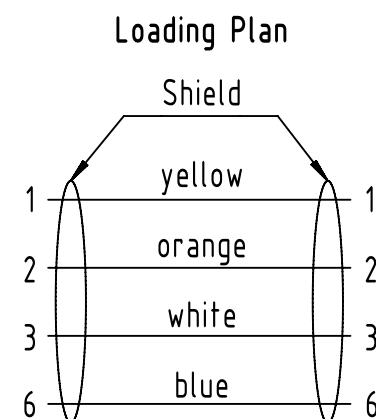
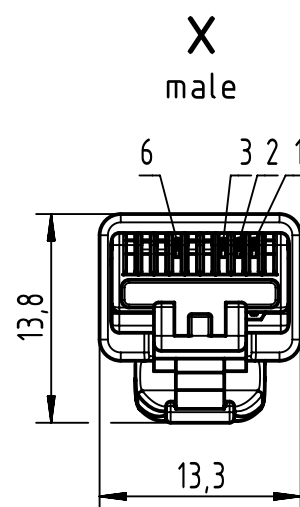


Connector Location A

Connector Location B

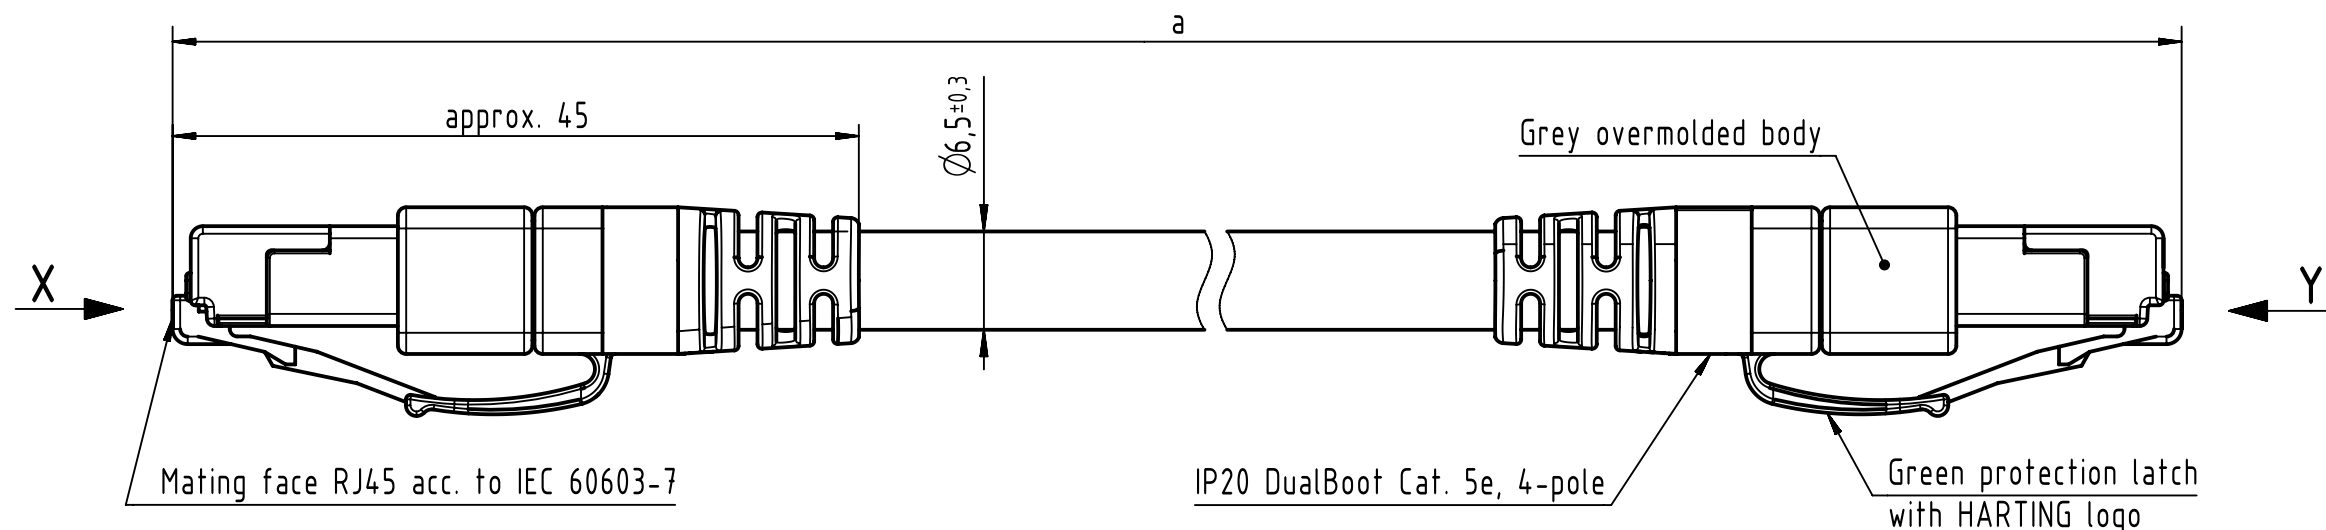

length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	12	XXX=120
length in "0.1m" step	11	XXX=110
	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.5	XXX=005
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
Step	a [m]	XXX

6.0 to 100	±1%
0.6 to 5.9	+0.04
0.2 to 0.5	+0.02
a [m]	Tolerance

NOTE:

For lengths < 1.0m:

- relative positioning of the connectors to each other shall be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30°

For lengths ≥ 1.0m:

-relative positioning of the connectors to each other not obligatory

- Temperature range: -25°C ... +60°C

HAR PROFINET Typ B
4xAWG 22/7 PVC green

09486868001XXX

Type of cable

Part no.

		All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	
All rights reserved		Created by BANCUID		Inspected by 402676		Standardisation MUNTEANV		Date 2023-07-04	
Department HCS - RO		Banciu		Gross		Muntean		State Final Release	
Title		RJ1 PROFINET cable PVC 4p; Cat. 5		Doc-Key / ECM-Nr.		100544207/UGD/044/G		500000247856	
Type TB		Number 09486868001XXX		Rev. G		Page 1/1			
HARTING Customised Solutions		D-32339 Espelkamp							