




Anwendung Application	Anordnung Arrangement	Leiter 1 Conductor 1	Leiter 2 Conductor 2	Anzugsdrehmoment Tightening torque	Blitzstromklasse Lightning current class
oberirdisch above ground	Parallel	Flach/Flat 30x3 mm, Cu	Flach/Flat 30x3 mm, Cu	M8, 15 Nm M10, 20 Nm	N (50 kA)




DIN EN 62561-1

- 416 003 L: 350 mm
- 416 005 L: 550 mm
- 416 006 L: 650 mm
- 416 010 L: 1050 mm
- 416 015 L: 1550 mm
- 416 020 L: 2050 mm
- 416 025 L: 2550 mm
- 416 030 L: 3050 mm
- 416 035 L: 3550 mm
- 416 040 L: 4050 mm
- 416 050 L: 5050 mm
- 416 060 L: 6050 mm
- 416 070 L: 7050 mm

- 416 080 L: 8050 mm
- 416 100 L: 10050 mm
- 416 120 L: 12050 mm
- 416 140 L: 14050 mm
- 416 150 L: 15050 mm
- 416 200 L: 20050 mm
- 416 220 L: 22050 mm
- 416 280 L: 28050 mm
- 416 300 L: 30030 mm

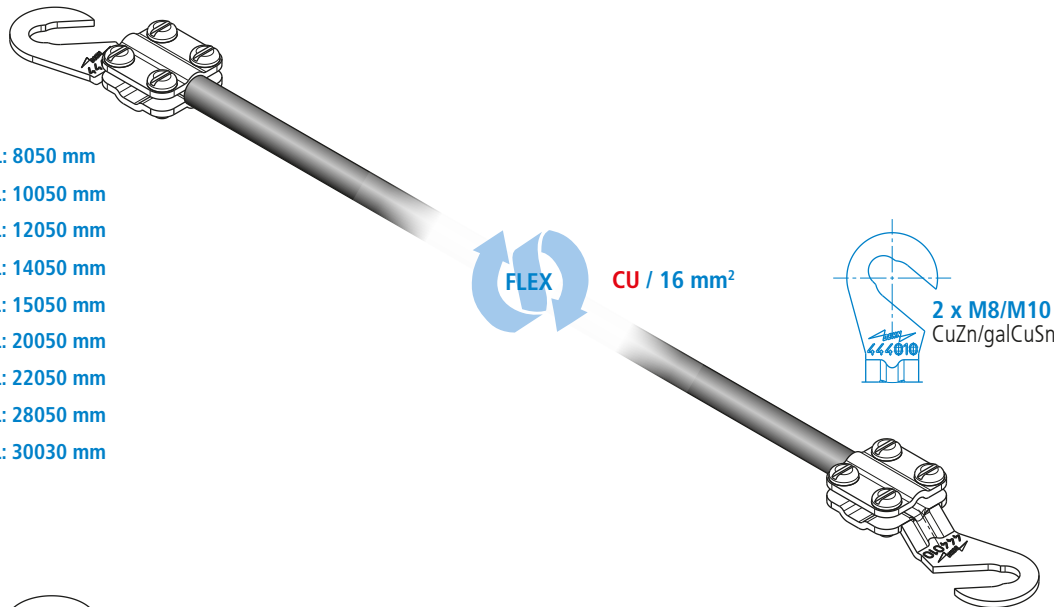

- 416 903 L: 350 mm
- 416 905 L: 550 mm
- 416 906 L: 650 mm
- 416 910 L: 1050 mm
- 416 915 L: 1550 mm
- 416 920 L: 2050 mm
- 416 925 L: 2550 mm
- 416 930 L: 3050 mm
- 416 970 L: 7050 mm

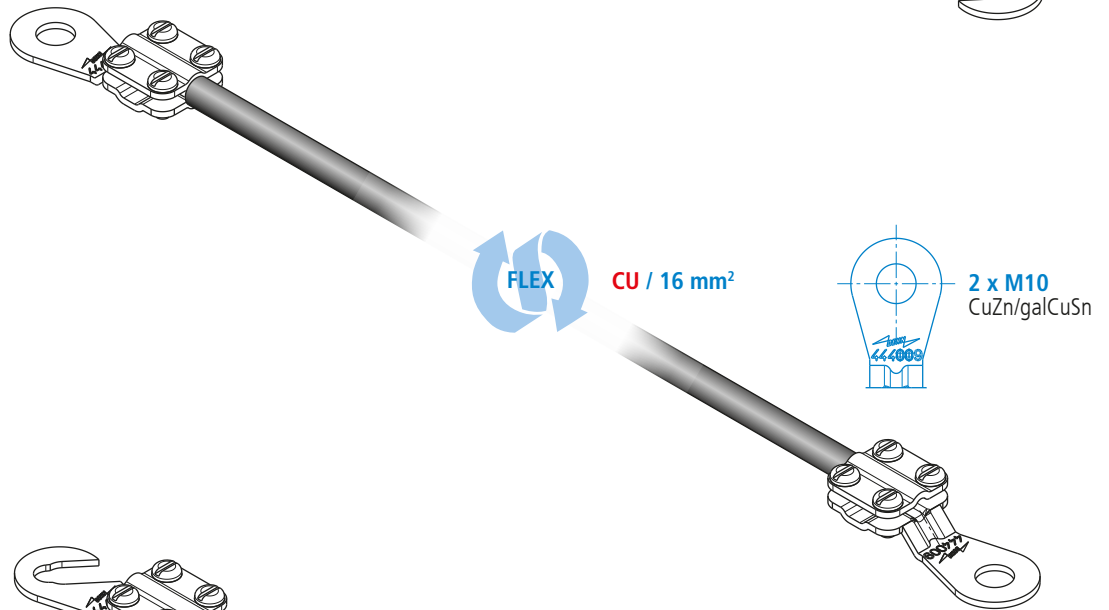

- 416 403 L: 350 mm
- 416 410 L: 1050 mm
- 416 416 L: 1550 mm
- 416 426 L: 2550 mm
- 416 431 L: 3050 mm
- 416 441 L: 4050 mm
- 416 451 L: 5050 mm
- 416 421 L: 2050 mm

