



ORYO-T 101.930.25/DALI-ST

Oryo 100 | Track-Mounted (1xLED 20W 930/3000K 1730lm 25°)

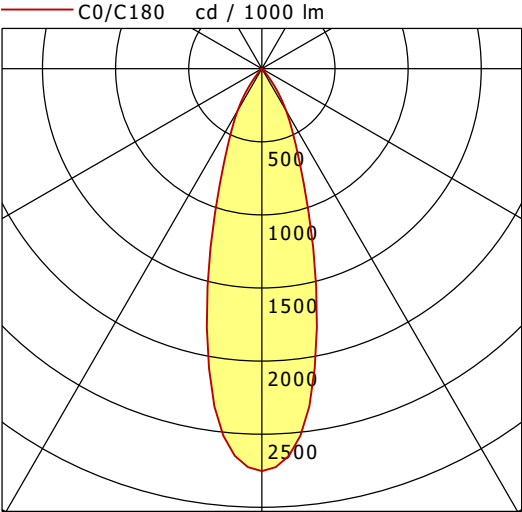

	C0	C90	C180	C270
0°	2753	2753	2753	2753
15°	1403	1403	1403	1403
30°	332	332	332	332
45°	17	17	17	17
60°	7	7	7	7
75°	2	2	2	2
90°	0	0	0	0
cd / 1000 lm				

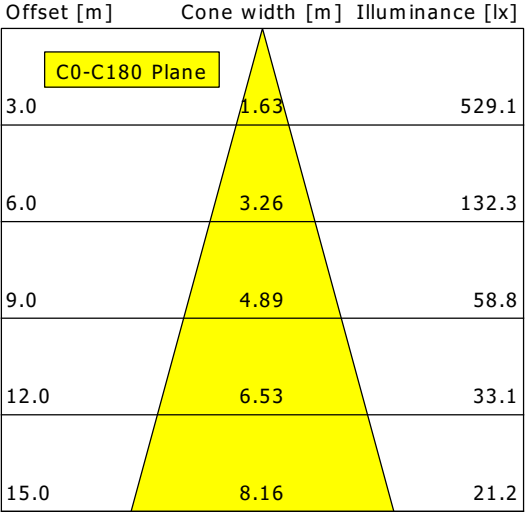

η		LED
Efficiency		87 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		20 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		19.2
UGR C90/C270		19.2
CIE Flux Codes	97 99 100 100 100	
Ra/CRI		>90