



5

4

3

2


1

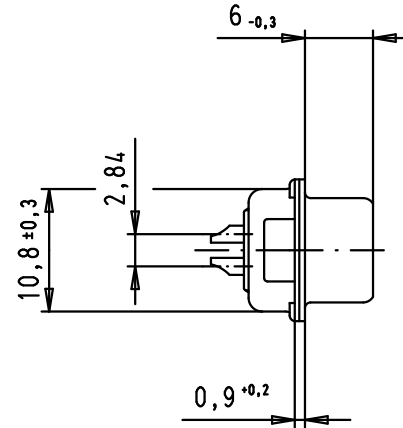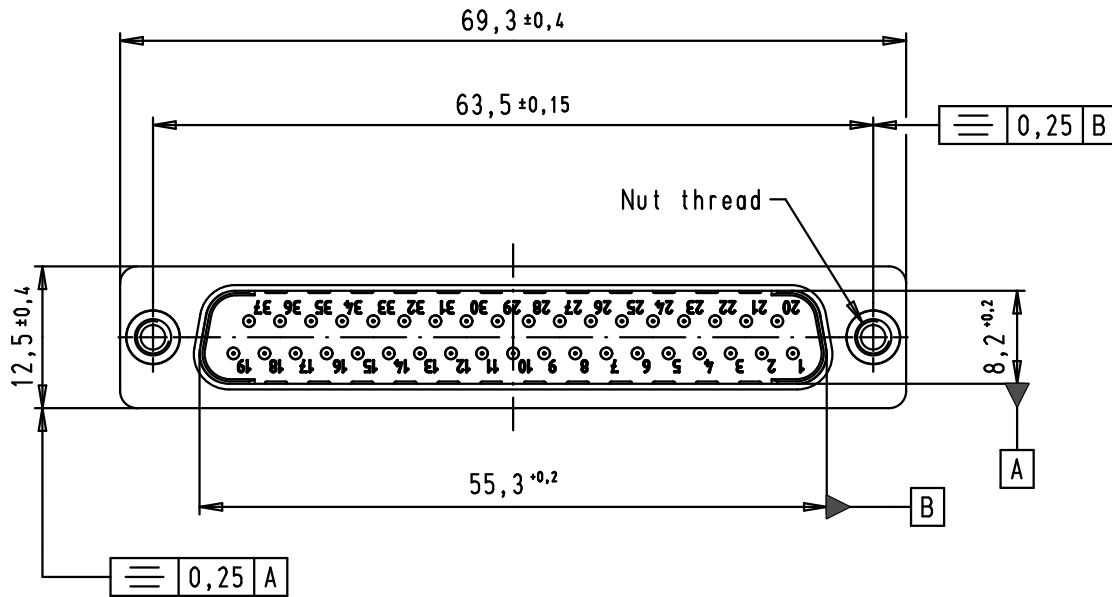

SPECIFICATIONS


Mating cycles	500
Filter type	C
Capacitance	47 pF±20%
Working voltage	100 V
Current rating	7,5 A
Insulation resistance	>1 GΩ

FREQUENCY (MHz)	ATTENUATION (dB)
5	-
10	-
50	-
100	-
500	30
1000	35

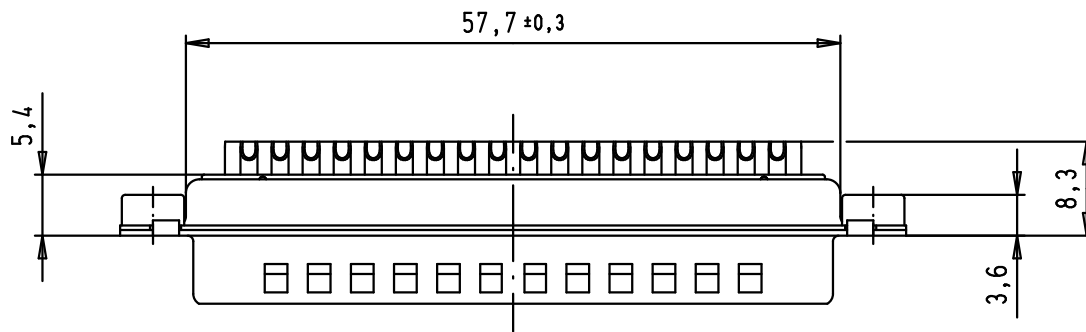

Solder buckets for AWG 20

Mod.	Dat.	Name	Detail.	Dat.	Name
				08/07/02	CV
			Insp.		
35300	01/12/08	PK	Stand.		
33800	21/08/06	PK			
31058	08/07/02	CV			
			HARTING EURL F-95972 Paris		



All Dim. in mm
Orig. Size DIN A 4

D-Sub, male, straight,
37 poles, turned solder
buckets and clinch nuts

Maßstab/
Scale
1,5:1

09 64 421 7218	M3
09 64 421 7217	4-40 UNC-2B
Part number	Nut thread

TB 09 64 421 721X
Sub.

Blatt/ Page
1 / 1

D

C

B

A