HARTING ®

Pushing Performance
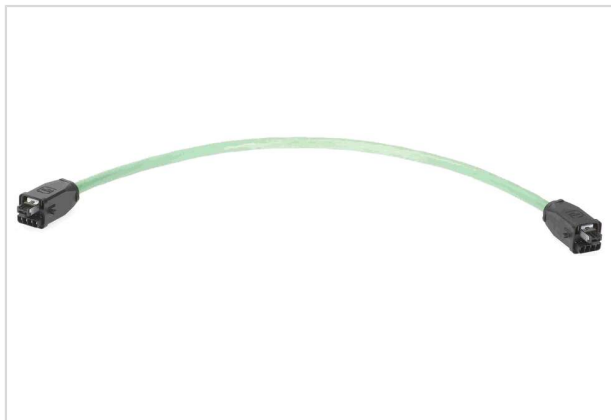Since 1945

RJI Han3A pla.Hyb. PN Cat5+4x1,5 20m

Part number	09 45 725 1353
Specification	RJI Han3A pla.Hyb. PN Cat5+4x1,5 20m
HARTING eCatalogue	https://harting.com/09457251353

Image is for illustration purposes only. Please refer to product description.

Identification

Category	System cabling
Series	RJ45
Element	Cable assemblies
Specification	Pre-assembled on both sides
Connector 1	Han$^®$ 3 A Hybrid Thermoplastic
Connector 2	Han$^®$ 3 A Hybrid Thermoplastic
Type of cable	Copper cable (round)

Version

Cable length	20 m
Number of cores	8
Core structure	4x AWG 22/7 4x 1.5 mm²

Technical characteristics

Transmission characteristics	Cat. 5 Class D up to 100 MHz
Data rate	10 Mbit/s 100 Mbit/s
Limiting temperature	-20 ... +70 °C

Material properties

Material (cable)	FRNC (LSZH)

Page 1 / 2 | Creation date 2025-04-21 | Please note that the data specified here were taken as extracts from the online catalogue. Please refer to the user documentation for the complete and up-to-date information and data. Please also note that the user is responsible for validating functionality, conformity with applicable laws and directives, as well as for the electrical safety in the particular application.
HARTING Customised Solutions GmbH & Co. KG | In der Tütenbeke 22 | 32339 Espelkamp | Germany
Phone +49 5772 47-0 | info@HARTING.com | www.HARTING.com

Material properties

Colour (cable)	Green
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Not contained
California Proposition 65 substances	Not contained

Specifications and approvals

PROFINET	Yes

Commercial data

Packaging size	1
Net weight	3,166 g
Country of origin	Romania
European customs tariff number	85444290
GTIN	5713140063129
eCl@ss	27060390 Ready-made data cable (unspecified)
ETIM	EC002599
UNSPSC 24.0	26121600

Page 2 / 2 | Creation date 2025-04-21 | Please note that the data specified here were taken as extracts from the online catalogue. Please refer to the user documentation for the complete and up-to-date information and data. Please also note that the user is responsible for validating functionality, conformity with applicable laws and directives, as well as for the electrical safety in the particular application.
HARTING Customised Solutions GmbH & Co. KG | In der Tütenbeke 22 | 32339 Espelkamp | Germany
Phone +49 5772 47-0 | info@HARTING.com | www.HARTING.com