
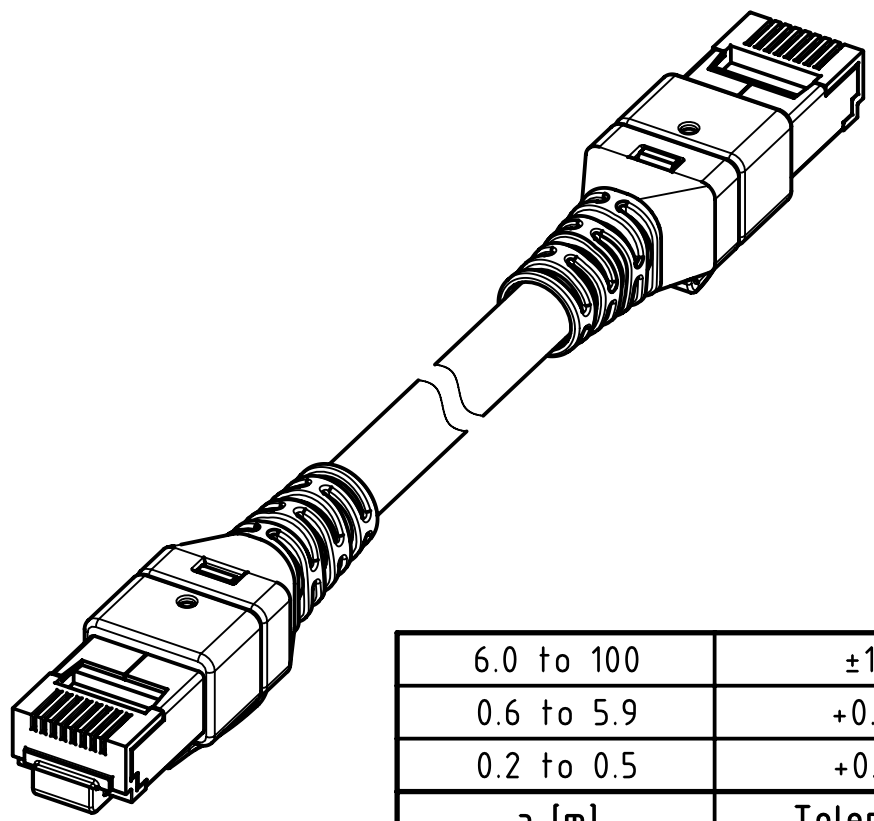
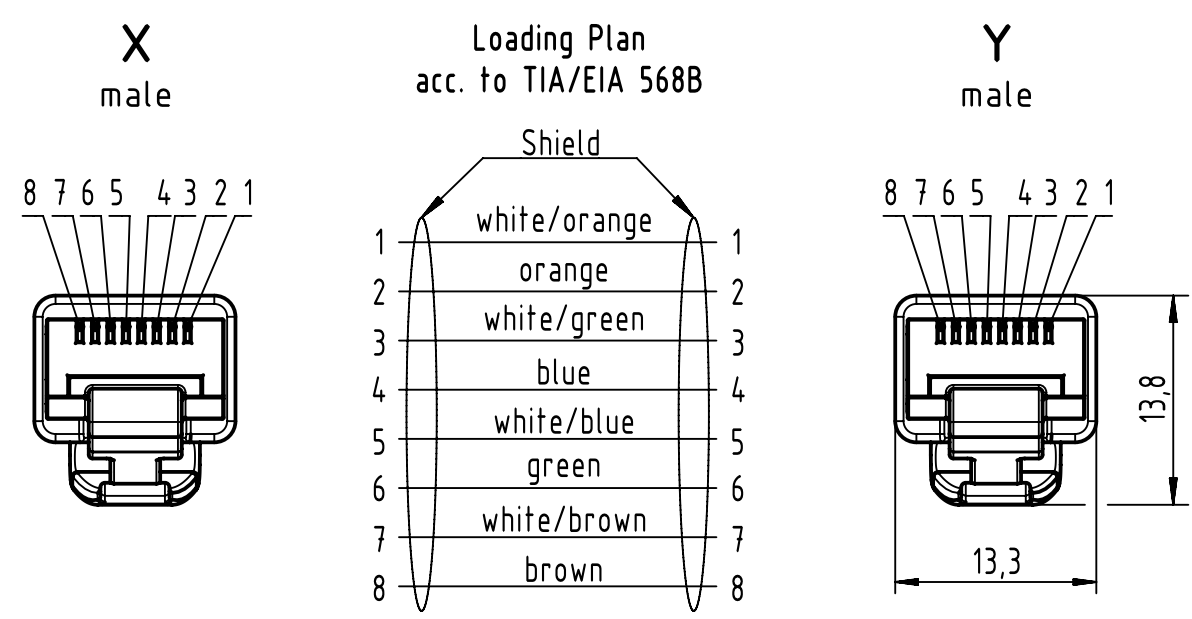


Connector Location A

Connector Location B

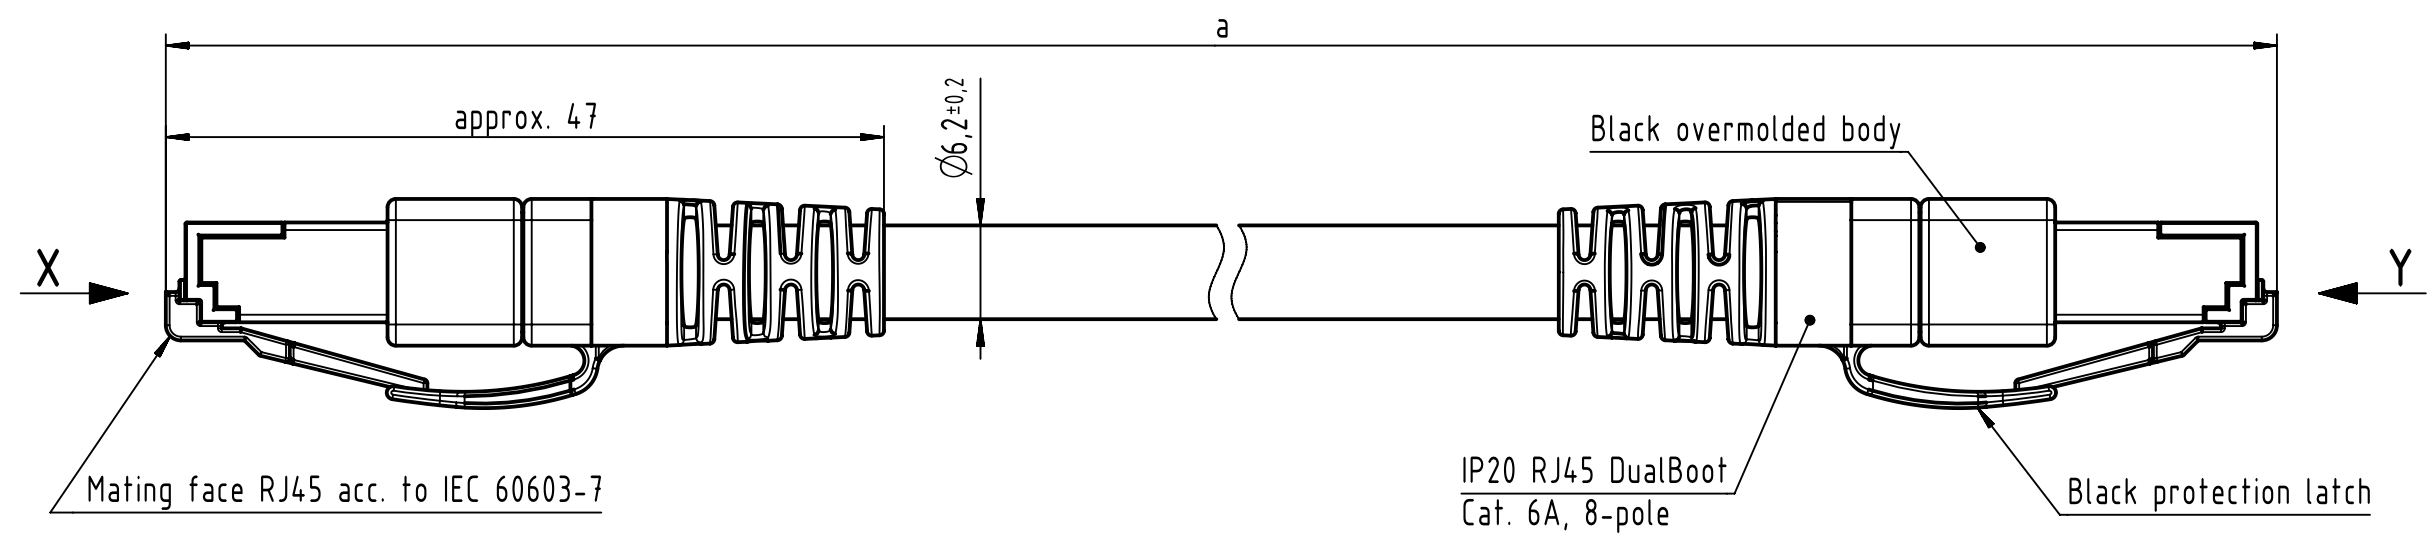

6.0 to 100	±1%
0.6 to 5.9	+0.04
0.2 to 0.5	+0.02
a [m]	Tolerance

length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	12	XXX=120
length in "0.1m" step	11	XXX=110
	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
Step	.	.
	0.5	XXX=005
	0.4	XXX=004
	0.3	XXX=003
a [m]	0.2	XXX=002
	XXX	XXX

Temperature range:
- Fixed installation: -20°C ... +60°C
- Dynamic installation: 0°C ... +50°C

NOTE:
* For lengths < 1.0m:
- relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30°
* For lengths ≥ 1.0m:
- relative positioning of the connectors to each other not obligatory
* Cat.6A 10 Gbit/s Ethernet transmission possible for lengths up to 45m

Cat. 7 FRNC Ethernet Cable, AWG 26/7, S/FTP, black	09488787590XXX
Type of cable	Part no.

All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	
	All rights reserved	Created by COSTEA	Inspected by 402676 Gross	Standardisation MUNTEANV Muntean	Date 2021-10-28	State Final Release	
	Department HCS - RO	Title DualBoot RJ45 FRNC Cat.6A black		Doc-Key / ECM-Nr. 100739572/UGD/007/D 500000204213		Rev. D	Page 1/1
HARTING Customised Solutions D-32339 Espelkamp		Type TB	Number 09488787590XXX				