


LK-L 060.10830.1405.1/DALI


Lichtkanal 060 | Light-Insert (Batwing/Wide Beam nanoOptix, 1xLED 21W 830/3000K 3260lm)

— C0/C180 cd / 1000 lm - - - C90/C270

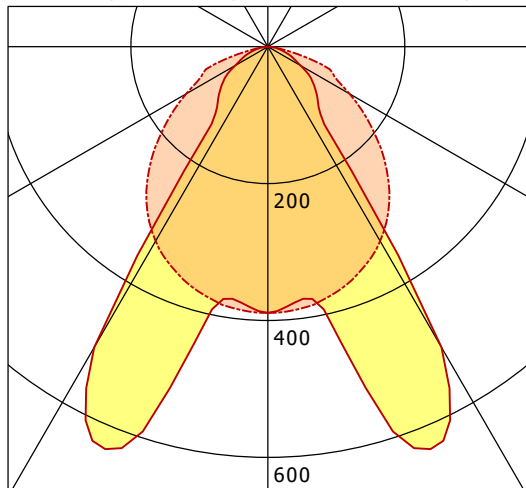

| | C0 | C90 | C180 | C270 |
|--------------|-----|-----|------|------|
| 0° | 389 | 389 | 389 | 389 |
| 15° | 482 | 373 | 482 | 373 |
| 30° | 507 | 328 | 507 | 328 |
| 45° | 102 | 243 | 102 | 243 |
| 60° | 55 | 138 | 55 | 138 |
| 75° | 21 | 53 | 21 | 53 |
| 90° | 0 | 0 | 0 | 0 |
| cd / 1000 lm | | | | |

Offset [m] Cone width [m] Illuminance [lx]

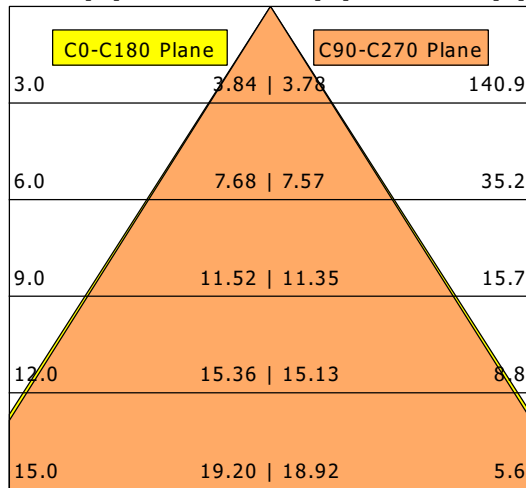

| | |
|--------------------|------------------|
| η | LED |
| Efficiency | 155 lm/W |
| Direct/Indirect | ↓ 100% / ↑ 0% |
| System Power | 21 W |
| UGR | X=4H, Y=8H |
| Reflection factors | 70/50/20 |
| UGR C0/C180 | 19.1 |
| UGR C90/C270 | 25.4 |
| CIE Flux Codes | 64 90 98 100 100 |
| Ra/CRI | >80 |