

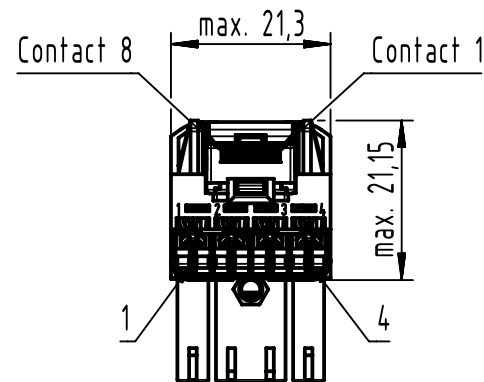
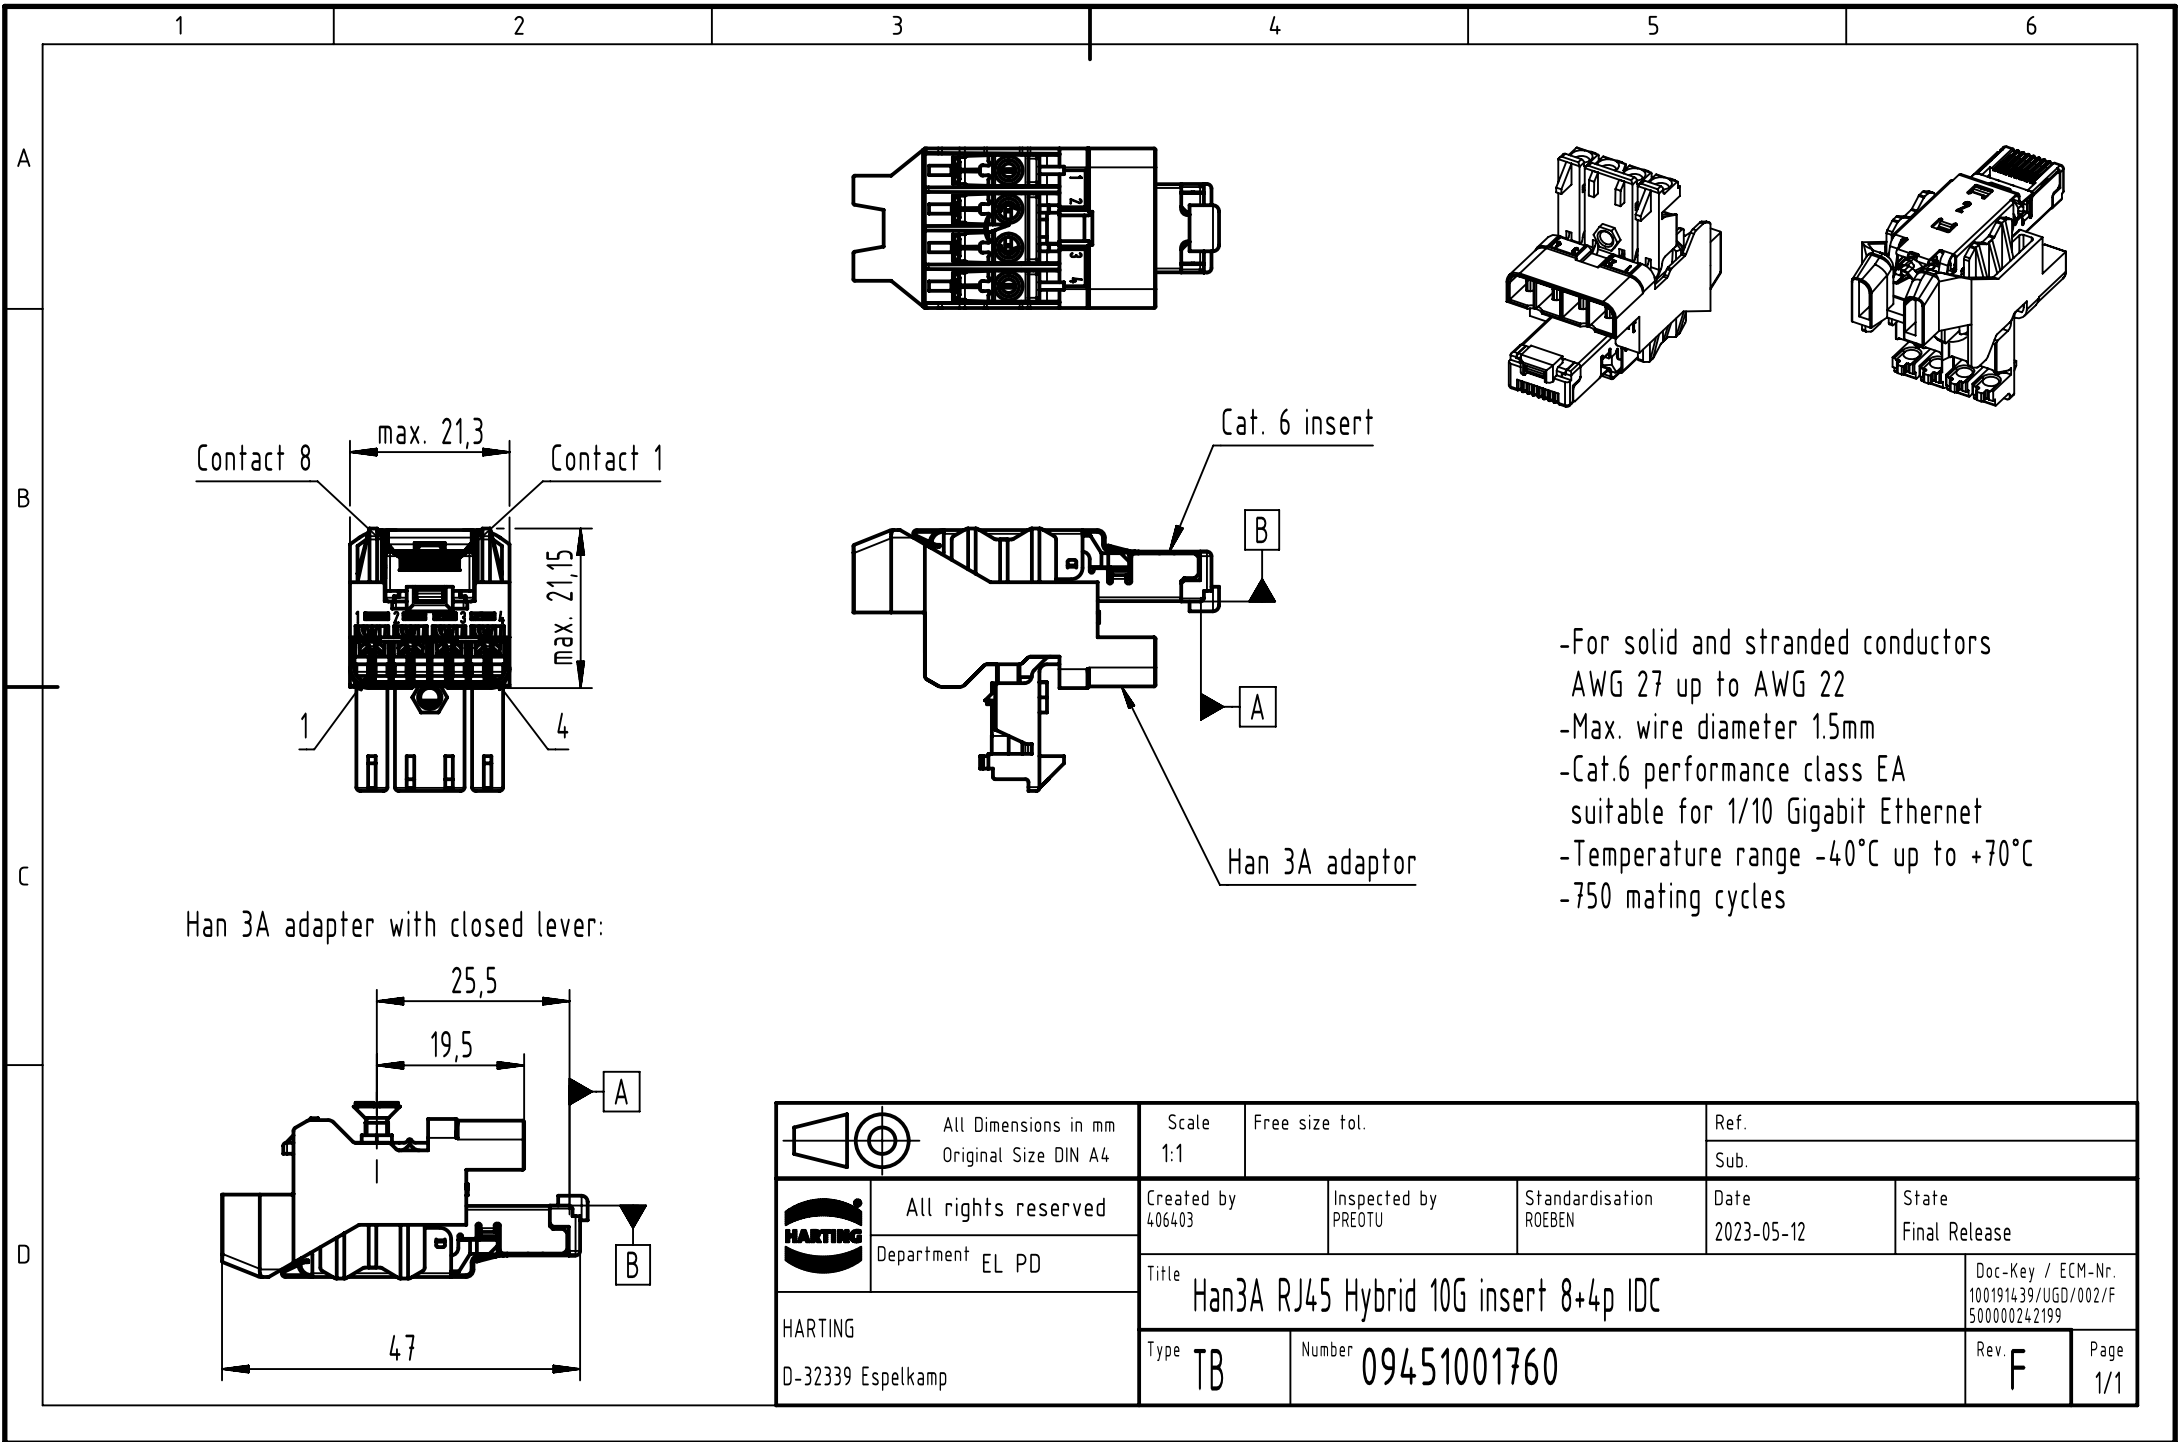


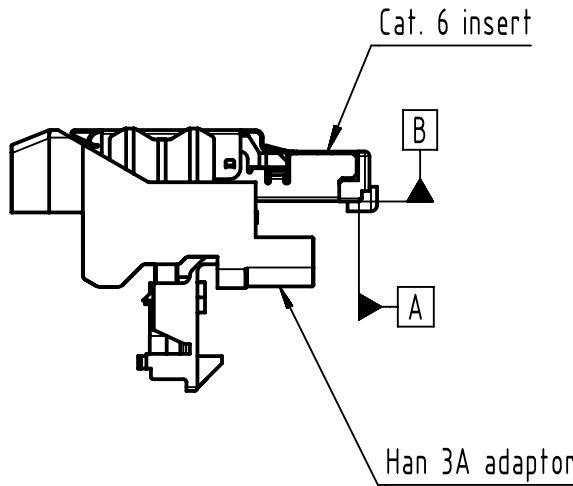


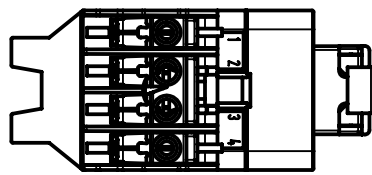

Han 3A adapter with closed lever:

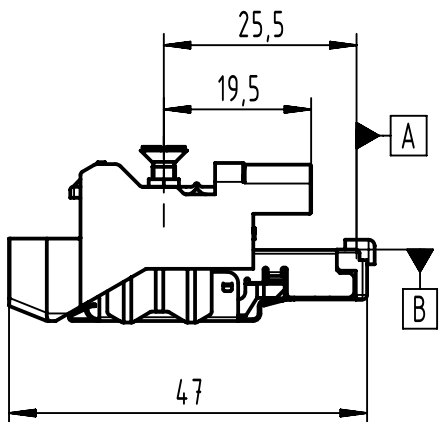

- For solid and stranded conductors  
AWG 27 up to AWG 22
- Max. wire diameter 1.5mm
- Cat.6 performance class EA  
suitable for 1/10 Gigabit Ethernet
- Temperature range -40°C up to +70°C
- 750 mating cycles

|                                                                                                                                                                         |  |                                              |  |  |                                                |  |                        |  |                           |  |                    |  |                                                          |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|----------------------------------------------|--|--|------------------------------------------------|--|------------------------|--|---------------------------|--|--------------------|--|----------------------------------------------------------|--|
|   |  | All Dimensions in mm<br>Original Size DIN A4 |  |  | Scale<br>1:1                                   |  | Free size tol.         |  | Ref.                      |  |                    |  |                                                          |  |
|                                                                                                                                                                         |  |                                              |  |  |                                                |  |                        |  | Sub.                      |  |                    |  |                                                          |  |
|                                                                                      |  | All rights reserved                          |  |  | Created by<br>406403                           |  | Inspected by<br>PREOTU |  | Standardisation<br>ROEBEN |  | Date<br>2023-05-12 |  | State<br>Final Release                                   |  |
|                                                                                                                                                                         |  | Department EL PD                             |  |  | Title<br>Han3A RJ45 Hybrid 10G insert 8+4p IDC |  |                        |  |                           |  |                    |  | Doc-Key / ECM-Nr.<br>100191439/UGD/002/F<br>500000242199 |  |
|                                                                                                                                                                         |  | HARTING<br>D-32339 Espelkamp                 |  |  |                                                |  |                        |  |                           |  |                    |  | Type<br>TB                                               |  |