



ORYO-P 203.940.45/DALI-ST

Oryo 200 | Pendant (1xLED 30W 940/4000K 3520lm 45°)

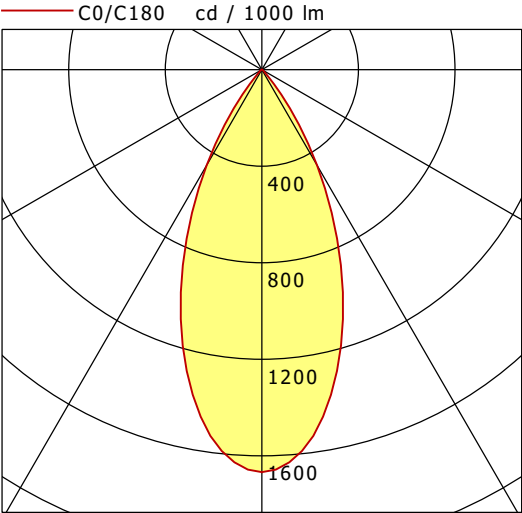

	C0	C90	C180	C270
0°	1668	1668	1668	1668
15°	1239	1239	1239	1239
30°	457	457	457	457
45°	21	21	21	21
60°	6	6	6	6
75°	2	2	2	2
90°	0	0	0	0
cd / 1000 lm				

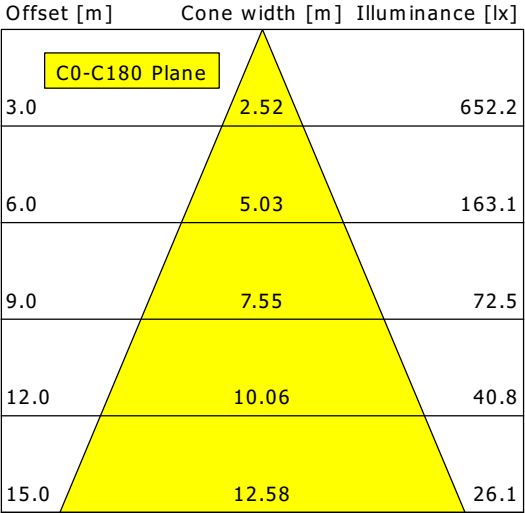

η		LED
Efficiency		117 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		30 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		21.5
UGR C90/C270		21.5
CIE Flux Codes	97 99 100 100 100	
Ra/CRI		>90