


SKIS-A 101.830.1/DALI


Skive Small | Anbau (1xLED 18W 830/3000K 1350lm)

— C0/C180 cd / 1000 lm - - - C90/C270

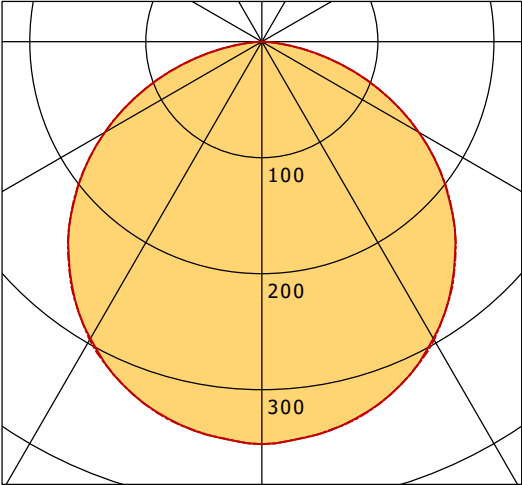

	C0	C90	C180	C270
0°	347	347	347	347
15°	333	334	333	334
30°	296	297	296	297
45°	236	236	236	236
60°	156	156	156	156
75°	65	65	65	65
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

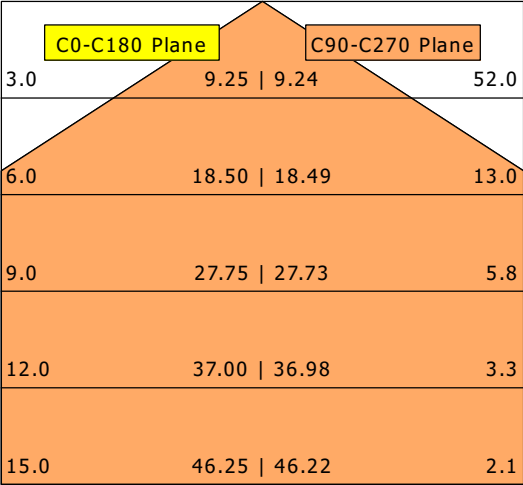

η	LED
Efficiency	75 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	18 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	23.0
UGR C90/C270	23.0
CIE Flux Codes	47 79 96 100 100
Ra/CRI	> 80