

#### Produkteigenschaften

Form	rund
Breite	mit Putzlaschen 105 mm
Tiefe	46 mm
Bohrlochgröße	82 mm
Einbauöffnung	60 mm
Farbe	blau / orange
Gesamtanzahl der Einführungen	2 x M20 4 x M25
Einführungen von hinten	Kabel 2 x M12
Zugentlastet	Nein
Anreihbar	Ja
Schraubdome	4
Aufnahme Deckenhaken	Nein
Schallschutz	in Kombination mit Thermoschaum (P717) bis 64 dB
Luftdicht	Ja
Wärmebrückenfrei	Ja, nur in Kombination mit Thermoschaum (P717)
Leistungsübergang	Vollisoliert


#### Thermodose THD-45 - Die luftdichte Unterputzdose für sekundenschnelles Einschäumen - bye bye Gips!

- » Schnellmontage mit Thermoschaum
- » Wärmebrückenfreie Installation nach DIN 18015-5
- » Werkzeuglose Rohreinführung M20/M25
- » Absolut luftdicht
- » Schallschutz bis 64 dB
- » Membranrastzähne gleichen unebene Bohrlöcher aus
- » Integrierter Putzanschlag = putzbündige Installation
- » SCS-Verbindungstechnik = feste Verbindung und einfache Durchverdrahtung

Serie	-
Artikelnummer	P774
Kategorie	Unterputzinstallation
Montageart	Schaum
Einsatz	Unterputz
EAN	4260182065020

#### Materialeigenschaften

Material Gehäuse	PP
Material Einführung	TPE

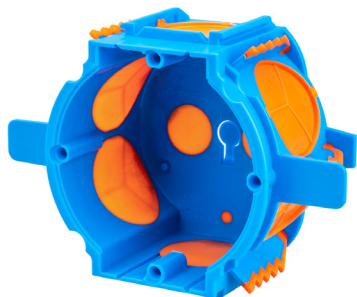

**Thermo box THD-70 - The airtight flush-mounted box for foaming in seconds - bye bye plaster!**

- » Quick installation with thermo foam
- » Installation without thermal bridges according to DIN 18015-5
- » Toolless conduit entry M20/M25
- » Absolutely airtight
- » Sound insulation up to 64 dB
- » Membrane ratchet teeth compensate for uneven drill holes
- » Integrated plaster stop = flush plaster installation
- » SCS connection technology = fixed connection and simple through-wiring

Series	-
Article No.	P774
Category	Flush mounting installation
Type of installation	Foam
Use	Flush mounting
EAN	4260182065020

<b>Material properties</b>	
Material box	PP
Material insertion	TPE

**Product features**

Shape	round
Wide	with plaster lugs 105 mm
Depth	46 mm
Hole size	82 mm
Installation opening	60 mm
Color	blue / orange
Total number of entries for conduit and cable	2 x M20 4 x M25
Entries from behind	Cable 2 x M12
Strain relief	No
Bayable	Yes
Screw domes	4
Ceiling hook	No
Sound insulation	in combination with thermo foam (P717) up to 64 dB
Airtight	Yes
Thermal bridge-free	Yes, only in combination with thermo foam (P717)
Line transition	Fully insulated