

## Wall mounting appliance inlet - housing dimensions 80x70

| Product description       |                                                                                |
|---------------------------|--------------------------------------------------------------------------------|
| BALS-Prd.-Nr              | 469                                                                            |
| EAN                       | 4024941004695                                                                  |
| Product category          | Wall mounting appliance inlet, extra-low voltage                               |
| Current                   | 16A                                                                            |
| Number of poles           | 3p                                                                             |
| Poles                     | 3P                                                                             |
| Position of earth contact | 2 h                                                                            |
| Voltage                   | 20 up to 25 and 40 up to 50V                                                   |
| Frequency                 | 300Hz                                                                          |
| Protection degree         | IP44                                                                           |
| Colour code               | green RAL 6002                                                                 |
| Colour of appliance       | Housing bottom grey RAL 7035, Housing top grey RAL 7035, Collar green RAL 6002 |
| Connection design         | with screw terminal                                                            |
| Maximum conductor size    | 10,0 qmm                                                                       |
| Cable entry               | top entry M25                                                                  |
| Height                    | 102mm                                                                          |
| Width                     | 70mm                                                                           |
| Depth                     | 63mm                                                                           |


| Product description    |                                                                  |
|------------------------|------------------------------------------------------------------|
| Dimension of enclosure | 80x70 mm (HxW)                                                   |
| Material of enclosure  | Polyamide                                                        |
| Contact                | The contact carrier is made of polyamide, The contacts are brass |

| Additional technical properties |                                    |
|---------------------------------|------------------------------------|
|                                 | The cable entry is one at top open |

| Logistics data |                  |
|----------------|------------------|
| Weight/pcs     | 0.155 kg / Piece |
| Packaging      | Bag              |
| Content amount | 1 ST             |
| EAN            | 4024941004695    |
| Length         | 63 mm            |
| Width          | 70 mm            |
| Height         | 102 mm           |
| Weight         | 0.156 kg         |
| Volume         | 449.82 ccm       |
| Packaging      | Carton           |
| Content amount | 10 ST            |
| EAN            | 4024941837330    |
| Length         | 245 mm           |

**Logistics data**

|        |           |
|--------|-----------|
| Width  | 177 mm    |
| Height | 185 mm    |
| Weight | 1.683 kg  |
| Volume | 7,140 ccm |

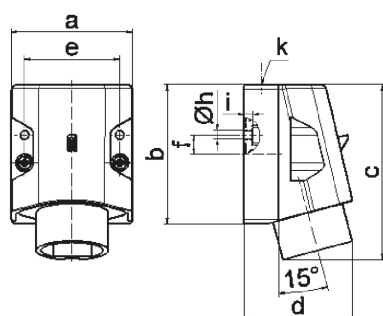

16 MB 15

| Ampere         | 16    | 16    | 32    | 32    |  |  |
|----------------|-------|-------|-------|-------|--|--|
| Polzahl        | 2     | 3     | 2     | 3     |  |  |
| a              | 70,0  | 70,0  | 70,0  | 70,0  |  |  |
| b              | 80,0  | 80,0  | 80,0  | 80,0  |  |  |
| c              | 100,0 | 100,0 | 100,0 | 100,0 |  |  |
| d              | 82,0  | 82,0  | 82,0  | 82,0  |  |  |
| e              | 55,0  | 55,0  | 55,0  | 55,0  |  |  |
| f              | 11,0  | 11,0  | 11,0  | 11,0  |  |  |
| h ø            | 5,2   | 5,2   | 5,2   | 5,2   |  |  |
| i              | 5,0   | 5,0   | 5,0   | 5,0   |  |  |
| k              | M25   | M25   | M25   | M25   |  |  |
| Leiter mm² min | 4     | 4     | 4     | 4     |  |  |
| Leiter mm² max | 10    | 10    | 10    | 10    |  |  |
|                |       |       |       |       |  |  |
|                |       |       |       |       |  |  |