



VTRXS 12.0530.60

Vale-Tu Round XSmall (1xLED 12W 830/3000K 1050lm)

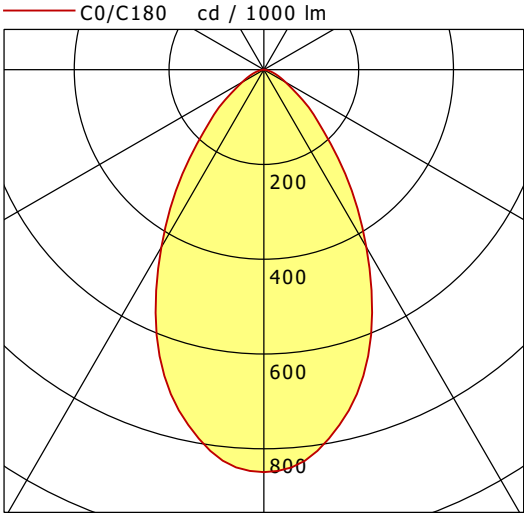

	C0	C90	C180	C270
0°	849	849	849	849
15°	727	727	727	727
30°	432	432	432	432
45°	171	171	171	171
60°	53	53	53	53
75°	15	15	15	15
90°	0	0	0	0
cd / 1000 lm				

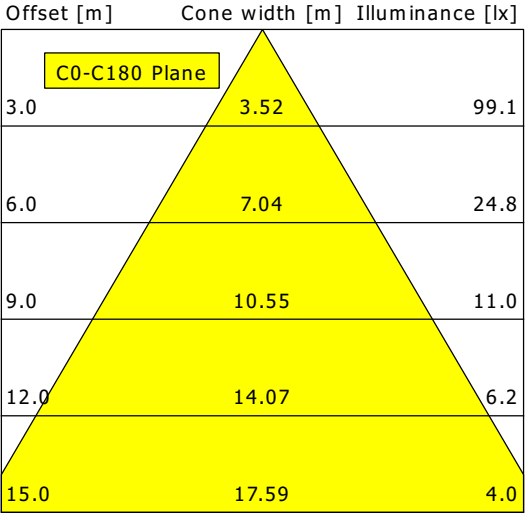

η		LED
Efficiency		88 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		12 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		28.9
UGR C90/C270		28.9
CIE Flux Codes		76 94 99 100 100
Ra/CRI		> 80