


Licross®

Ausspeiser IP40

Feed out IP40






59TL . FT .

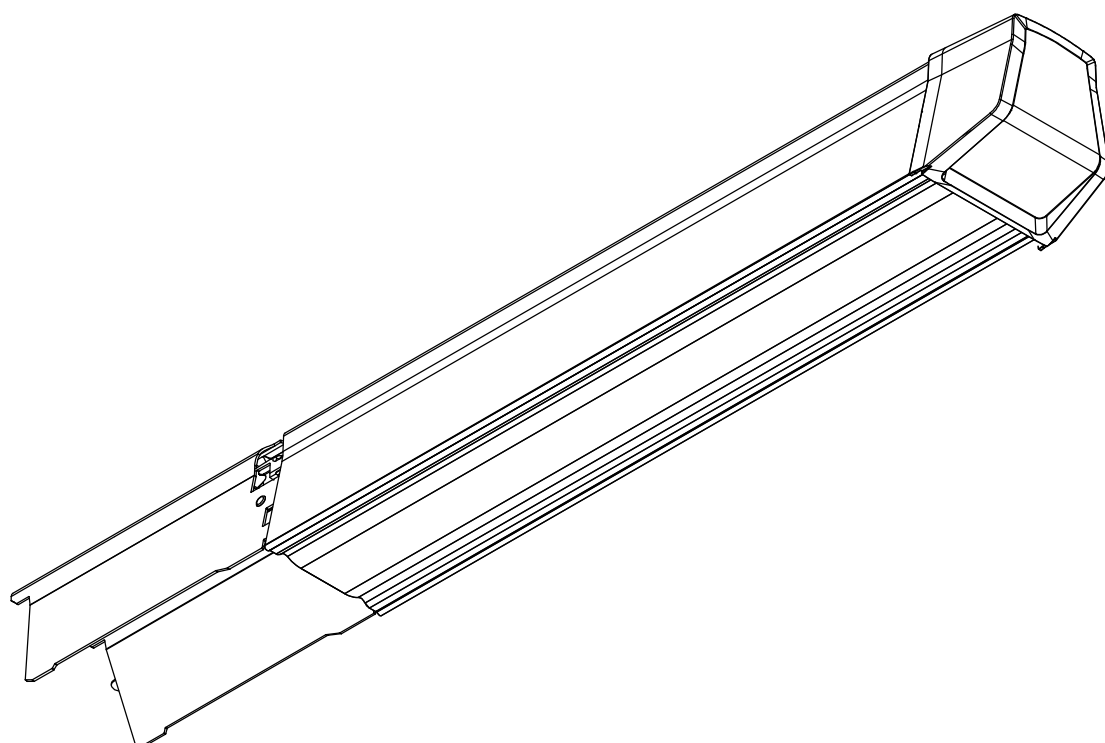

siteco




59TL . FT7

[mm]

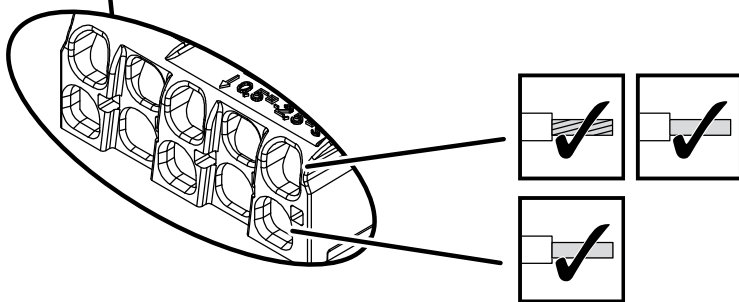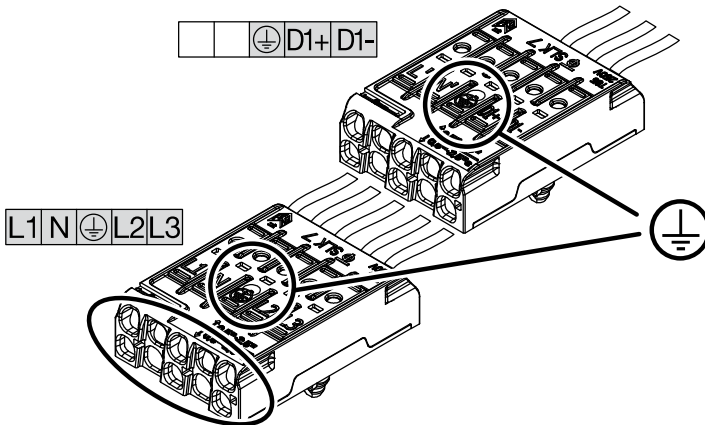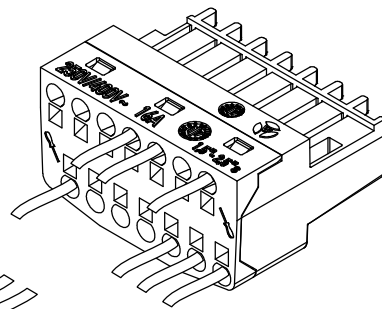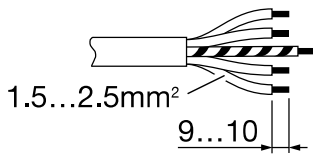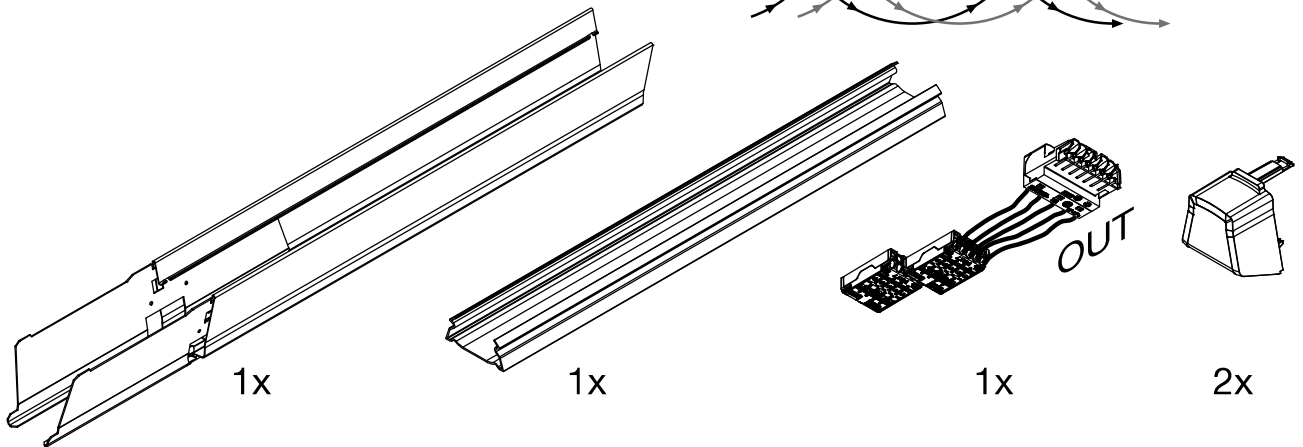


kg = 0.9

59TL . FTE

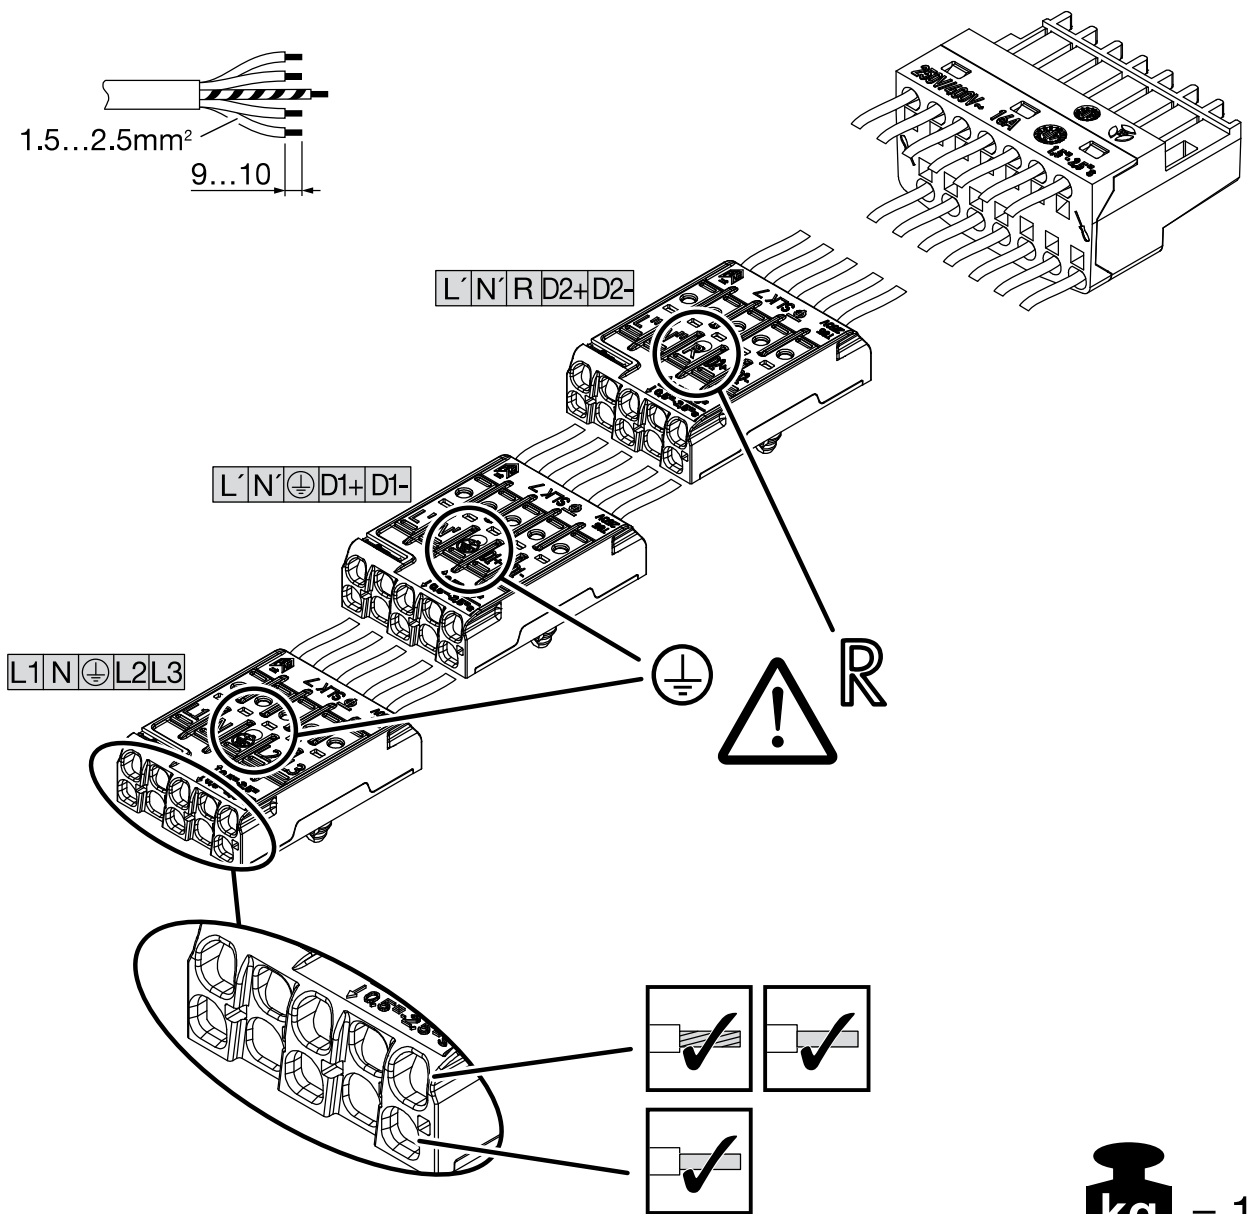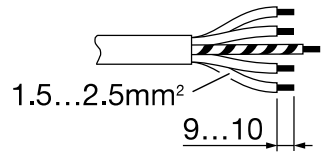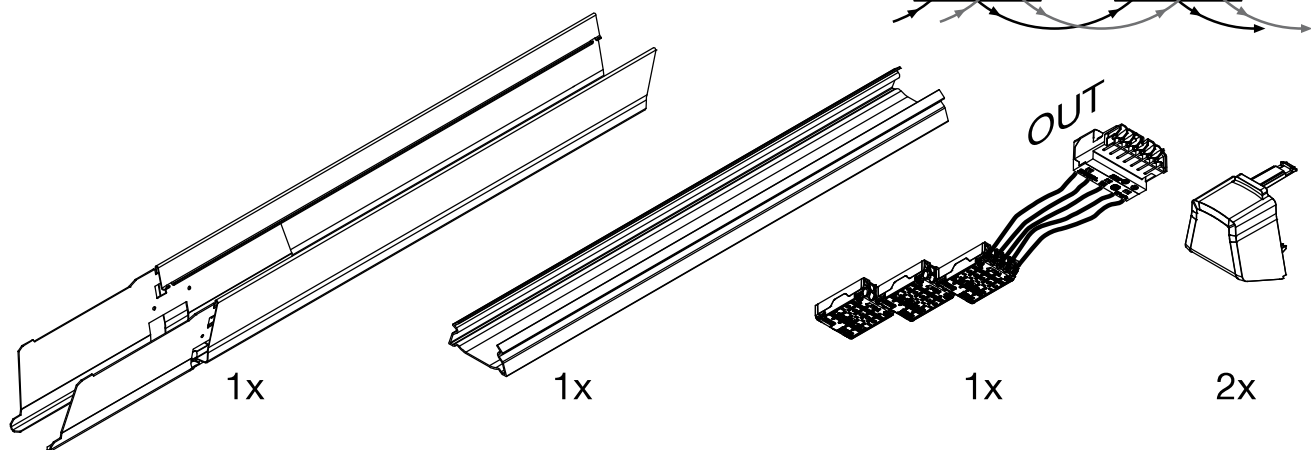


kg = 1.0


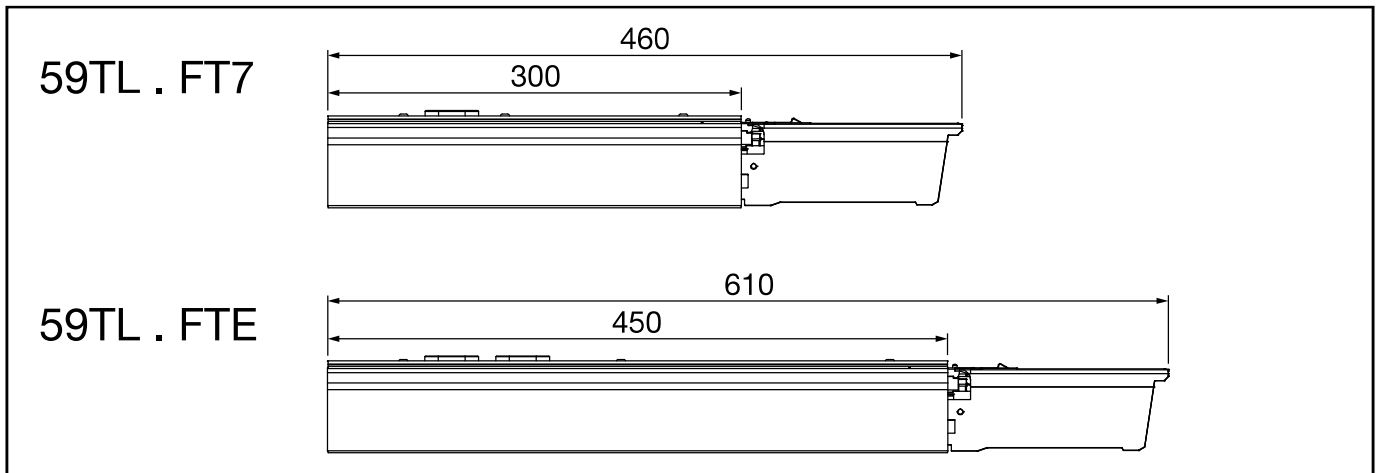



1 Umgebungstemperatur während der Installation: +5°C...+40°C
 Ambient temperature during installation:



IP40

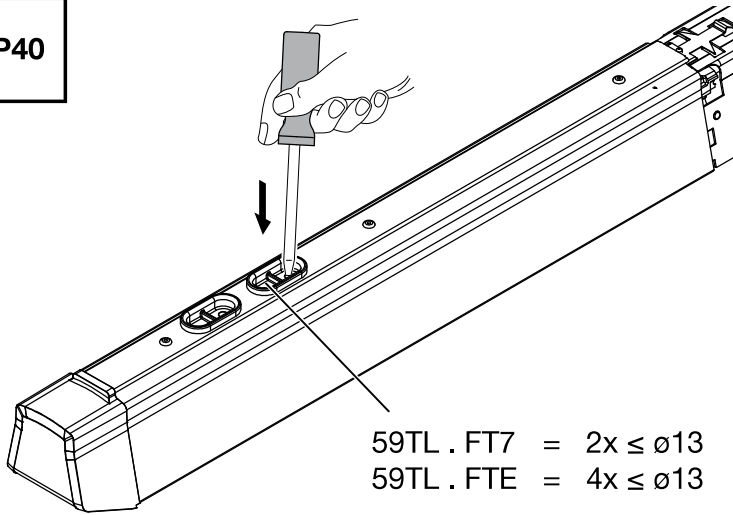



IP20

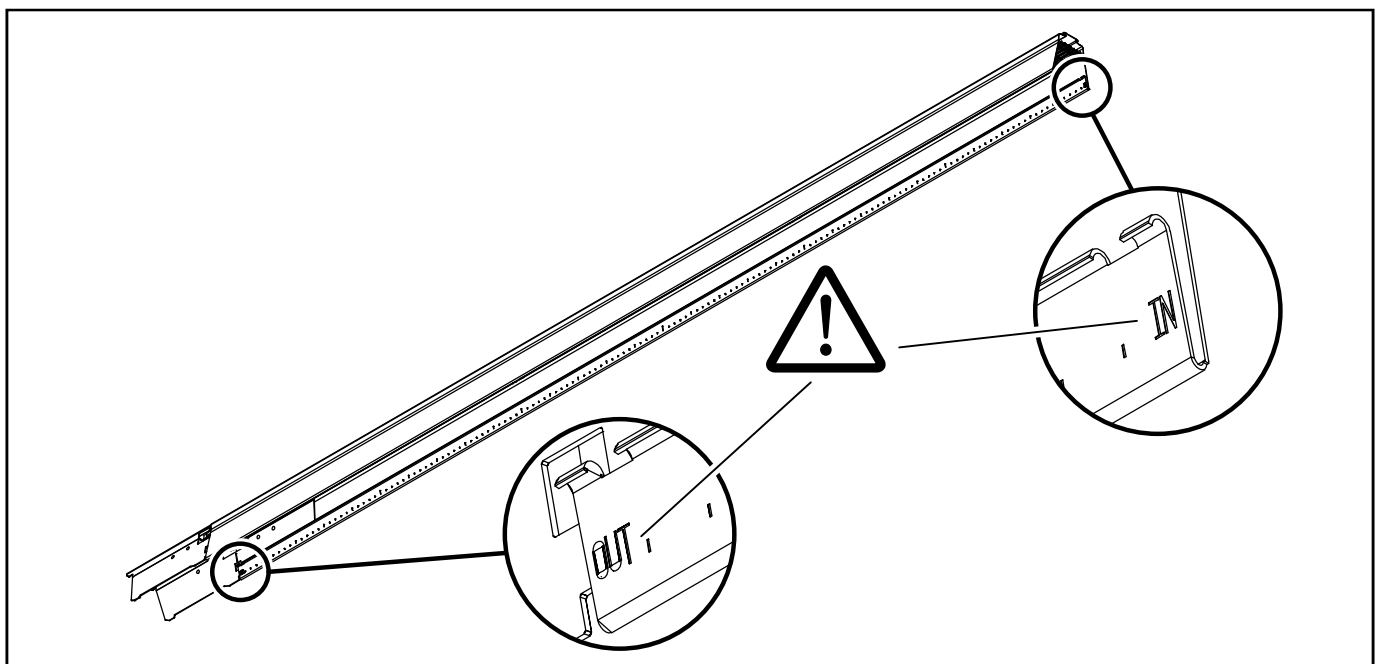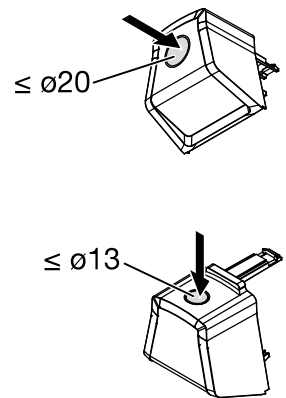

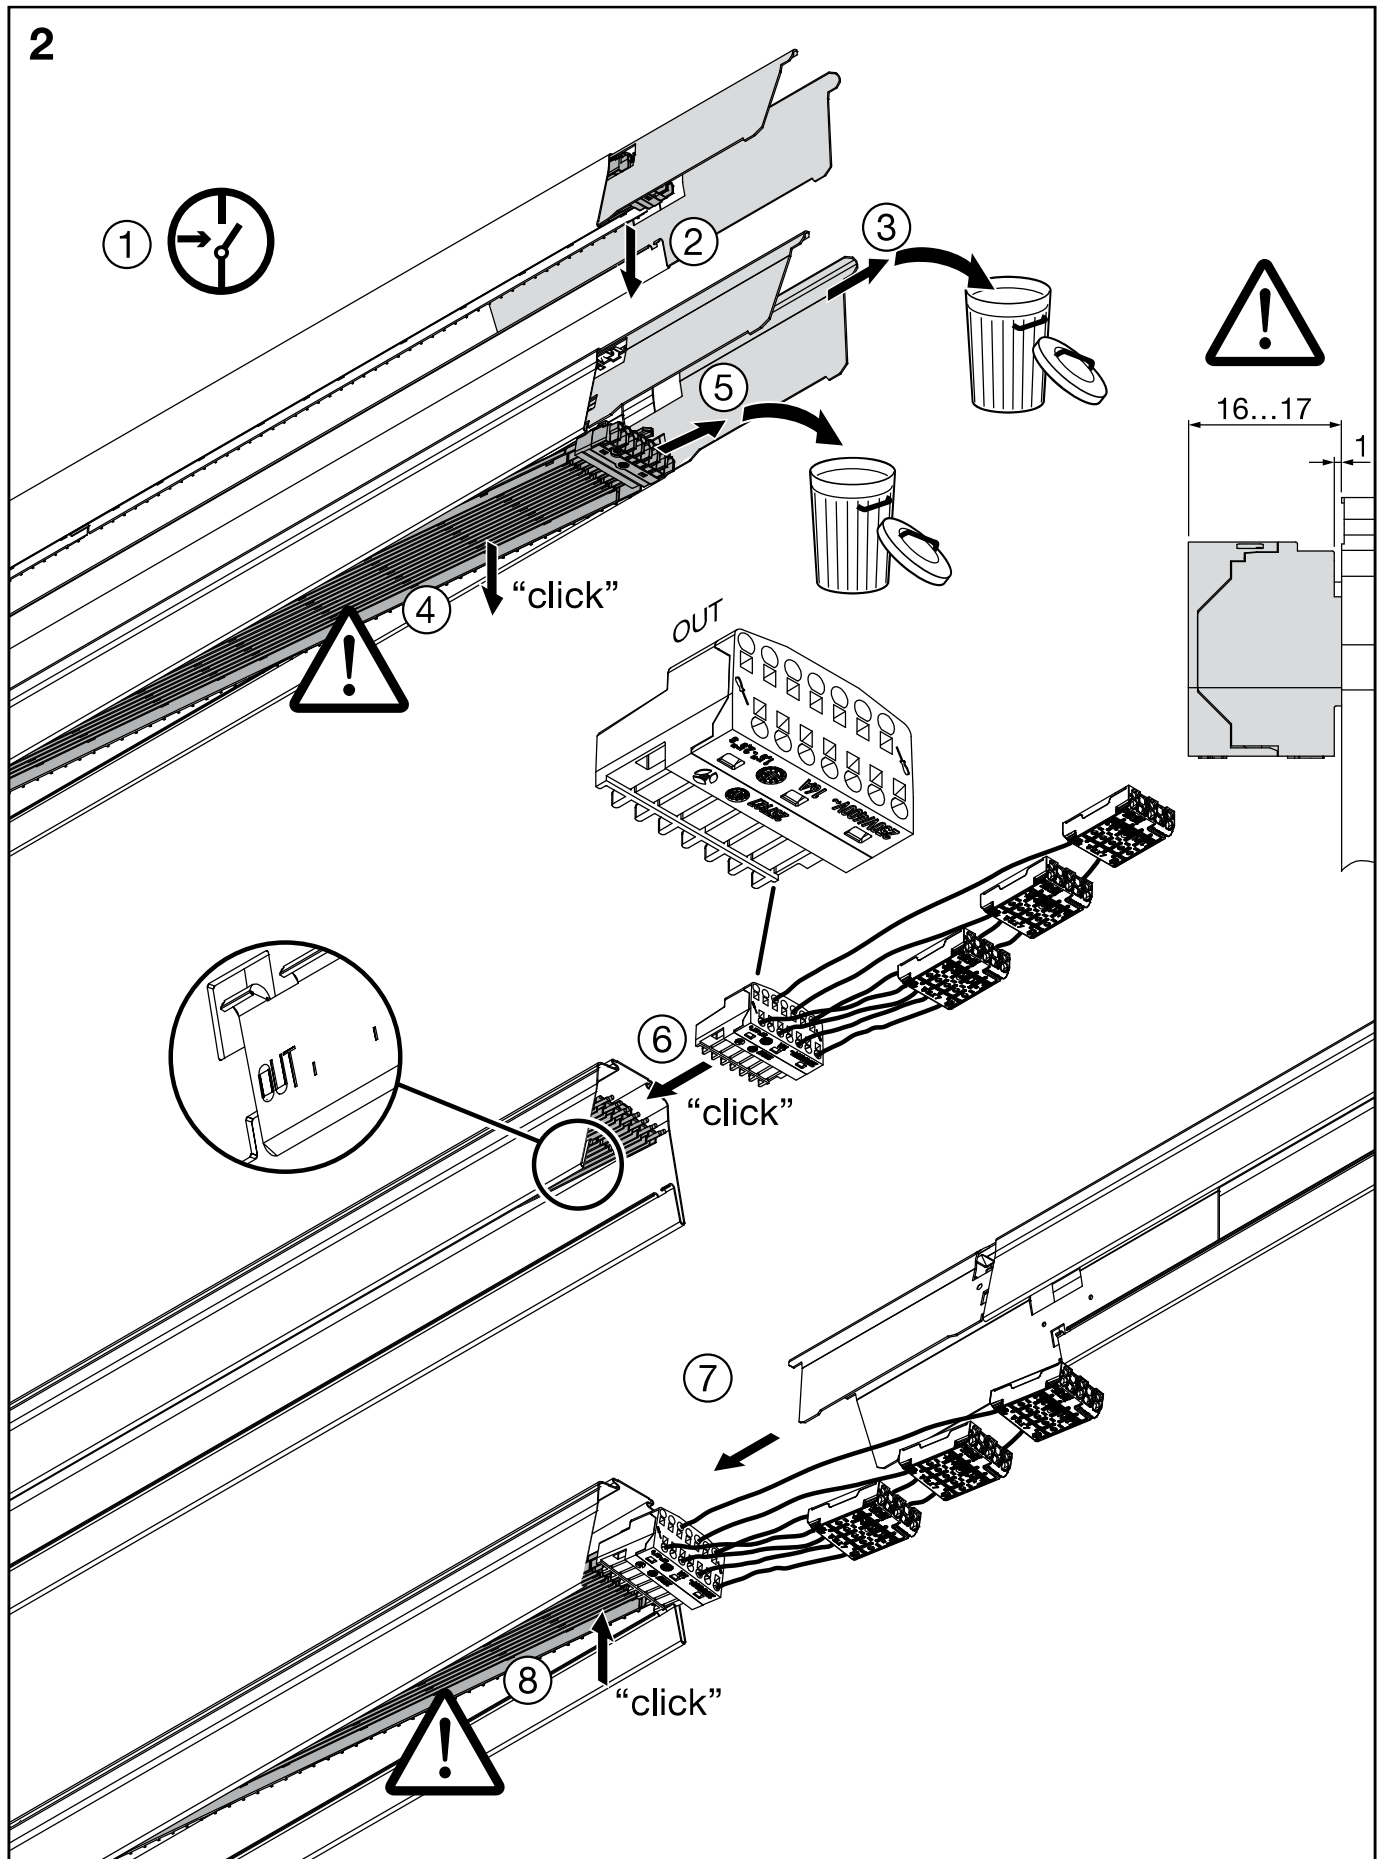

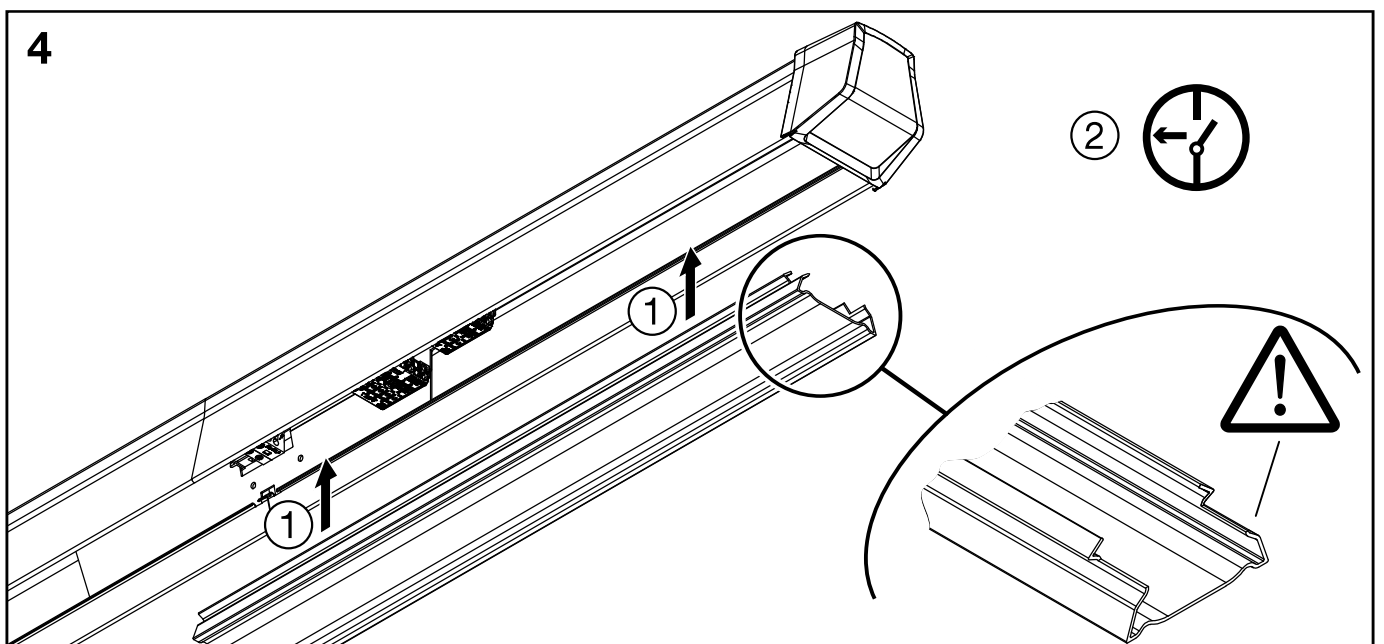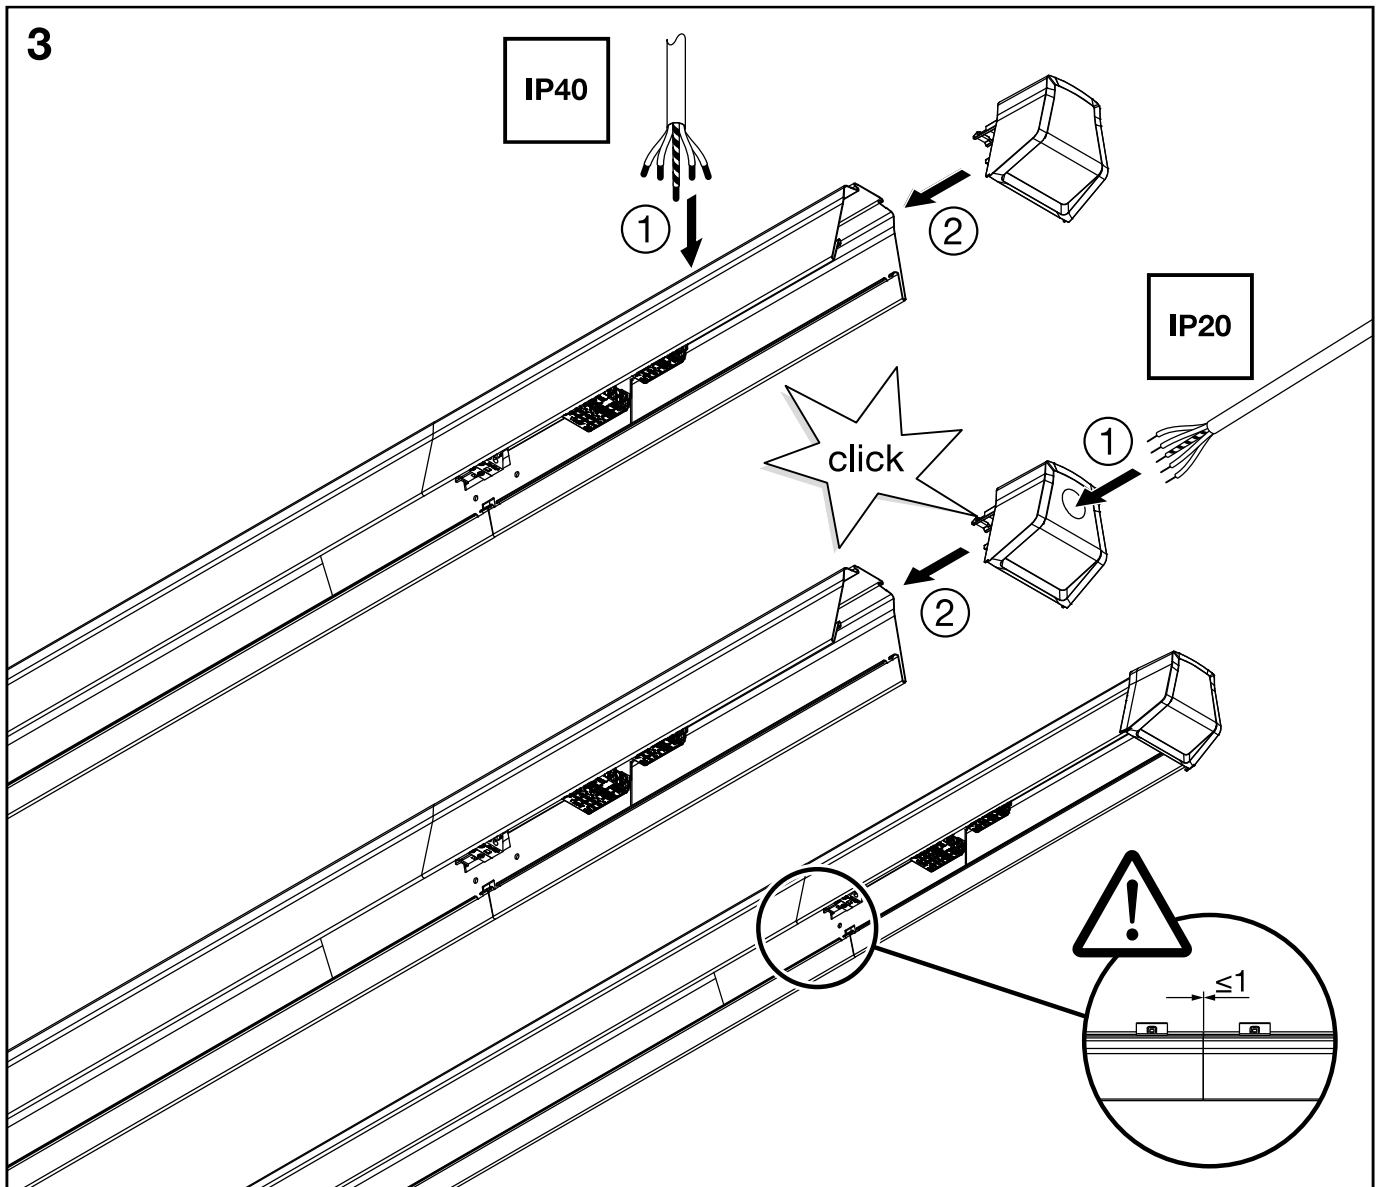

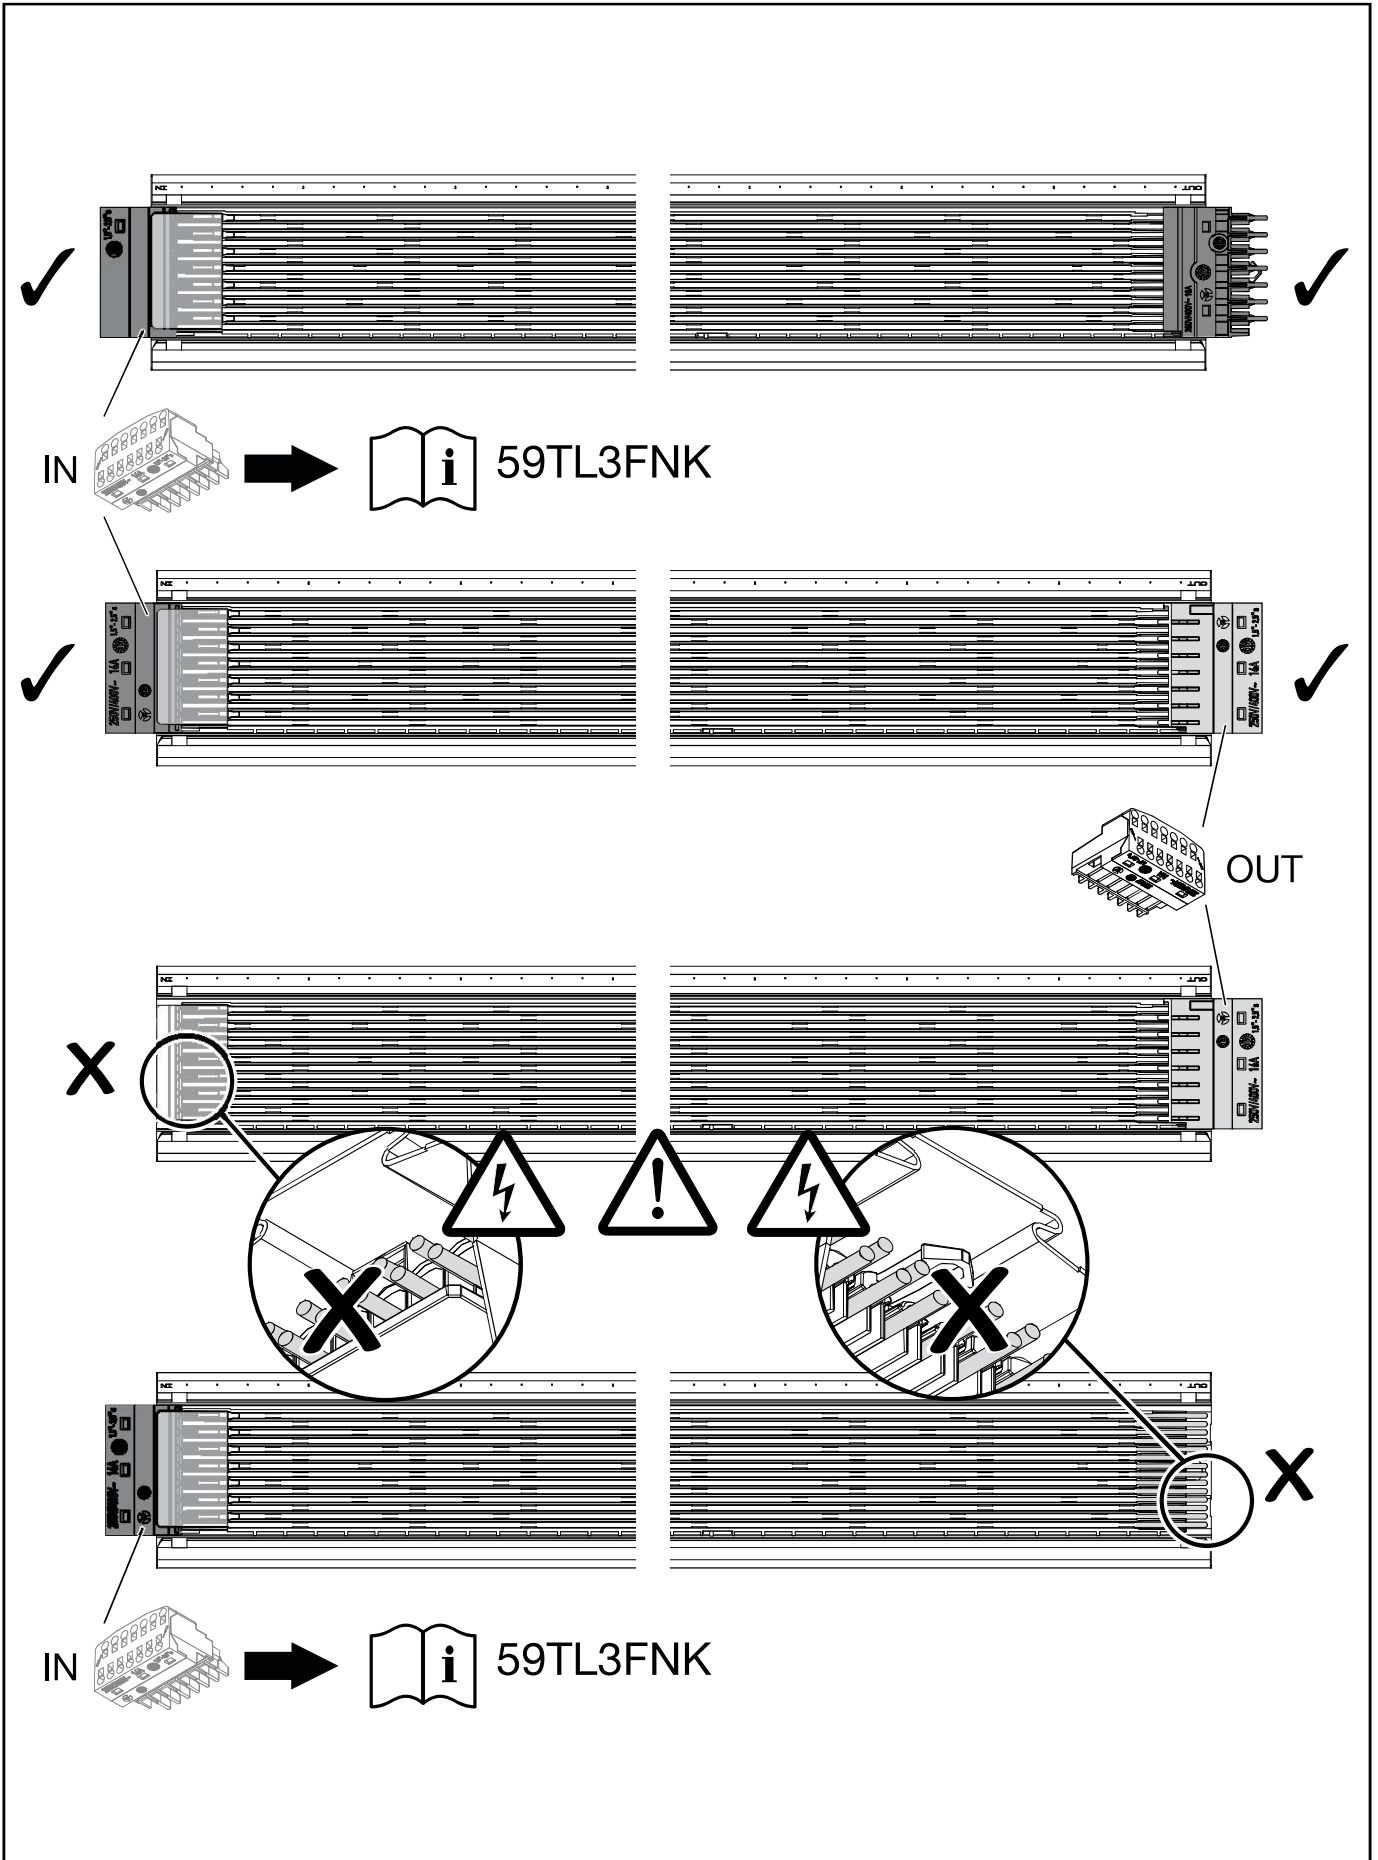

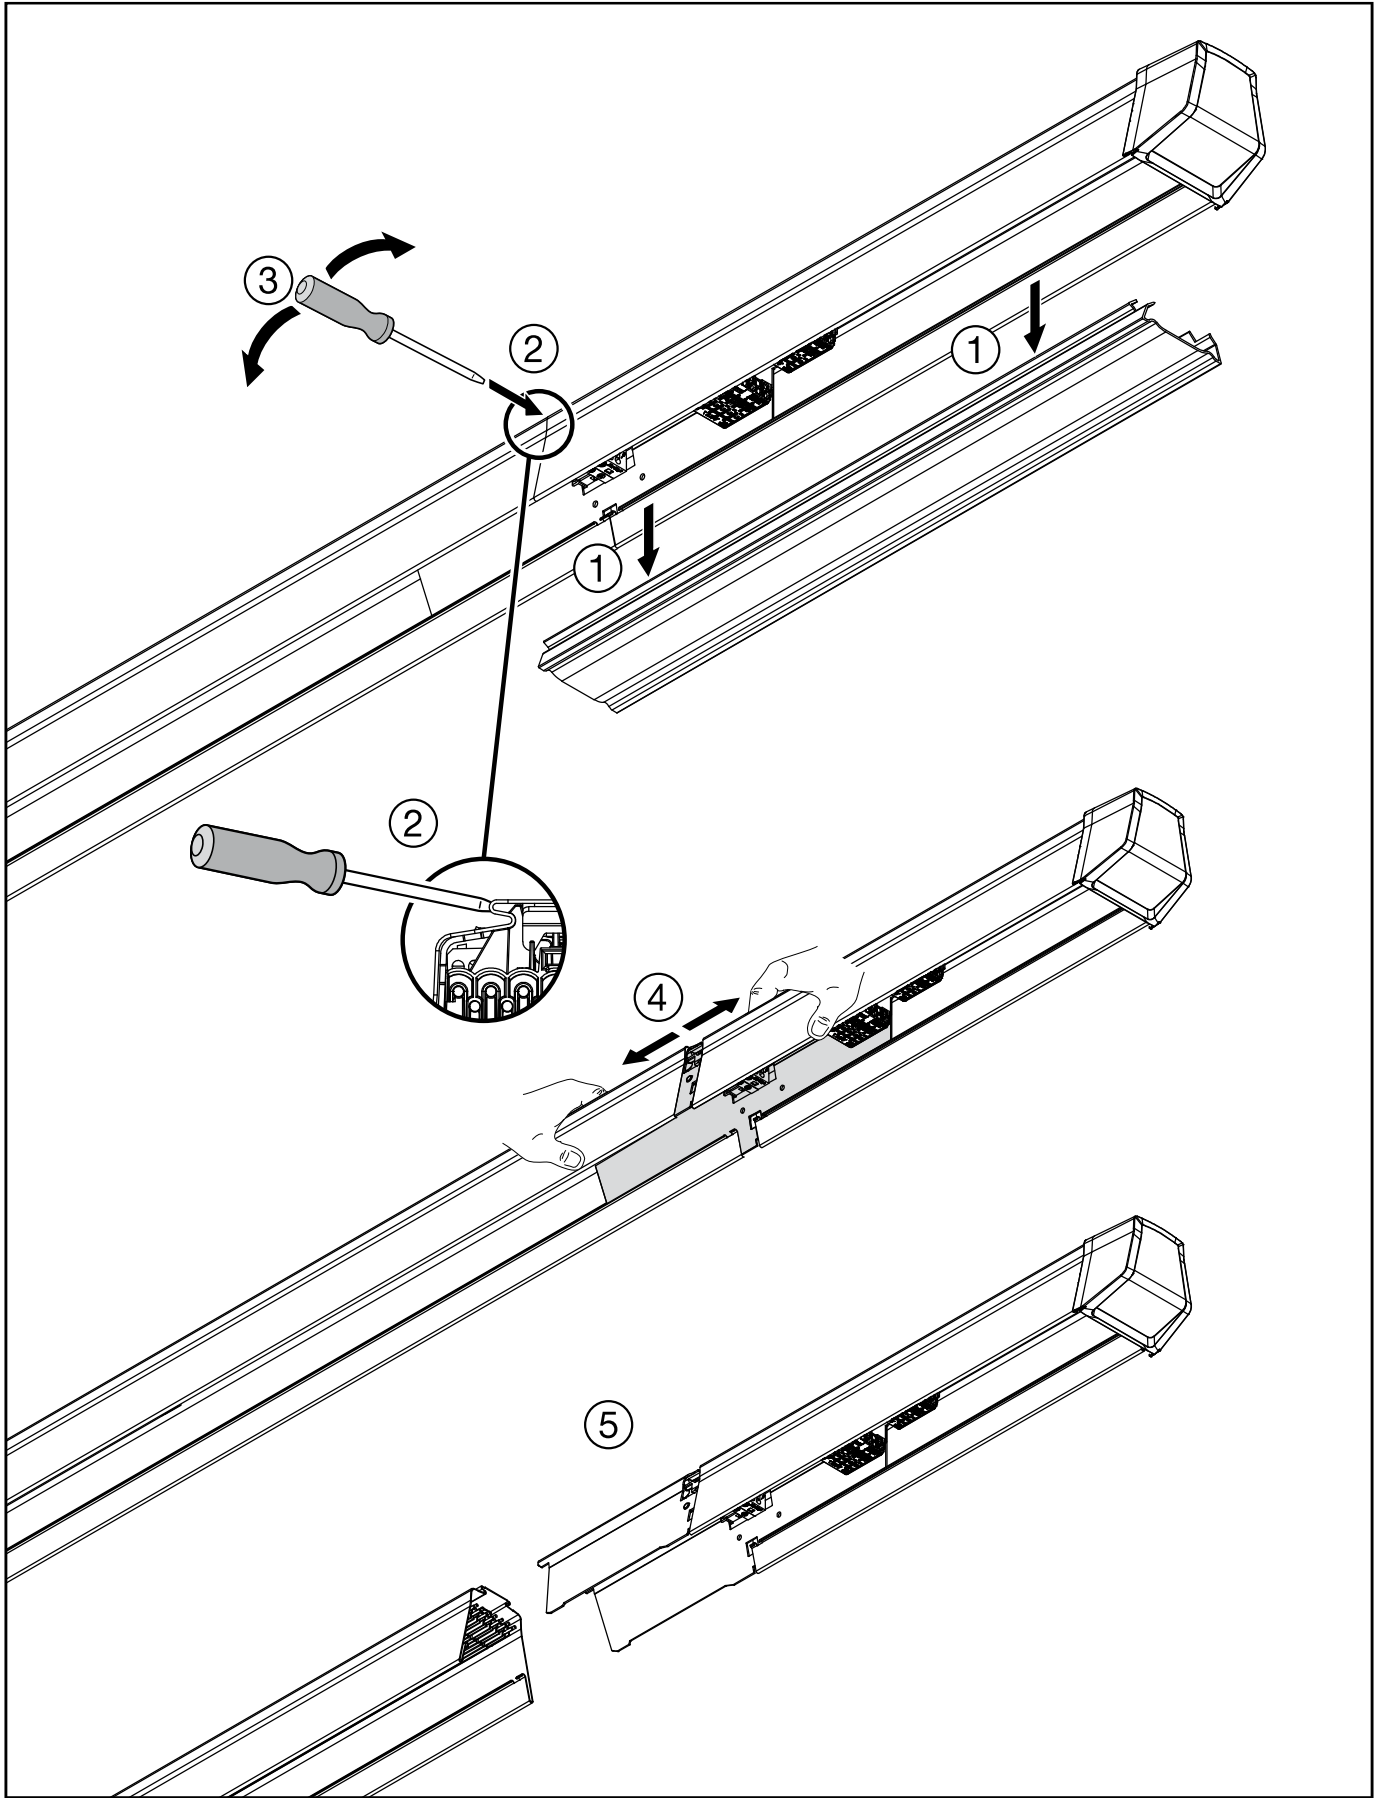

5MA14-258182_ai
25.04.2024 / SCH

Siteco GmbH
Georg-Simon-Ohm-Straße 50
83301 Traunreut, Germany
mail: technicalsupport@siteco.de
Phone: +49 8669 / 33-844
www.siteco.com