



# TIMR-PT 201.927.FL/DALI-ST

Timba Round | Pendant | Track (1xLED 13W 827/2700K 1780lm)

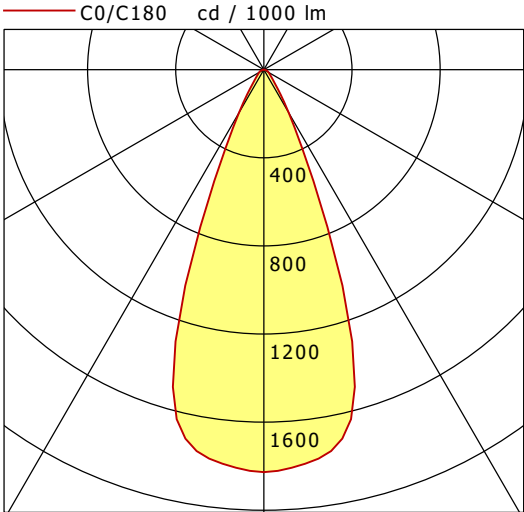

|              | C0   | C90  | C180 | C270 |
|--------------|------|------|------|------|
| 0°           | 1827 | 1827 | 1827 | 1827 |
| 15°          | 1575 | 1575 | 1575 | 1575 |
| 30°          | 226  | 226  | 226  | 226  |
| 45°          | 50   | 50   | 50   | 50   |
| 60°          | 25   | 25   | 25   | 25   |
| 75°          | 11   | 11   | 11   | 11   |
| 90°          | 0    | 0    | 0    | 0    |
| cd / 1000 lm |      |      |      |      |

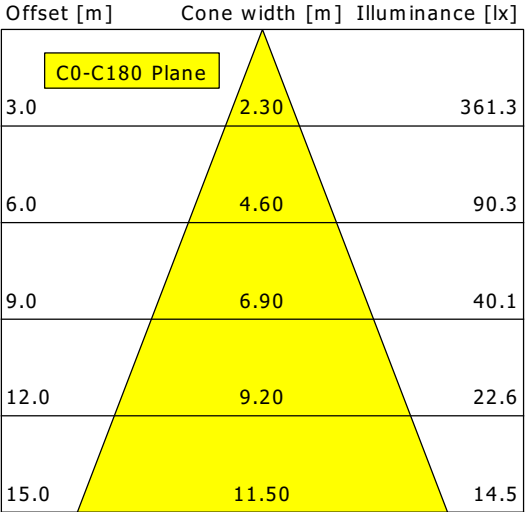

|                    |  |                  |
|--------------------|--|------------------|
| <b>η</b>           |  | LED              |
| Efficiency         |  | 137 lm/W         |
| Direct/Indirect    |  | ↓ 100% / ↑ 0%    |
| System Power       |  | 13 W             |
| <b>UGR</b>         |  | X=4H, Y=8H       |
| Reflection factors |  | 70/50/20         |
| UGR C0/C180        |  | 21.9             |
| UGR C90/C270       |  | 21.9             |
| CIE Flux Codes     |  | 91 97 99 100 100 |
| Ra/CRI             |  | >80              |