



SCOUT 203.930.25.2/DALI-ST

Scout Next (1xLED 29W 930/3000K 3270lm 25°)

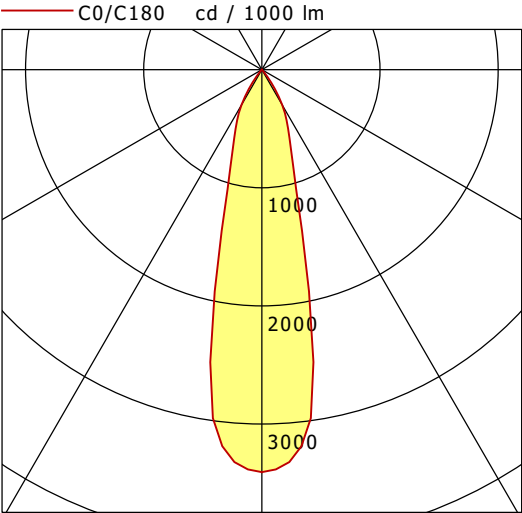

	C0	C90	C180	C270
0°	3407	3407	3407	3407
15°	1207	1207	1207	1207
30°	345	345	345	345
45°	4	4	4	4
60°	2	2	2	2
75°	1	1	1	1
90°	0	0	0	0
cd / 1000 lm				

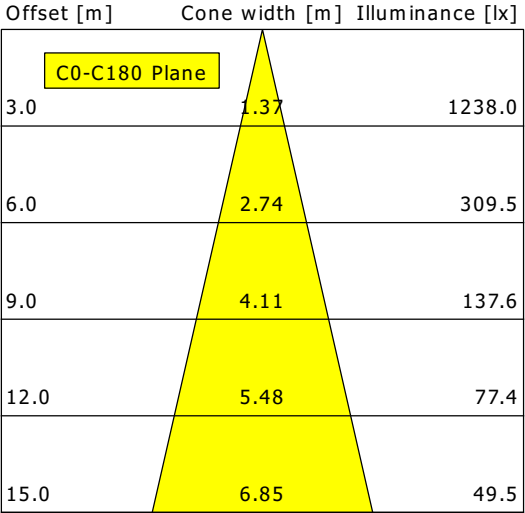

η		LED
Efficiency		113 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		29 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		17.7
UGR C90/C270		17.7
CIE Flux Codes	99 100 100 100 100	
Ra/CRI		> 90