


EL 303.30.2/DALI-ST


EuroLED 300 | Track-Mounted (1xLED 34W 830/3000K 4120lm 75°)

— C0/C180 cd / 1000 lm - - - C90/C270

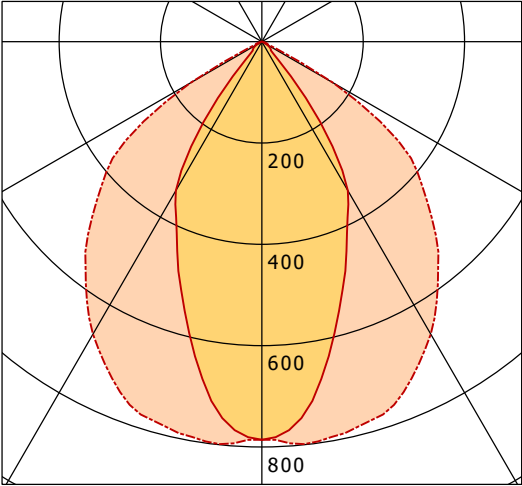

	C0	C90	C180	C270
0°	786	786	786	786
15°	572	780	572	780
30°	339	667	339	667
45°	27	468	27	468
60°	10	164	10	164
75°	1	7	1	7
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

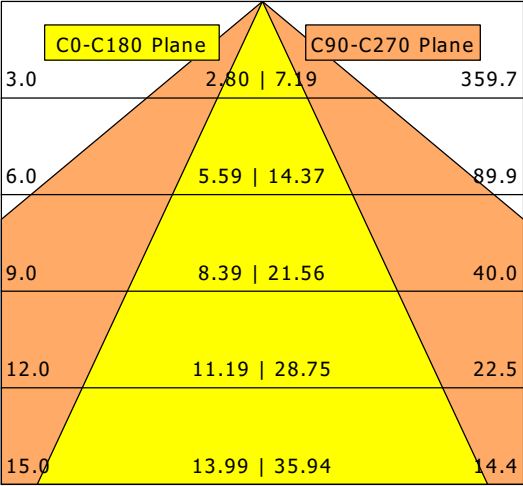

η		LED
Efficiency		121 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		34 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		19.7
UGR C90/C270		28.7
CIE Flux Codes		76 98 100 100 100
Ra/CRI		> 80