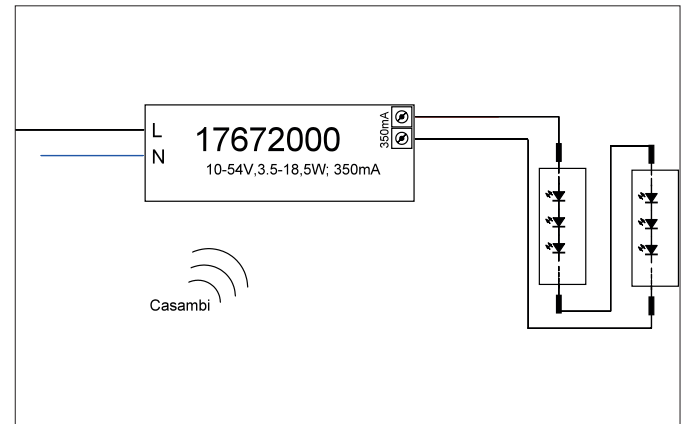


LED converter 350mA, Casambi dimmable

Article no. 17672000

Light.
For Generations.**Tender**

LED converter 350mA, Casambi dimmable. This driver fulfills the requirements for safety lighting systems in accordance with DIN EN 50172 VDE 0108-100:2005-01. This converter is equipped with safety devices which protect it against overvoltage, short-circuit as well as thermal and electric overloads. The input and output terminals are suitable for cables with a cross-section of up to 1.5 mm². Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Current: 350 mA, Voltage: 230V AC 50Hz, Power: 18W, dimmable: Yes, Control: Casambi.

Article data	
Article no.	17672000
GTIN	4251433926689
Short description	LED converter 350mA, Casambi dimmable
Material	Plastic
Length	146 mm
Width	44 mm
Height	30 mm
Scope of delivery	Plug&Play version with 110 mm P&P output cable
Weight	0.159 kg

LED converter 350mA, Casambi dimmable

Article no. 17672000

Light.
For Generations.

Operating technology of driver	
AC nominal voltage min	220 V
AC nominal voltage max	240 V
Frequenz max.	50 Hz
DC nominal voltage min	170 V
DC nominal voltage max	280 V
Current	350 mA
Protection class	II
Degree of protection	IP20
Starting current	5A 50µs
Power min	3.5 W
Power	18 W
Control	Casambi-Push
Environment temperature (ta)	-25 °C bis +45 °C
Measure point (tc)	max. +80 °C
Version	Plug&Play
Power factor	0.95

Packing data	
Gross weight	0.177 kg
Length of packaging	60 mm
Packaging width	27 mm
Packaging height	150 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>