


Connector Location A


Connector Location B

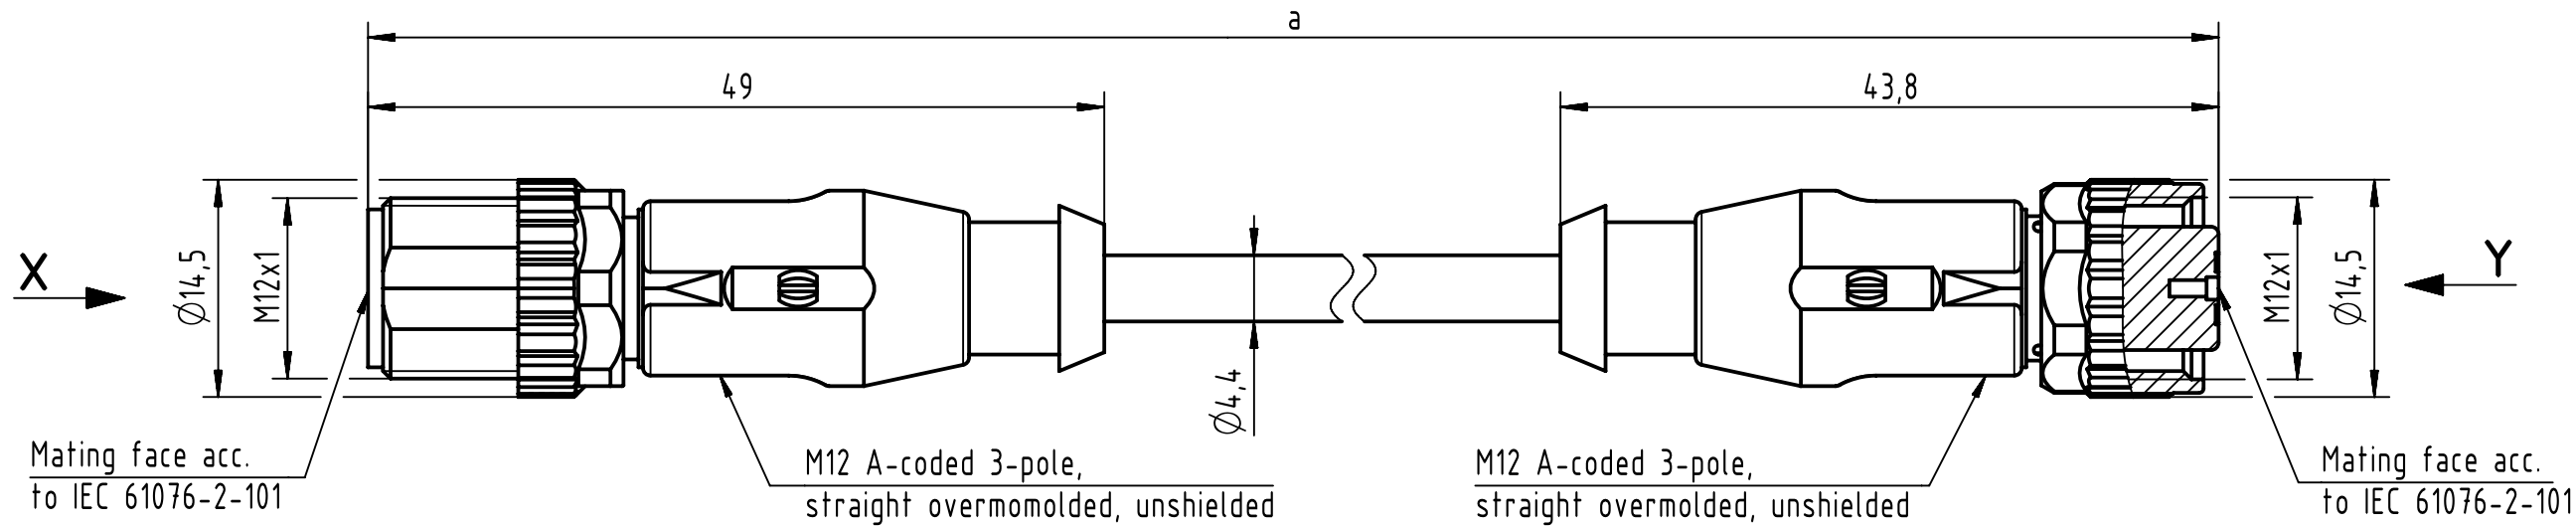



X
male

Y
female

Loading Plan



- 1 brown 1
3 blue 3
4 black 4

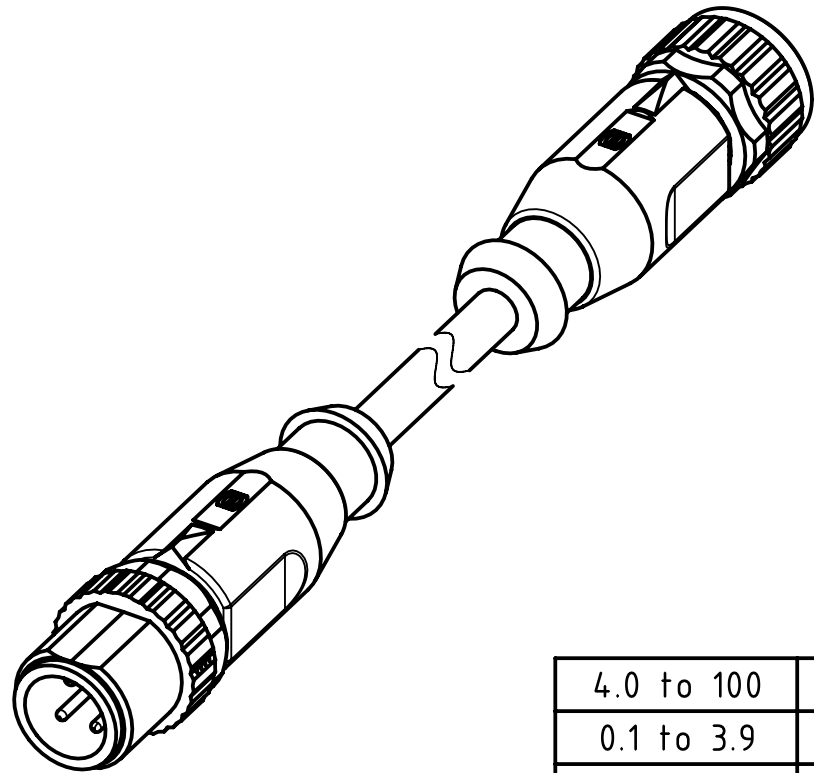

4.0 to 100	±1%
0.1 to 3.9	+0.04
a [m]	Tolerance

length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	12	XXX=120
	11	XXX=110
length in "0.1m" step	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
	0.1	XXX=001
Step	a [m]	XXX

- Protection level: IP67
- Temperature range: -25°C ... +80°C

PVC grey, 3x0.34mm ²	21348485383XXX
Type of cable	Part no.

All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	
All rights reserved		Created by 407576		Inspected by COSTEA		Standardisation MUNTEANV	
Department HCS - RO		Stoica		Costea		Date 2023-04-20	
HARTING Customised Solutions		Title M12 Cable Assembly A-cod st/st m/f		State Final Release		Doc-Key / ECM-Nr. 100578704/UGD/009/D	
D-32339 Espelkamp		Type TB		Number 21348485383XXX		Rev. D	
						Page 1/1	