


LK-L 070.11840.1405.1/DALI


Lichtkanal 070 | Light-Insert (APB, 1xLED 32W 840/4000K 5430lm)

— C0/C180 cd / 1000 lm - - - C90/C270

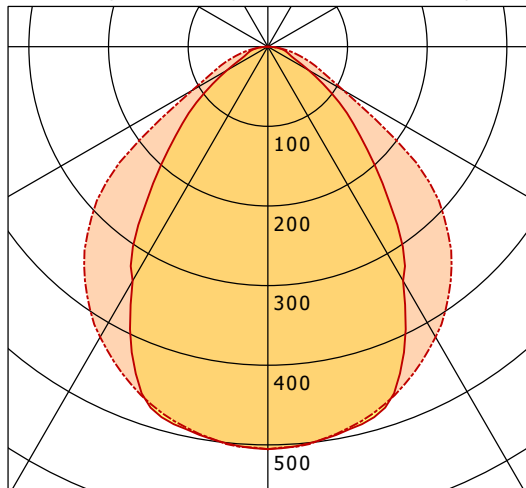

| | C0 | C90 | C180 | C270 |
|--------------|-----|-----|------|------|
| 0° | 505 | 505 | 505 | 505 |
| 15° | 487 | 482 | 487 | 482 |
| 30° | 340 | 421 | 340 | 421 |
| 45° | 170 | 316 | 170 | 316 |
| 60° | 59 | 109 | 59 | 109 |
| 75° | 24 | 38 | 24 | 38 |
| 90° | 1 | 0 | 1 | 0 |
| cd / 1000 lm | | | | |

Offset [m] Cone width [m] Illuminance [lx]

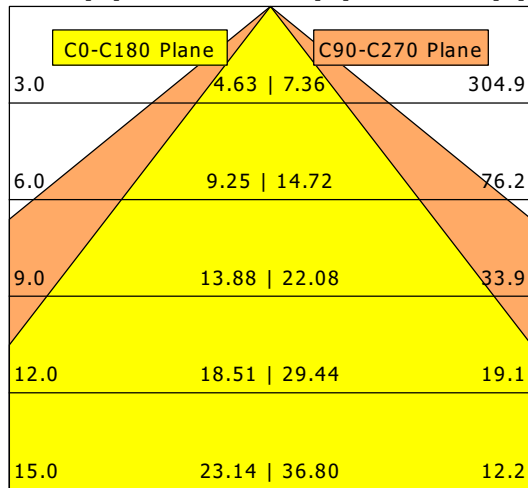

| | |
|--------------------|------------------|
| η | LED |
| Efficiency | 170 lm/W |
| Direct/Indirect | ↓ 100% / ↑ 0% |
| System Power | 32 W |
| UGR | X=4H, Y=8H |
| Reflection factors | 70/50/20 |
| UGR C0/C180 | 21.8 |
| UGR C90/C270 | 24.2 |
| CIE Flux Codes | 63 89 98 100 100 |
| Ra/CRI | >80 |