



ORYO-P 203.940.15/DALI-ST

Oryo 200 | Pendant (1xLED 30W 940/4000K 3080lm 15°)

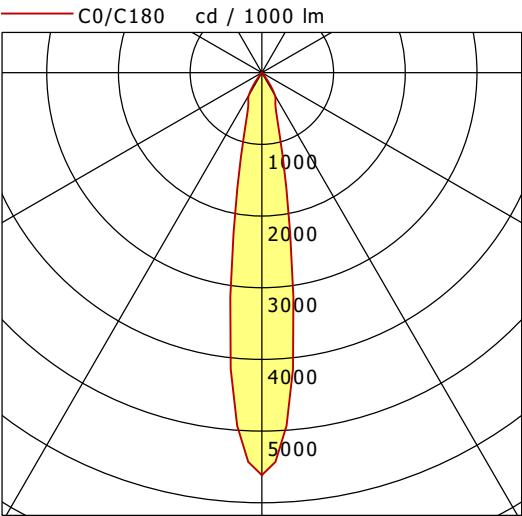

	C0	C90	C180	C270
0°	5615	5615	5615	5615
15°	1034	1034	1034	1034
30°	365	365	365	365
45°	10	10	10	10
60°	9	9	9	9
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

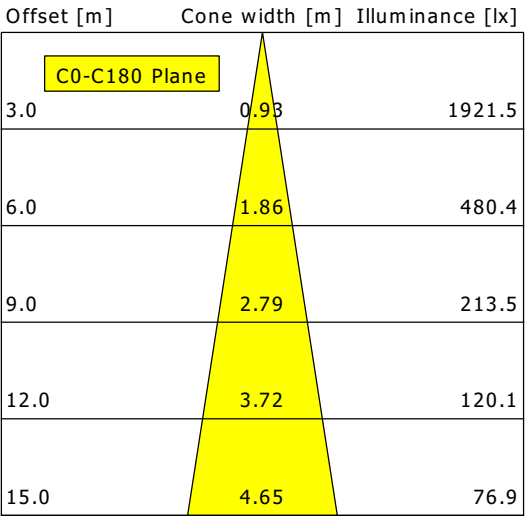

η		LED
Efficiency		103 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		30 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		19.0
UGR C90/C270		19.0
CIE Flux Codes	98 100 100 100 100	
Ra/CRI		> 90