## lightnet

### Matric-GX

Pendant light-line - Direct light distribution

#### Article code: LGXOBL-830M-L1475-A




Illustrations may only be similar and serve as an orientation.

Matric-GX. LED. Pendant light-line. Luminaire body made of high-quality aluminum profile. Surface finish Jet Black. Direct only light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and uniform illumination. Dimmable DALI. LxWxH (rectangular). L=1475mm. W=40mm. H=65mm. Single-cord suspension (Set). Pendant length max 1500mm. Power supply: transparent. Ceiling rose: Matching luminaire`s surface colour. Medium-power current. 2132lm. 18W. 3,2kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 and 50001:2018 certified.

# lightnet

## Matric-GX

Pendant light-line - Direct light distribution

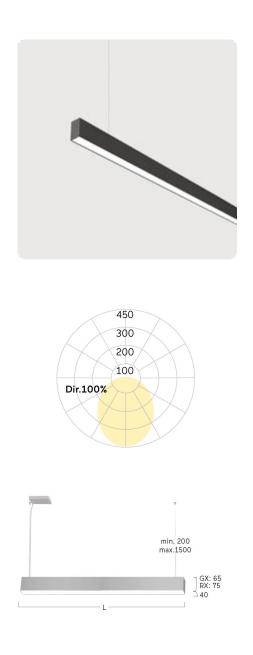

### Article code: LGXOBL-830M-L1475-A

_		_	-
Customer	1	Proi	iect.
Customer	/	1 10	

Note:

Productname Lamp Installation Type Surface finish Light characteristics Colour temperature Colour Rendering Index (CRI) Optical system Control Length L/Diameter D (mm) Width W (mm) Height H (mm) Current/Power Luminous Flux Power consumption Suspension Ceiling rose colour Pendant length (mm) Degree of protection Certification Cable Colour LED lifetime

Photometric code Photobiological class

Indoor/Outdoor

Weight (kg)

Matric-GX LED Pendant light-line Jet Black Direct light distribution 3000K CRI>80 Opal diffuser Dimmable (DALI) L=1475mm W=40mm H=65mm Medium-Power 2132lm 18W Single susp. (Set) Ceiling rose: Matching luminaire`s surface colour Pendant length max 1500mm IP20 Prüfzeichen: ENEC Power supply: transparent L85B10 (tq 25°C) = 50.000h 8 30 / 3 3 9 RG0 (EN62471) Indoor: ta [ambient] max. 25°C 3,2kg

IP20 ⊕ -220- 50-60 IK RG0 ≤3 LOW LOUBD MEDIUM LASSID HIGH LASSID C € K €