



CSARL 71.3040.25/DALI

CSA 71 Round (1xLED 29W 840/4000K 3300lm 25 °)

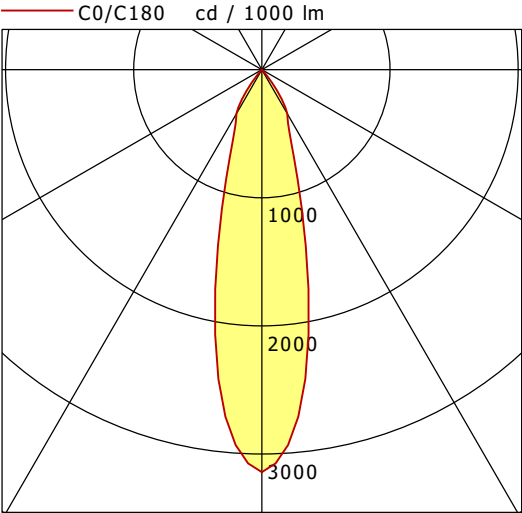

	C0	C90	C180	C270
0°	3142	3142	3142	3142
15°	1267	1267	1267	1267
30°	397	397	397	397
45°	5	5	5	5
60°	4	4	4	4
75°	3	3	3	3
90°	0	0	0	0
cd / 1000 lm				

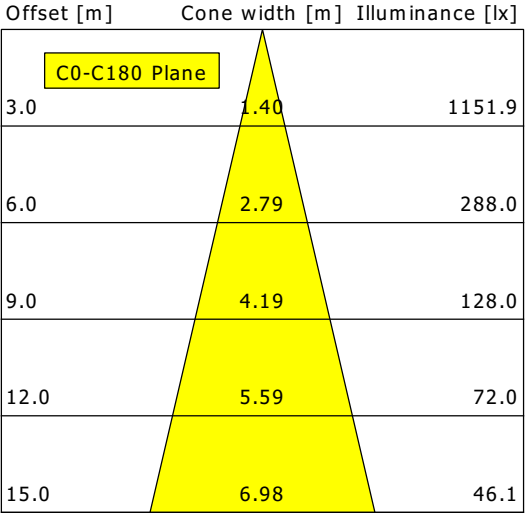

η		LED
Efficiency		114 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		29 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		19.1
UGR C90/C270		19.1
CIE Flux Codes	98 99 100 100 100	
Ra/CRI		> 80