



SCOUT 202.927.25.2/DALI-ST

Scout Next (1xLED 21W 927/2700K 2260lm 25°)

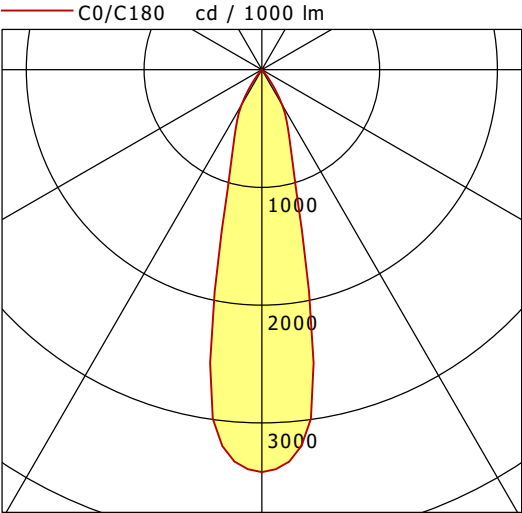

	C0	C90	C180	C270
0°	3418	3418	3418	3418
15°	1206	1206	1206	1206
30°	345	345	345	345
45°	4	4	4	4
60°	2	2	2	2
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

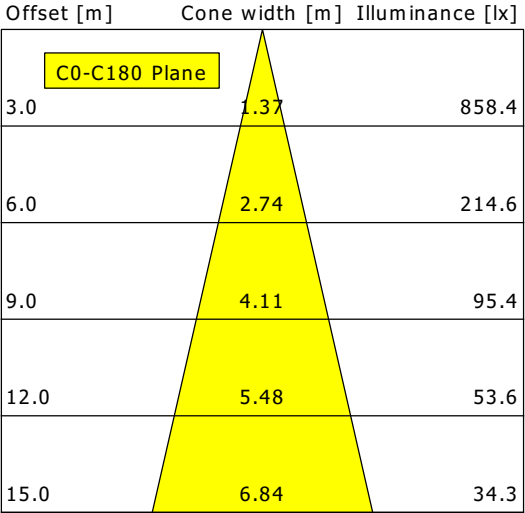

η		LED
Efficiency		108 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		21 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		16.4
UGR C90/C270		16.4
CIE Flux Codes	99 100 100 100 100	
Ra/CRI		>90