


lightnet

Matric-A3

Surface mounted light-line - Direct light distribution

Article code: LA3LBE-830E-L1002-G

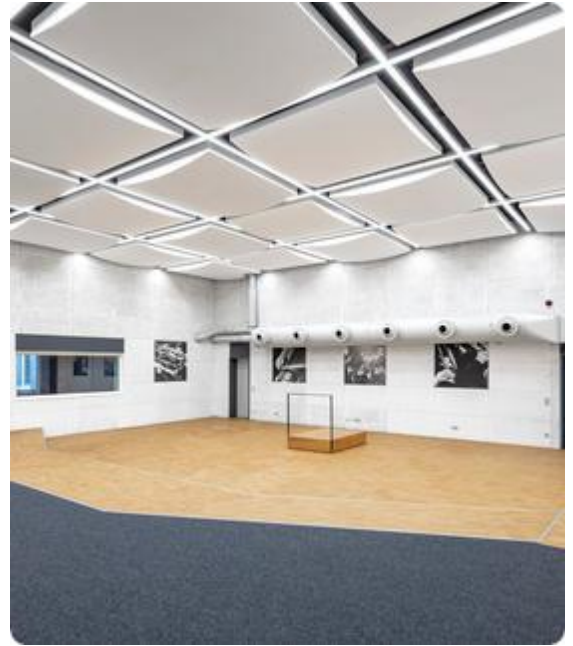

Illustrations may only be similar and serve as an orientation.

Matric-A3. LED. Wall or ceiling mounted light-line. Luminaire body made of high-quality aluminum profile. Surface finish Jet $\text{\textcircled{E}}$ Black. Direct only light distribution. Colour temperature: 3000 $\text{\textcircled{E}}$ (Warm White). Colour Rendering Index (CRI): >80. Lens Louvre: precision lenses with louvre. High glare limitation, compatible for office applications. UGR \leq 19. Reflector: Satin Gold. Switchable. LxWxH (rectangular). L=1002mm. W=

55mm. H=75mm. Low-power current. 1711lm. 14W. 2,9kg. Binning initial \leq MacAdam 3. IP20. Protection class I. CE, UKCA marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,2%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L90B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated

lightnet

Matric-A3

Surface mounted light-line - Direct light distribution

Article code: LA3LBE-830E-L1002-G



Customer / Project: _____

Note: _____

Productname	Matric-A3
Lamp	LED
Installation Type	Surface mounted light-line
Surface finish	Jet Black
Light characteristics	Direct light distribution
Colour temperature	3000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Lens Louvre
Reflector Colour Inside	Reflector: Satin Gold
Control	Switchable
Length L/Diameter D (mm)	L=1002mm
Width W (mm)	W=55mm
Height H (mm)	H=75mm
Current/Power	Low-Power
Luminous Flux	1711lm
Power consumption	14W
Degree of protection	IP20
Certification	Prüfzeichen: ENEC
LED lifetime	L90B10 (tq 25°C) = 50.000h
UGR	UGR≤19
Photometric code	8 30 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	2,9kg

