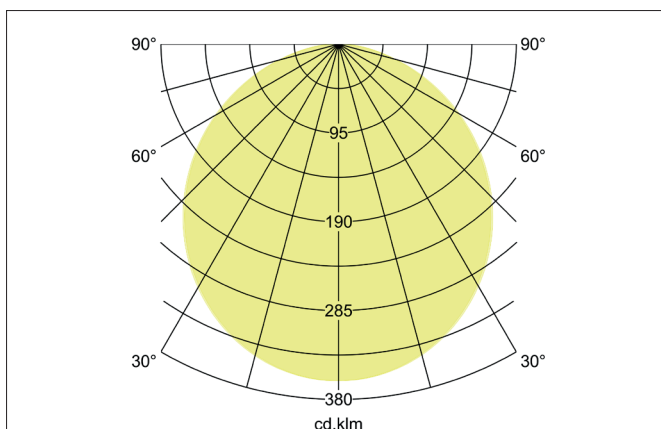
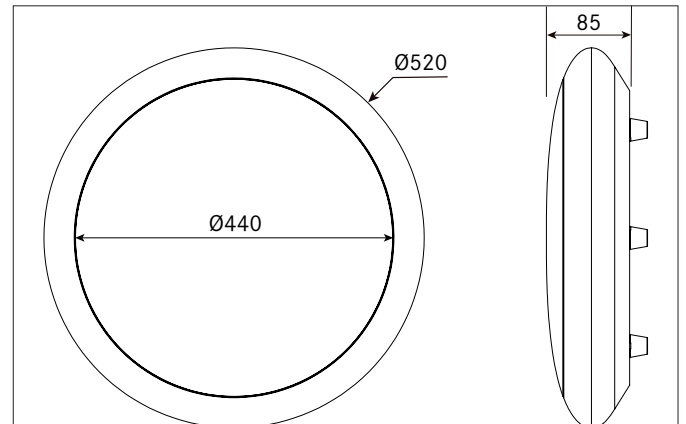


**GAVAN MAXI LED ceiling surface-mounted luminaire, IP65, on/off switchable**

Article no. 32036074

Light.  
For Generations.**Tender**

LED ceiling surface-mounted luminaire, IP65, on/off switchable, Round. Ceiling cut-out Installation depth mm, Outer diameter 520 mm, Weight 2,306 kg, with rotationssymmetrical, deep, wide distributed light intensity. optimal light distribution due to a plastic, opal cover. Luminous flux 3.020 lm, Power 1 x 30 W, System Efficiency 101 lm/W, Light colour neutral white, Correlated color temprature (CCT) 4.000 K, Colour rendering index CRI > 80, Rated life time L70/B50 at 25 °C: 50.000 h, Housing material: Plastic, Colour: White, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): II, Degree of protection (DIN EN 60529): IP65, shock resistance according to IEC62262: IK10 .With electronic driver, on/off switchable.

**Product Benefits**

- Ceiling surface-mounted luminaire made of impact-resistant plastic with a diameter of 520 mm, installation height 85 mm.
- Luminous flux 2700 lm, IK10, IP65, housing made of PMMA plastic.
- 3 different diameters available in the same look.
- This allows the realization of the projects with different lighting requirements in a consistent design.

**GAVAN MAXI LED ceiling surface-mounted luminaire, IP65, on/off switchable**

Article no. 32036074

Light.  
For Generations.

Article data	
Article no.	32036074
GTIN	4251433935865
Series name	GAVAN MAXI
Short description	LED ceiling surface-mounted luminaire, IP65, on/off switchable
Material	Plastic
Colour	White
Type of surface	Matt
Shape	Round
Outer diameter	520 mm
Hight	85 mm
Scope of delivery	Incl. converter for connection to the 230-V mains voltage, on/off switchable
Weight	2.306 kg

Lighting technology	
Colour temperature	4.000 K
Light colour	White
Light output	Direct
Luminous flux	3,020 lm
System efficiency	101 lm/W
Colour rendering	CRI > 80
Beam angle	120°
Light sharing	Symmetric

Operating technology of the luminaire	
System output	30 W
Voltage type	AC
AC nominal voltage max	230 V
Frequenz max.	50 Hz
Lamp	LED
Protection class	II
Degree of protection	IP65
Dimmable	No
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Rated life time L70/B50 at 25 °C	50,000 h

Mounting technology	
Mounting method	Surface mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Impact resistance	IK10
Material cover	Plastic, opal

Packing data	
Gross weight	2.97 kg
Length of packaging	565 mm
Packaging width	565 mm
Packaging hight	100 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.