



FLIR 100.1027.35/DALI

Flixx 100 Round (FLIRZ 100.05, 1xLED 15W 827/2700K 1290lm 35 °)

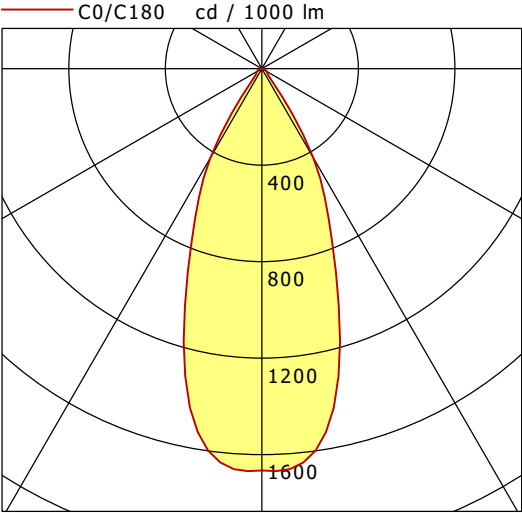

	C0	C90	C180	C270
0°	1666	1666	1666	1666
15°	1246	1246	1246	1246
30°	426	426	426	426
45°	36	36	36	36
60°	23	23	23	23
75°	12	12	12	12
90°	1	1	1	1
cd / 1000 lm				

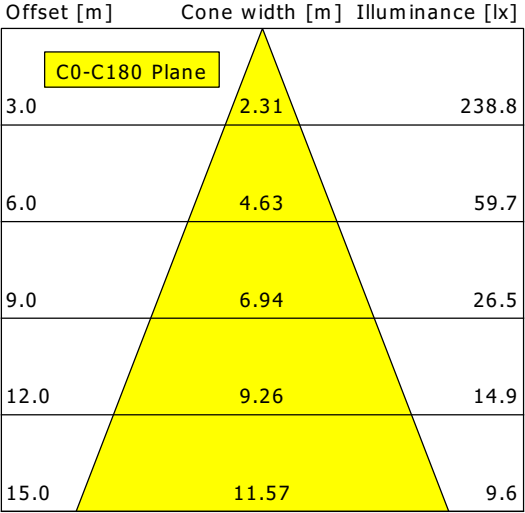

η		LED
Efficiency		86 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		15 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		24.2
UGR C90/C270		24.2
CIE Flux Codes	91 96 99 100 100	
Ra/CRI		> 80