# **POLEM4 Twin mounting pole**

### For eMH3 and eM4 Twin Wallboxes

The POLEM4 Twin mounting pole is used for mounting an eMH3 or eM4 Twin Wallbox from ABL. The POLEM4 Twin impresses with its attractive and compact metal housing, including rear access protecting the internal components. The mounting pole is fully pre-installed with integrated terminal blocks. An additional, free top-hat rail is pre-mounted for further installations and a C-rail is provided for strain relief of the supply cable. The charging pole is colour coordinated (RAL 9011) with the weather shield WPR36 and the cable storage holder CABHOLD, blending harmoniously into the overall look of the charge point. The LEDs with twilight switch integrated at the top end ensure sufficient illumination of the wallbox, even in difficult lighting conditions. Thanks to the factory-fitted threaded bolts covered with blind plugs, no subsequent drilling is necessary. For maximum stability, ABL recommends installing the mounting pole on the optionally available prefabricated concrete foundation EMH9999.



Separately available eM4 Twin Wallbox not included

#### **General information**

Model	Mounting pole for eMH3 and eM4 Twin Wallboxes
Product number	100000192
EAN number	4011721191355
Commodity code	8538 9099
Packaging unit (PU)	1 unit
Items supplied	Mounting pole, mounting kit, download notice

#### **Connections**

External power supply	For supply cable sizes up to 5 x 25 mm <sup>2</sup>
Rated voltage (power supply)	230 / 400 V
Rated current (power supply)	Up to 32 A, 3-phase
Rated frequency	50 Hz



### **Integrated components**

Lighting control	LED with twilight switch
Power supply (lighting)	12 V DIN rail mains adapter 6 A, single pole, C characteristic MCB
Terminal blocks	Main line branch terminal 5-pole for conductors up to 25 mm <sup>2</sup>
Mounting rails	2 DIN rails (150 × 35 mm) C rail (120 × 35 mm)

# **Operating conditions**

Storage temperature	-30 to 85°C
Operating temperature	-30 to 40°C
Max. internal temperature	-30 to 55°C
Relative humidity	5 to 95%, no condensation
Degree of protection (housing)	IP44
Maximum elevation	≤ 2,000 m above mean sea level

### Housing


Туре	Metal mounting pole with rear access
Fixing type	Screw fixings for installation on separately available EMH9999 prefabricated concrete foundation
Material (mounting pole)	Electro galvanised sheet metal (DC01+ZE25/25-0)
Mounting pole finish	Fine-textured, satin powder coated
Material (base plate)	Plate metal (DD11)
Housing colour	RAL 9011
Locking mechanism	Cam lock, double bit, 3 mm mandrel
Product dimensions (H×W×D)	1,647 × 405 × 180 mm
Packaging dimensions (H×W×D)	1,670 × 430 × 210 mm
Weight (net)	Approx. 26 kg
Weight (gross)	Approx. 29 kg

# **Optional accessories**

Foundation	EMH9999
Cable storage holder with charging plug receptacle	CABHOLD
Weather protection roof	WPR36

TECHNICAL DATA SHEET ABL

# **Dimensioned drawing**

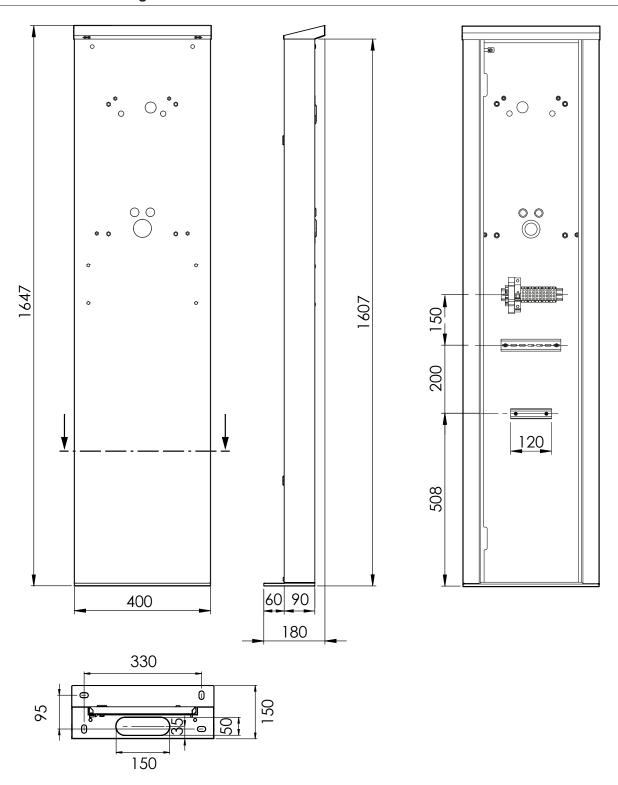

Subject to change: All performance characteristics, technical and other specifications are subject to change without prior notice.