

ix Type A 4x2xAWG26/7 PUR 15m

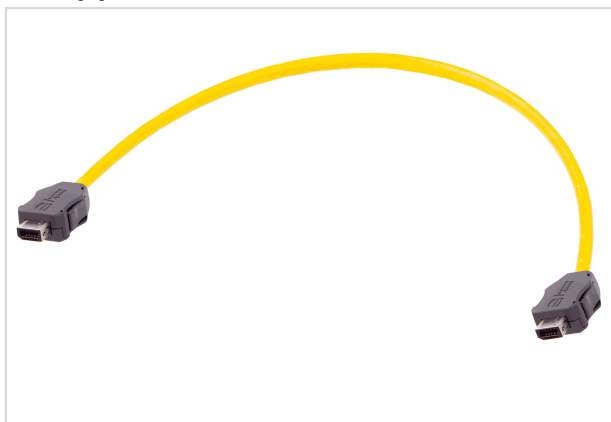


Image is for illustration purposes only. Please refer to product description.

| | |
|--------------------|---|
| Part number | 33 48 010 1804 150 |
| Specification | ix Type A 4x2xAWG26/7 PUR 15m |
| HARTING eCatalogue | https://b2b.harting.com/33480101804150 |

Identification

| | |
|---------------|-------------------------------|
| Category | System cabling |
| Series | HARTING ix Industrial® |
| Element | Cable assemblies |
| Specification | Pre-assembled on both sides |
| Connector 1 | HARTING ix Industrial® Type A |
| Connector 2 | HARTING ix Industrial® Type A |
| Type of cable | Copper cable (round) |

Version

| | |
|--------------------|-----------------|
| Cable length | 15 m |
| Number of cores | 8 |
| Core structure | 4x 2x AWG 26/7 |
| Termination method | IDC termination |
| Coding | Type A |

Technical characteristics

| | |
|------------------------------|--|
| Transmission characteristics | Cat. 6 _A Class E _A up to 500 MHz |
| Data rate | 10 Mbit/s |
| | 100 Mbit/s |
| | 1 Gbit/s |
| | 2.5 Gbit/s |
| | 5 Gbit/s |
| | 10 Gbit/s |



Pushing Performance
Since 1945

Technical characteristics

| | |
|----------------------|------------------------|
| Limiting temperature | -40 ... +80 °C unmoved |
| | -40 ... +80 °C moved |

Material properties

| | |
|------------------|--------------------|
| Material (cable) | PUR (polyurethane) |
| Colour (cable) | Yellow |

Specifications and approvals

| | |
|----------------|--|
| Specifications | IEC 60332-1-2 Flame retardancy |
| | IEC 60754-1 Halogen freeness |
| | EN 60811-404 Oil resistance |
| | UN/ECE-R 118 fire protection for rolling stock |

Commercial data

| | |
|--------------------------------|--|
| Packaging size | 1 |
| Country of origin | Latvia |
| European customs tariff number | 85444290 |
| GTIN | 5713140259614 |
| eCl@ss | 27060390 Ready-made data cable (unspecified) |