
lightnet

Matric-F3

Recessed mounted light line, mounting brackets incl - Direct light distribution

Article code: LF3OEL-840H-L615



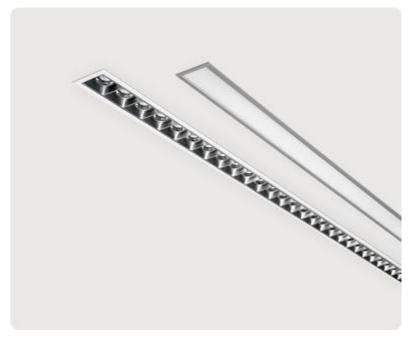

Illustrations may only be similar and serve as an orientation.

Matric-F3. LED. Recessed mounted light line with surrounding frame for installation in sawn wall and ceiling with cut-out openings. Mounting brackets included. Luminaire body made of high-quality aluminum profile. Surface finish Silver Anodised. Direct only light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and perfect uniform illumination. Dimmable


DALI. LxWxH (rectangular). L=615mm. W=70mm. H=75mm. High-power current. 1790lm. 17W. 1,7kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,4%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L80B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated


lightnet

Matric-F3

Recessed mounted light line, mounting brackets incl - Direct light distribution







Article code: LF3OEL-840H-L615

Customer / F	Project:		
Note:			

Productname Matric-F3 Lamp LED

Installation Type Recessed mounted light line, mounting

brackets incl

Surface finish Silver Anodised
Light characteristics Direct light distribution

Colour temperature 4000K

Colour Rendering Index (CRI) CRI>80

Optical system Opal diffuser
Control Dimmable (DALI)

Length L/Diameter D (mm)

Width W (mm)

Height H (mm)

Current/Power

Luminous Flux

Power consumption

Diffinable (L
L=615mm
W=70mm
H=75mm
High-Power
1790lm
17W

Certification Prüfzeichen: ENEC

LED lifetime L80B10 (tq 25° C) = 50.000h

IP20

Photometric code 8 40 / 3 3 9
Photobiological class RG0 (EN62471)

Indoor/Outdoor Indoor: ta [ambient] max. 25°C

Weight (kg) 1,7kg

Degree of protection

