



LUNXS 401.840.1/DALI

Lunata XSmall (1xLED 18W 840/4000K 1820lm)

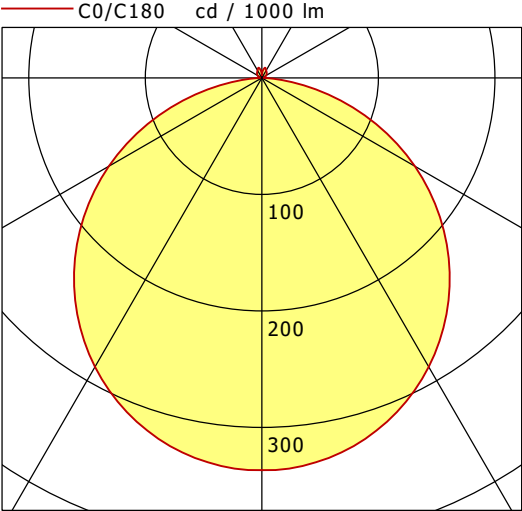

	C0	C90	C180	C270
0°	337	337	337	337
15°	324	324	324	324
30°	286	286	286	286
45°	227	227	227	227
60°	152	152	152	152
75°	65	65	65	65
90°	2	2	2	2
cd / 1000 lm				

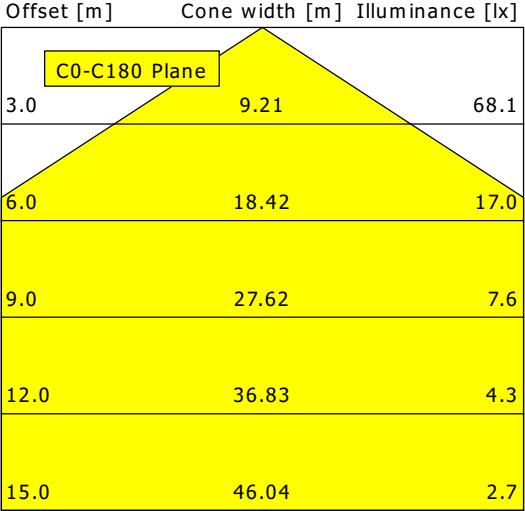

η	LED
Efficiency	101 lm/W
Direct/Indirect	↓ 97% / ↑ 3%
System Power	18 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	21.7
UGR C90/C270	21.7
CIE Flux Codes	47 79 96 97 100
Ra/CRI	> 80