

Connector - 7 poles, with Multi-Grip




Product description	
BALS-Prd.-Nr	31512
EAN	4024941315128
product category (PG)	Connector TE
current (A)	16A
number of poles (P99)	7p
number of poles (P)	6p+PE
position of earth contact (H)	9 h
voltage (V)	230V
frequency (HZ)	50 and 60Hz

Product description	
protection degree (SA)	IP67
colour code 1 (KF1)	blue RAL 5015
Colour of appliance	Enclosure blue RAL 5015, Hinged lid blue RAL 5015, Bayonet ring grey RAL 7035, Cable gland grey RAL 7035
connection design (AT)	with screw terminal
maximum conductor size (LQ)	2,5 qmm
cable entry (KE)	Cable gland
Height	168mm
Width	87mm
Depth	92mm
material of enclosure (GM)	Polyamide
contact	The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated

Additional technical properties	
	For cable diameter from 10 up to max. 21 mm, Multi-Grip cable gland with gasket, integrated cable clamp and additional water evacuation openings

Logistics data	
Weight/pcs	0.295 kg / Piece
Packaging	Bag
Content amount	1 ST
EAN	4024941315128

Logistics data	
Length	92 mm
Width	87 mm
Height	168 mm
Weight	0.296 kg
Volume	1,344.672 ccm
Packaging	Carton
Content amount	10 ST
EAN	4024941823715
Length	258 mm
Width	183 mm
Height	212 mm
Weight	3.102 kg
Volume	8,750 ccm

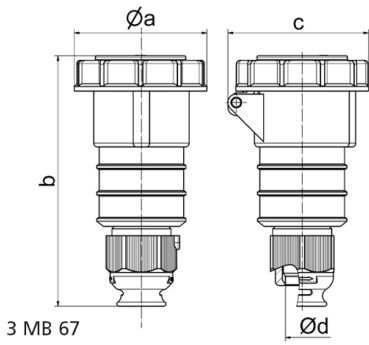

Ampere	16	32							
Polzahl	7	7							
a ø	86,5	101,5							
b	168,0	200,0							
c	93,0	107,0							
d ø	21,0	27,0							
Leiter mm ² min	1	2,5							
Leiter mm ² max	2,5	6							

3 MB 67