

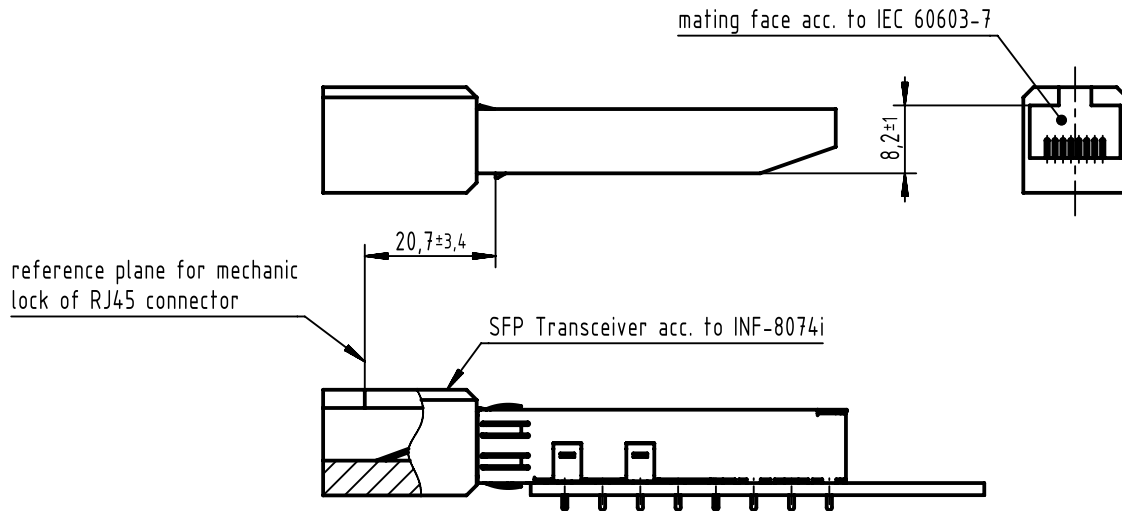





1	2	3	4	5	6	7	8																						
A	<div><div></div><div>PushPull XS SFP RJ45 Cable</div><div></div></div>							A																					
<div>General information</div>				<div>Electrical performance of data connector</div>																									
<table><tr><td>Design</td><td>PushPull XS SFP RJ45 Plug Connector, overmoulded, mating face of data modul acc. to DIN EN 60603-7</td></tr><tr><td>No. of contacts</td><td>8-pole</td></tr><tr><td>Test voltage</td><td>500 V</td></tr></table>				Design	PushPull XS SFP RJ45 Plug Connector, overmoulded, mating face of data modul acc. to DIN EN 60603-7	No. of contacts	8-pole	Test voltage	500 V	<table><tr><td>Transmission performance</td><td colspan="3">Category 5 / class D up to 100MHz acc. to ISO/IEC 11801:2002, EN 50173-1</td></tr><tr><td>Transmission rate</td><td colspan="3">10/100 Mbit/S</td></tr><tr><td>Shielding</td><td colspan="3">fully shielded, 360° shielding contact</td></tr><tr><td>Cable diameter stranded</td><td colspan="3">AWG 26/7</td></tr></table>				Transmission performance	Category 5 / class D up to 100MHz acc. to ISO/IEC 11801:2002, EN 50173-1			Transmission rate	10/100 Mbit/S			Shielding	fully shielded, 360° shielding contact			Cable diameter stranded	AWG 26/7		
Design	PushPull XS SFP RJ45 Plug Connector, overmoulded, mating face of data modul acc. to DIN EN 60603-7																												
No. of contacts	8-pole																												
Test voltage	500 V																												
Transmission performance	Category 5 / class D up to 100MHz acc. to ISO/IEC 11801:2002, EN 50173-1																												
Transmission rate	10/100 Mbit/S																												
Shielding	fully shielded, 360° shielding contact																												
Cable diameter stranded	AWG 26/7																												
B	<table><tr><td>Temperature range</td><td>-20° C ... +80° C</td></tr><tr><td>Termination technology</td><td>IDC</td></tr><tr><td>Mating cycles</td><td>50</td></tr><tr><td>IP - Protection</td><td>IP 65/67 when mated</td></tr></table>			Temperature range	-20° C ... +80° C	Termination technology	IDC	Mating cycles	50	IP - Protection	IP 65/67 when mated	<div>Connection Pin assignment in accordance with EIA / TIA 568 B:</div>																	
Temperature range	-20° C ... +80° C																												
Termination technology	IDC																												
Mating cycles	50																												
IP - Protection	IP 65/67 when mated																												
				<table><tr><th>Pin</th><th>EIA / TIA 568 B</th></tr><tr><td>1</td><td>white orange</td></tr><tr><td>2</td><td>orange</td></tr><tr><td>3</td><td>white green</td></tr><tr><td>4</td><td>blue</td></tr><tr><td>5</td><td>white blue</td></tr><tr><td>6</td><td>green</td></tr><tr><td>7</td><td>white brown</td></tr><tr><td>8</td><td>brown</td></tr></table>				Pin	EIA / TIA 568 B	1	white orange	2	orange	3	white green	4	blue	5	white blue	6	green	7	white brown	8	brown				
Pin	EIA / TIA 568 B																												
1	white orange																												
2	orange																												
3	white green																												
4	blue																												
5	white blue																												
6	green																												
7	white brown																												
8	brown																												
C	<table><tr><td>Insertion force</td><td>60 N</td></tr><tr><td>Withdrawal force</td><td>40 N</td></tr><tr><td>Retention force</td><td>200 N</td></tr></table> <table><tr><td>Environment &amp; mechanical tests</td><td>IEC 61753-1 category E</td></tr><tr><td>RoHS - compliant</td><td>Yes</td></tr><tr><td>UL file</td><td>pending</td></tr></table>			Insertion force	60 N	Withdrawal force	40 N	Retention force	200 N	Environment & mechanical tests	IEC 61753-1 category E	RoHS - compliant	Yes	UL file	pending														
Insertion force	60 N																												
Withdrawal force	40 N																												
Retention force	200 N																												
Environment & mechanical tests	IEC 61753-1 category E																												
RoHS - compliant	Yes																												
UL file	pending																												
<div>Insulator material</div>																													
<table><tr><td>Material</td><td>PC (Connector) + PA (Unlocking Ring) + TPE (overmoulding)</td></tr><tr><td>Color</td><td>black (coding/polarisation indicator available in yellow, red, blue and green)</td></tr><tr><td>UL classification</td><td>UL 94-V0</td></tr></table>				Material	PC (Connector) + PA (Unlocking Ring) + TPE (overmoulding)	Color	black (coding/polarisation indicator available in yellow, red, blue and green)	UL classification	UL 94-V0																				
Material	PC (Connector) + PA (Unlocking Ring) + TPE (overmoulding)																												
Color	black (coding/polarisation indicator available in yellow, red, blue and green)																												
UL classification	UL 94-V0																												
<div>Contact material</div>																													
<table><tr><td colspan="2">Data contacts</td></tr><tr><td>Contact material</td><td>Copper alloy</td></tr><tr><td>Plating termination zone</td><td>Au</td></tr><tr><td>Plating contact zone I</td><td>Au</td></tr></table>				Data contacts		Contact material	Copper alloy	Plating termination zone	Au	Plating contact zone I	Au																		
Data contacts																													
Contact material	Copper alloy																												
Plating termination zone	Au																												
Plating contact zone I	Au																												
D	<div>RJ45 Transceiver must be acc. to INF-8074i. The position of the mechanical reference plane may not exceed the shown values.</div>																												
E	<div></div>																												
F				<div><table><tr><td></td><td>All rights reserved Department EC PD - DE</td><td>Created by HASELOH</td><td>Inspected by LUECKEMEIERM</td><td>Standardisation HOFFMANN</td><td>Date 2016-03-04</td><td>State Final Release</td></tr><tr><td colspan="2">HARTING Electronics GmbH D-32339 Espelkamp</td><td>Title PushPull XS SFP RJ45 Cable</td><td>Type DS</td><td>Number 33255100600</td><td colspan="2">Doc-Key / ECM-Nr. 100605333/UGD/000/A 500000099154</td></tr><tr><td colspan="2"></td><td colspan="3"></td><td>Rev. A</td><td>Page 1/1</td></tr></table></div>					All rights reserved Department EC PD - DE	Created by HASELOH	Inspected by LUECKEMEIERM	Standardisation HOFFMANN	Date 2016-03-04	State Final Release	HARTING Electronics GmbH D-32339 Espelkamp		Title PushPull XS SFP RJ45 Cable	Type DS	Number 33255100600	Doc-Key / ECM-Nr. 100605333/UGD/000/A 500000099154							Rev. A	Page 1/1	
	All rights reserved Department EC PD - DE	Created by HASELOH	Inspected by LUECKEMEIERM	Standardisation HOFFMANN	Date 2016-03-04	State Final Release																							
HARTING Electronics GmbH D-32339 Espelkamp		Title PushPull XS SFP RJ45 Cable	Type DS	Number 33255100600	Doc-Key / ECM-Nr. 100605333/UGD/000/A 500000099154																								
					Rev. A	Page 1/1																							
1	2	3	4	5	6	7	8																						