



CSARL 71.4030.35/DALI

CSA 71 Round (1xLED 40W 830/3000K 4300lm 35 °)

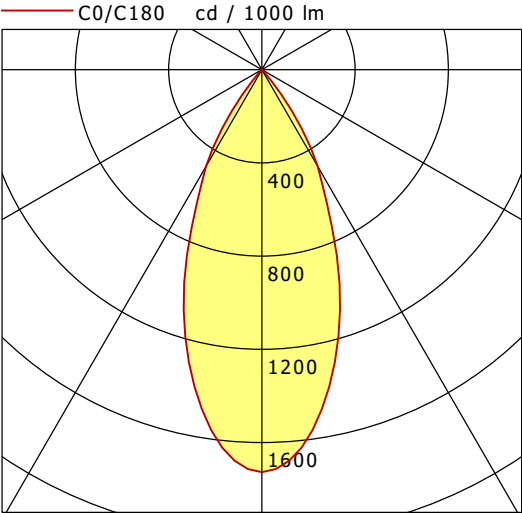

	C0	C90	C180	C270
0°	1727	1727	1727	1727
15°	1244	1244	1244	1244
30°	479	479	479	479
45°	8	8	8	8
60°	4	4	4	4
75°	3	3	3	3
90°	0	0	0	0
cd / 1000 lm				

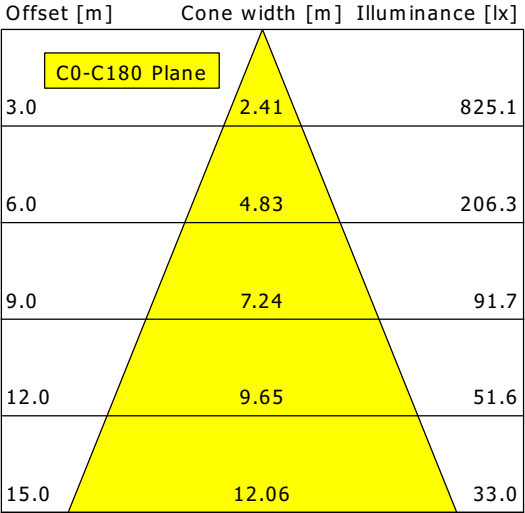

η		LED
Efficiency		108 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		40 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		20.9
UGR C90/C270		20.9
CIE Flux Codes	98 99 100 100 100	
Ra/CRI		> 80