
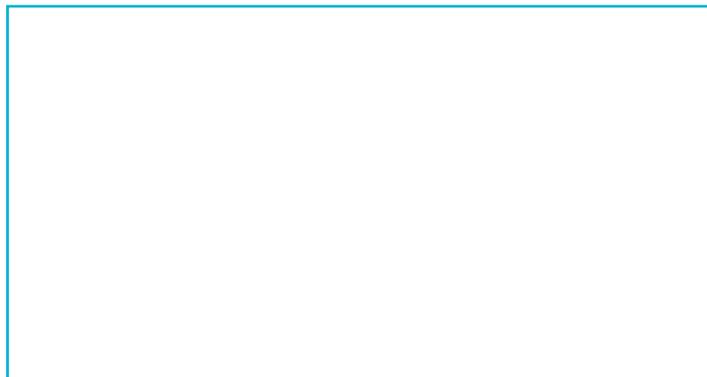


Art. no. 732162

High bay lights Highbay Basic, 210/160/110W,
4000/4500/5700K, black

 **DEKO LIGHT**

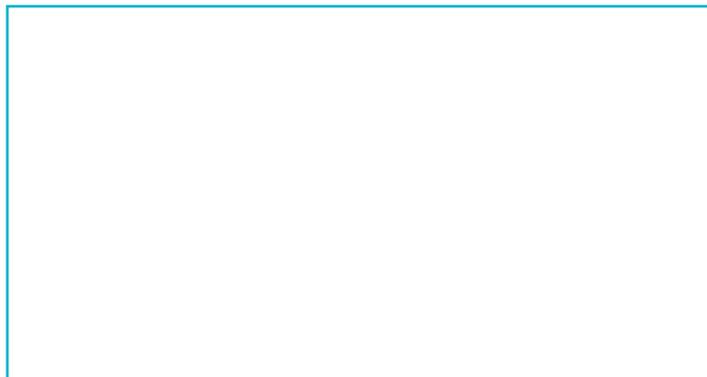

Housing Material	Aluminium, Polycarbonate, Steel	Life Time L80 / B50	60000 h
Housing Color	Black	Switching Cycles	200000
Protection Class	Protection class I/protective grounding	Power Consumption	210 kWh/1000h
Power Selectable	210 W, 160 W, 110 W	Energy Efficiency Class Lightsource	This product contains a light source of energy efficiency class D.
Rated Power Consumption Standby	0.5 W		
Rated Input Voltage Frequency	100-277 V/AC 50 / 60 Hz		
Power Supply Unit incl.	Yes		
Dimmable	No		
Motion Detector	No		
Light Source	Light source changeable TC		
Color Temperature	4000/4500/5700 K		
Colour Consistency	5 SDCM		
Colour consistency light source	5 SDCM		
Colour Rendering Index (Ra)	80		
Rated Luminous Flux	33500/34500/33500 lm		
Rated Angle of Reflection	90 Degree		
UGR	30		
Light Exit Surfaces	1		
Light characteristics	Direct		
Light direction	Below		
Height	111 mm		
Diameter	302 mm		
Working Temperature	-10 to 55 °C		
Storage Temperature	-40 to 85 °C		
IP Protection Class	IP 65		
IK Protection Class	IK08		
Life Time L70 / B50	75000 h		
Life Time L80 / B10	50000 h		