

## Connector TN - with cable gland, with bayonet cover




Product description	
BALS-Prd.-Nr	310167
EAN	4024941108515
Product category	Connector QUICK-CONNECT TN
Current	16A
Number of poles	4p
Poles	3P+PE
Position of earth contact	11 h
Voltage	440 up to 460V, mainly for ship installations
Frequency	60Hz

Product description	
VG-Type-No.:	VG 96919 DS 021
Protection degree	IP67
Colour code	bronze-green RAL 6031-F9
Colour of appliance	Cable gland bronze-green RAL 6031-F9, Bayonet ring bronze-green RAL 6031-F9, Hinged lid bronze-green RAL 6031-F9, Enclosure bronze-green RAL 6031-F9
Connection design	screwless spring terminals as cage clamp with Kontex-contact
Maximum conductor size	2,5 qmm
Cable entry	Cable gland
Height	162mm
Width	79mm
Depth	84mm
Material of enclosure	Polyamide
Contact	The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated

Additional technical properties	
	For cable diameter from 8 up to max. 18 mm, Multi-Grip cable gland with gasket, integrated cable clamp and additional water evacuation openings
	With bayonet cover on strap

Logistics data	
Weight/pcs	0.202 kg / Piece

Logistics data	
Packaging	Bag
Content amount	1 ST
EAN	4024941108515
Length	84 mm
Width	79 mm
Height	162 mm
Weight	0.203 kg
Volume	1,075.032 ccm
Packaging	Carton
Content amount	10 ST
EAN	4024941839853
Length	258 mm
Width	183 mm
Height	212 mm
Weight	2.172 kg
Volume	8,750 ccm

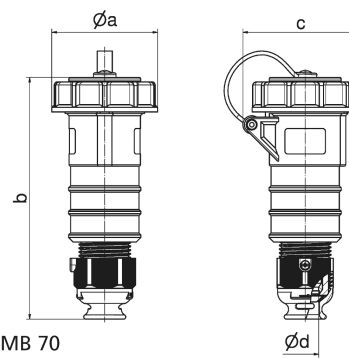

3 MB 70

	16	16	16	32	32	32
<b>Ampere</b>	16	16	16	32	32	32
<b>Polzahl</b>	3	4	5	3	4	5
a ø	70,5	78,0	86,5	94,0	94,0	101,5
b	161,0	161,0	168,0	196,0	196,0	200,0
c	77,0	83,0	93,0	99,0	99,0	107,0
d ø	18,0	18,0	21,0	23,0	23,0	27,0
Leiter mm <sup>2</sup> min	1,0	1,0	1,0	2,5	2,5	2,5
Leiter mm <sup>2</sup> max	2,5	2,5	2,5	6,0	6,0	6,0