

1 2 3 4 5 6

A

B

C

D

length when assembled app. 47

A (2:1)  
contact face acc. to  
IEC 61076-2-101





Ø18,65

Ø16,4

PushPull acc. to  
IEC 61076-2-010

SW14  
width across  
flats: 14

SW15  
width across  
flats: 15

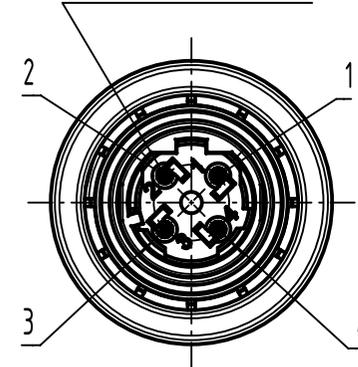

|                         |             |
|-------------------------|-------------|
| conductor cross section | AWG22       |
| cable outside diameter  | 5,7 - 8,8mm |

|   |  |  |                    |                       |                        |  |                     |
|---|--|--|--------------------|-----------------------|------------------------|--|---------------------|
|   | All Dimensions in mm<br>Original Size DIN A4 | Scale 1:1                              |                    | Free size tol.        |                        | Ref.   |                     |
|   |  | Created by 406403                      |                    | Inspected by FARCASIU | Standardisation ROEBEN | Date 2024-02-19  | State Final Release |
| All rights reserved<br>Department EL PD |  | Title M12-PP-CC-IDC-4P-DCOD-M-STR-SHLD |                    |                       |                        | Doc-Key / ECM-Nr.<br>100668768/UGD/001/M<br>500000263544 |                     |
| HARTING<br>D-32339 Espelkamp            |  | Type TB                                | Number 21033821401 |                       |                        | Rev. M   | Page 1/1            |