

Panel mounting socket outlet - angled execution, flange 68x62, fixing centers 53x47




| Product description | |
|---------------------------|---|
| BALS-Prd.-Nr | 4220 |
| EAN | 4024941042208 |
| Product category | Panel mounting socket Outlet, extra-low voltage, angled |
| Current | 32A |
| Number of poles | 3p |
| Poles | 3P |
| Position of earth contact | 2 h |
| Voltage | 20 up to 25 and 40 up to 50V |

| Product description | |
|--------------------------------|--|
| Frequency | 300Hz |
| Protection degree | IP44 |
| Colour code | green RAL 6002 |
| Colour of appliance | Hinged lid green RAL 6002, Enclosure grey RAL 7035 |
| Connection design | with screw terminal |
| Maximum conductor size | 10,0 qmm |
| Cable entry | other |
| Height | 69mm |
| Width | 62mm |
| Depth | 70mm |
| Flange size vertical | 68mm |
| Flange size horizontal | 62mm |
| Drill hole distance vertical | 53mm |
| Drill hole distance horizontal | 47mm |
| Material of enclosure | Polyamide |
| Contact | The contact carrier is made of polyamide, the contacts are brass nickel plated |

| Additional technical properties | |
|---------------------------------|------------------------|
| | The inclination is 20° |

| Logistics data | |
|----------------|------------------|
| Weight/pcs | 0.135 kg / Piece |
| Packaging | Carton |
| Content amount | 10 ST |
| EAN | 4024941836968 |
| Length | 207 mm |
| Width | 162 mm |
| Height | 142 mm |
| Weight | 1.45 kg |
| Volume | 3,750 ccm |

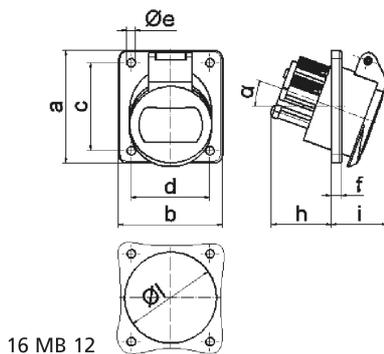

| Ampere | 16 | 16 | 32 | 32 | | |
|----------------------------|------|------|------|------|--|--|
| Polzahl | 2 | 3 | 2 | 3 | | |
| a | 68,0 | 68,0 | 68,0 | 68,0 | | |
| b | 62,0 | 62,0 | 62,0 | 62,0 | | |
| c | 53,0 | 53,0 | 53,0 | 53,0 | | |
| d | 47,0 | 47,0 | 47,0 | 47,0 | | |
| e ø | 5,2 | 5,2 | 5,2 | 5,2 | | |
| f | 6,0 | 6,0 | 6,0 | 6,0 | | |
| h | 36,0 | 36,0 | 36,0 | 36,0 | | |
| i | 35,0 | 35,0 | 35,0 | 35,0 | | |
| α | 20° | 20° | 20° | 20° | | |
| l ø | 55,0 | 55,0 | 55,0 | 55,0 | | |
| Leiter mm ² min | 4 | 4 | 4 | 4 | | |
| Leiter mm ² max | 10 | 10 | 10 | 10 | | |