


# LKIP-L 070.10840.1968.1/DALI

Lichtkanal 070 IP | Light-Insert (AOB, 1xLED 52W 840/4000K 5410lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

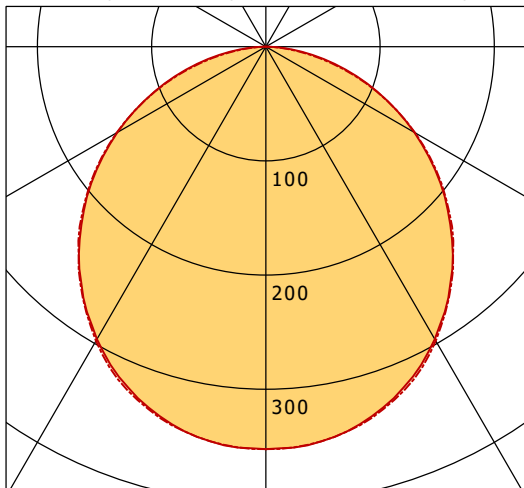

	C0	C90	C180	C270
0°	352	352	352	352
15°	339	340	339	340
30°	296	298	296	298
45°	230	232	230	232
60°	150	151	150	151
75°	67	64	67	64
90°	1	1	1	1
cd / 1000 lm				

Offset [m]    Cone width [m]    Illuminance [lx]

Offset [m]	C0-C180 Plane	C90-C270 Plane	Illuminance [lx]
3.0	8.65   8.73		211.9
6.0	17.30   17.46		53.0
9.0	25.94   26.18		23.5
12.0	34.59   34.91		13.2
15.0	43.24   43.64		8.5

<b>η</b>	LED
Efficiency	104 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	52 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	25.7
UGR C90/C270	25.5
CIE Flux Codes	47 79 96 100 100
Ra/CRI	>80