



SCOUT 204.940.35.2/DALI-ST

Scout Next (1xLED 38W 940/4000K 4390lm 35°)

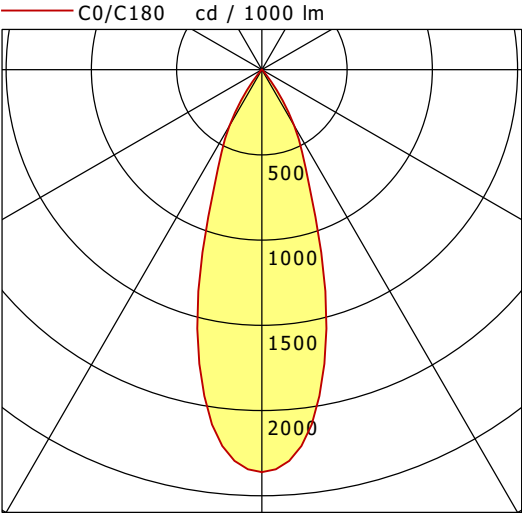

	C0	C90	C180	C270
0°	2361	2361	2361	2361
15°	1461	1461	1461	1461
30°	379	379	379	379
45°	12	12	12	12
60°	1	1	1	1
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

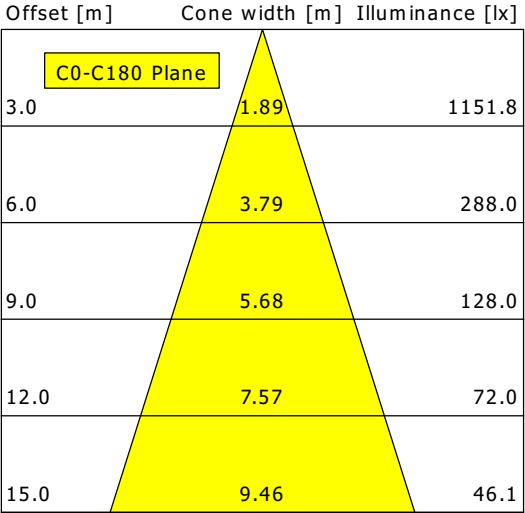

η		LED
Efficiency		116 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		38 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		19.3
UGR C90/C270		19.3
CIE Flux Codes	99 100 100 100 100	
Ra/CRI		>90