


# CHOCM-R 171.840.80.02/DALI


Choc | Recessed (1xLED 13W 840/4000K 1470lm 80 °)

— C0/C180 cd / 1000 lm    - - - C90/C270

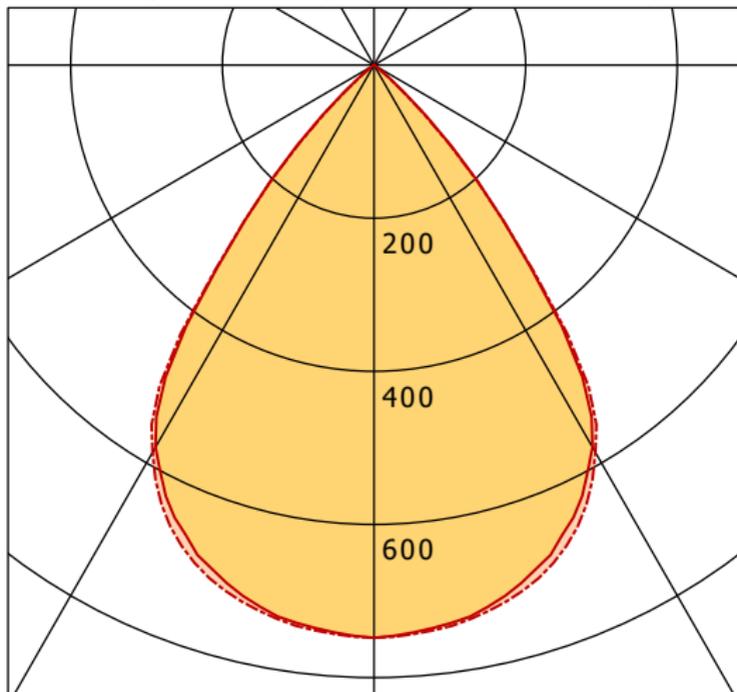

|              | C0  | C90 | C180 | C270 |
|--------------|-----|-----|------|------|
| 0°           | 748 | 748 | 748  | 748  |
| 15°          | 710 | 718 | 710  | 718  |
| 30°          | 576 | 584 | 576  | 584  |
| 45°          | 120 | 114 | 120  | 114  |
| 60°          | 0   | 0   | 0    | 0    |
| 75°          | 0   | 0   | 0    | 0    |
| 90°          | 0   | 0   | 0    | 0    |
| cd / 1000 lm |     |     |      |      |

Offset [m]    Cone width [m]    Illuminance [lx]

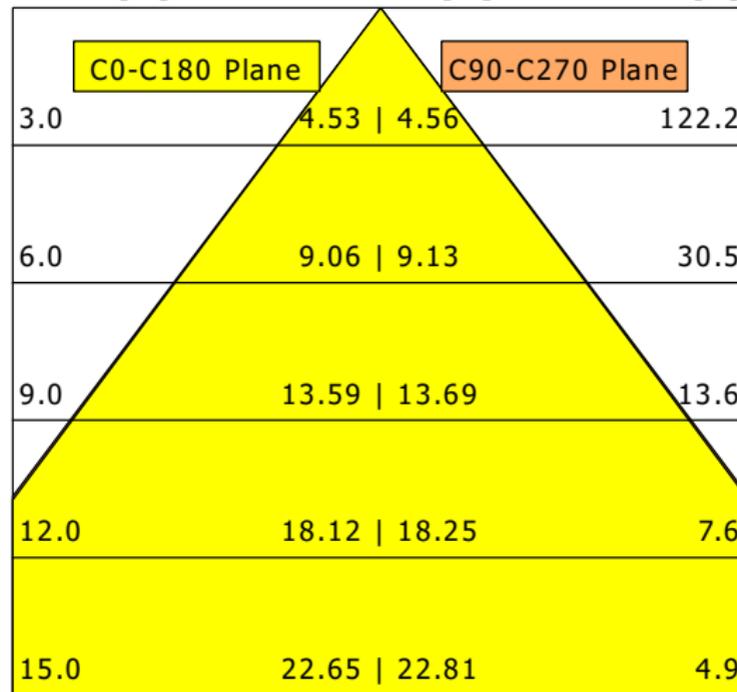

|                    |                    |
|--------------------|--------------------|
| <b>η</b>           | LED                |
| Efficiency         | 113 lm/W           |
| Direct/Indirect    | ↓ 100% / ↑ 0%      |
| System Power       | 13 W               |
| <b>UGR</b>         | X=4H, Y=8H         |
| Reflection factors | 70/50/20           |
| UGR C0/C180        | 18.9               |
| UGR C90/C270       | 18.9               |
| CIE Flux Codes     | 89 100 100 100 100 |
| Ra/CRI             | >80                |