



FLIR 200.2030.35/DALI

Flix 200 Round (FLIRZ 200.05, 1xLED 27W 830/3000K 2950lm 35 °)

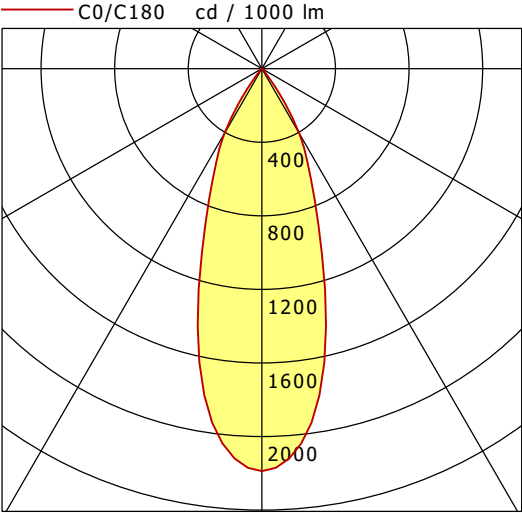

	C0	C90	C180	C270
0°	2188	2188	2188	2188
15°	1344	1344	1344	1344
30°	409	409	409	409
45°	18	18	18	18
60°	14	14	14	14
75°	6	6	6	6
90°	0	0	0	0
cd / 1000 lm				

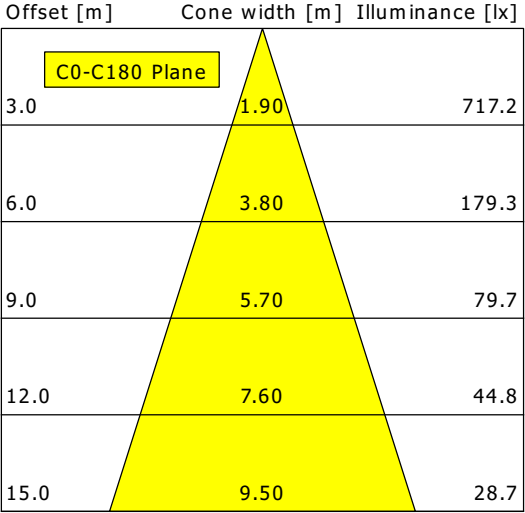

η		LED
Efficiency		109 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		27 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		20.6
UGR C90/C270		20.6
CIE Flux Codes	96 98 100 100 100	
Ra/CRI		> 80