
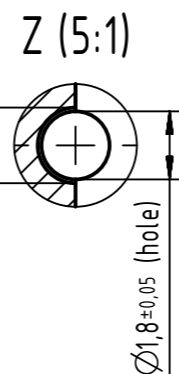


PCB layout, component side

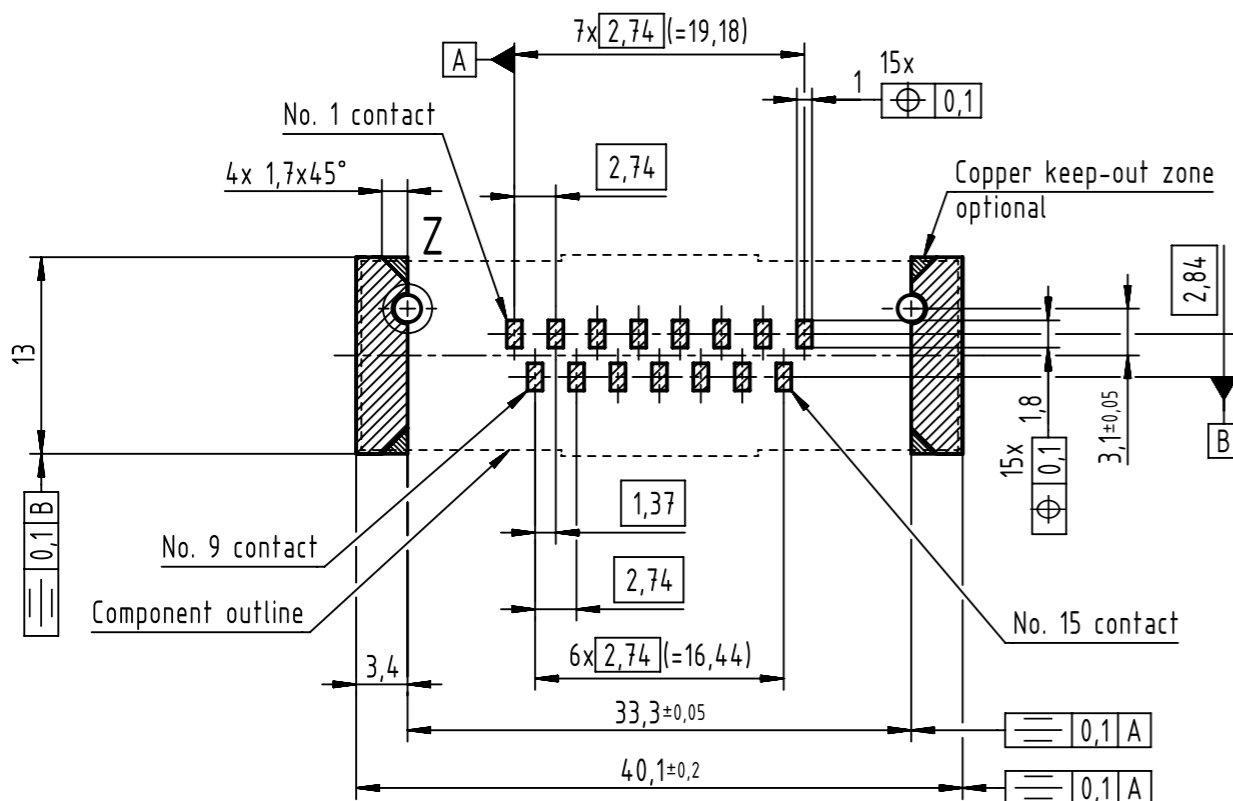

Max. Temperature: 260°C during 10 seconds.
Find further technical information on DS 09550200302

0955 229 6822 333	2	4-40 UNC	Black insulator	Samples
0955 229 3821 741	1	M3	Black insulator	Reel packing: 140 connectors
0955 229 3822 741	1	4-40 UNC		
0955 229 6821 741	2	M3		
0955 229 6822 741	2	4-40 UNC		
0955 229 7821 741	3	M3		
0955 229 7822 741	3	4-40 UNC		
Part number	PL	Nut	Index designation	

All Dimensions in mm Original Size DIN A3		Scale 2:1	Free size tol.		Ref.
All rights reserved Department EL PD		Created by ZHUANGJ	Inspected by LUOK	Standardisation HOFFMANN	Date 2018-11-29
HARTING Electronics GmbH D-32339 Espelkamp		Title D-Sub str SMT 15-pole male with screwlock & ground pad			State Final Release
Type TB	Number 0955229X82X	Doc-Key / ECM-Nr. 100236630/UGD/001/C 500000139800		Rev. C	Page 1/1