


ORYO-T 203.930.15

Oryo 200 | Track-Mounted (1xLED 30W 930/3000K 2950lm 15°)

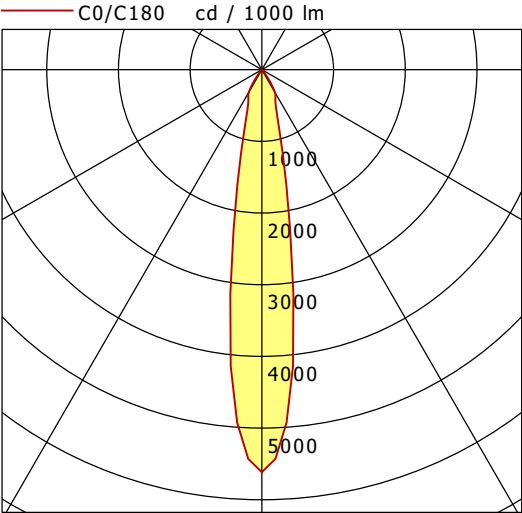

	C0	C90	C180	C270
0°	5615	5615	5615	5615
15°	1034	1034	1034	1034
30°	365	365	365	365
45°	10	10	10	10
60°	9	9	9	9
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
C0-C180 Plane		
3.0	0.93	1840.4
6.0	1.86	460.1
9.0	2.79	204.5
12.0	3.72	115.0
15.0	4.65	73.6

η		LED
Efficiency		99 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		30 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		18.9
UGR C90/C270		18.9
CIE Flux Codes	98 100 100 100 100	
Ra/CRI		> 90